


Economy Power

TE Internal #: 1744057-5 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [.156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

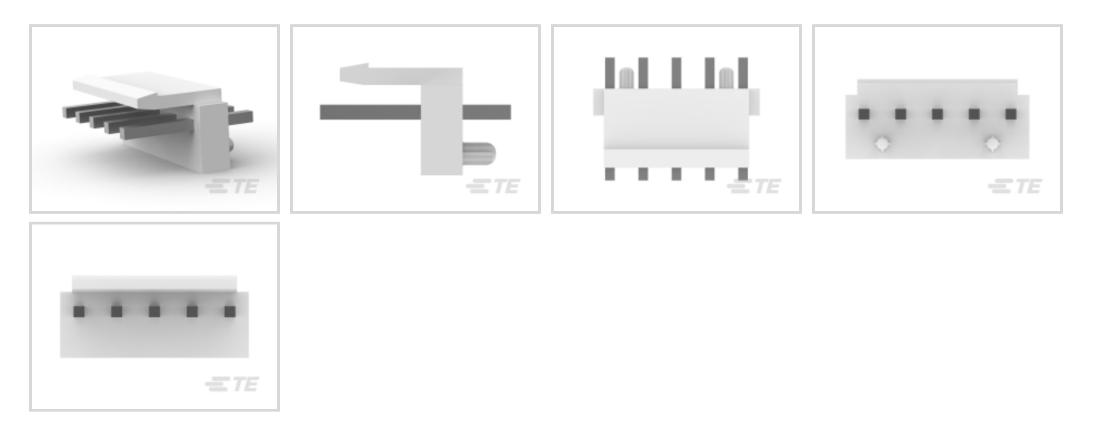

Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 5

Centerline (Pitch): 3.96 mm [.156 in]

Features

E T E connectivity

Product Type Features

Header Type	Partially Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	5
PCB Mount Orientation	Vertical
Number of Power Positions	5
Number of Power Positions Number of Rows	5 1
	5
Number of Rows	5 1 250 VAC

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Mating Post Length	7.7 mm[.303 in]	
PCB Contact Termination Area Plating Material Thickness	.8 μm, 2 μm[31.49 μin][80 μin]	
Contact Layout	Inline	
Contact Mating Area Plating Material	Tin	
Contact Base Material	Brass	
Contact Current Rating (Max)	8 A	
Contact Retention Within Housing	Without	
Contact Type	Pin	
PCB Contact Termination Area Plating Material	Tin	
Contact Mating Area Plating Material Thickness	3 μm[118.11 μin]	
Termination Features		
Termination Post & Tail Length	3.7 mm[.146 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Strain Relief	Without	
Mating Alignment Type	Polarizing Tab	
Mating Retention	With	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	With	
Mating Retention Type	Latch	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	3.96 mm[.156 in]	
Housing Color	Natural	
Housing Material	Nylon 66	
Dimensions		
Connector Height	10.9 mm[.429 in]	
PCB Thickness (Recommended)	.06 mm[1.6 in]	
Product Width	8.2 mm[.323 in]	
Product Length	19.74 mm[.777 in]	
Usage Conditions		

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	1000
Packaging Method	Bag
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2021 (211)

(211) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Wave solder capable to 265°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power








Also in the Series | Economy Power





Insertion & Extraction Tools(1)








PCB Latches Locks & Retainers(2)


Connector Contacts(1)	Insertion & Extraction Tools(1)	PCB Headers & Receptacles(162)	PCB Latches, Locks & Retainers(2)
Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(302)	Wire-to-Board Connector Assemblies & Housings(142)

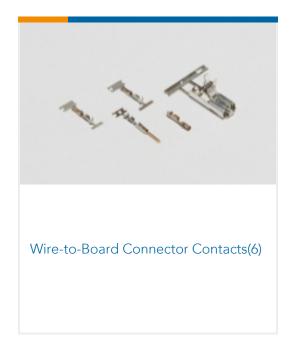

Customers Also Bought

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



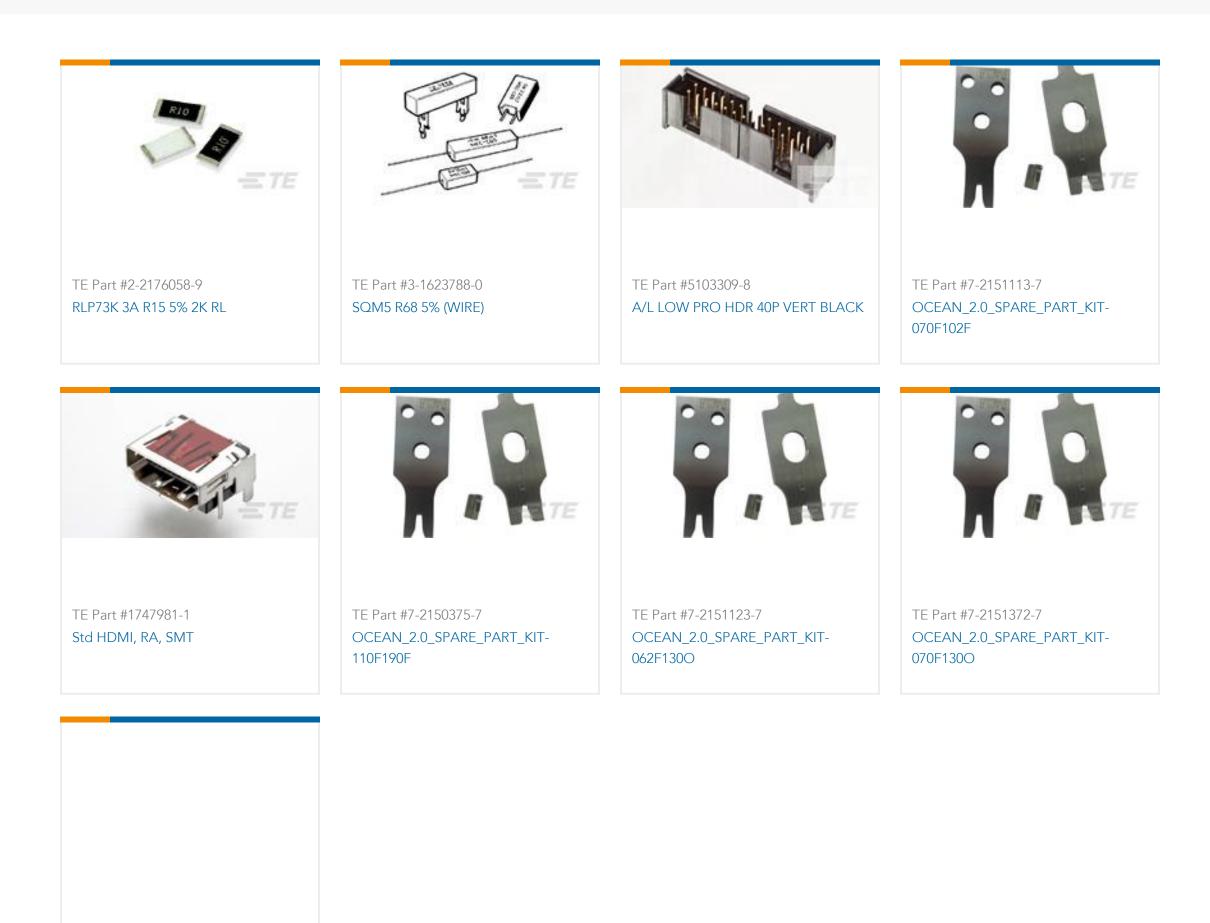

TE Part #9-329631-3 JAM NUT

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_1744057-5_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1744057-5_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1744057-5_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773885-9 Economy Power Connectors

English

7-1773458-5_ECONOMY_POWER_QRG

English

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 5 Position, 3.96 mm [. 156 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Product Specifications Application Specification

English

Agency Approvals UL Report

English