

1747996-3 ✓ ACTIVE

## GRACE INERTIA 12.4


TE Internal #: 1747996-3

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 2 Position, 12.4 mm [.488 in] Centerline, Printed Circuit Board, GRACE INERTIA 12.4

[View on TE.com >](#)



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

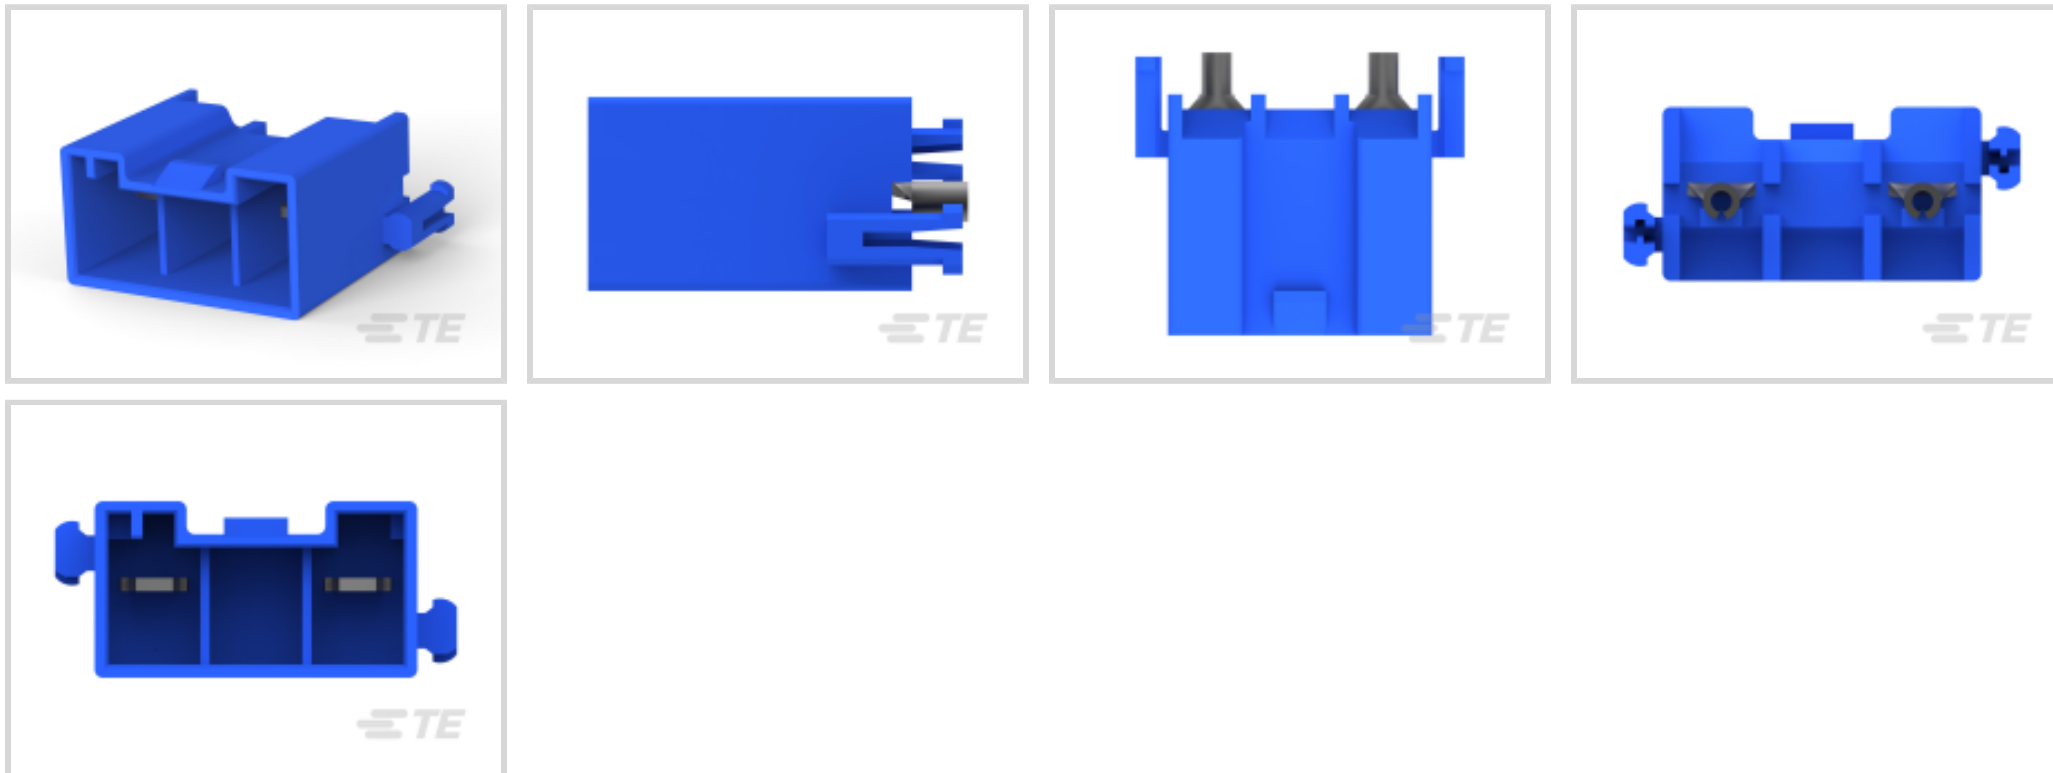

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Centerline (Pitch): **12.4 mm [.488 in]**

### Features

#### Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

#### Configuration Features

Number of Positions	2
PCB Mount Orientation	Vertical
Number of Power Positions	2
Number of Signal Positions	0
Number of Rows	1

#### Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------



### Body Features

Connector & Keying Code	C
-------------------------	---

### Contact Features

Contact Layout	Inline
Mating Tab Width	3.1 mm[.122 in]
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	20 A
Contact Retention Within Housing	With
Contact Type	Tab
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.8 $\mu$ m[31.5 $\mu$ in]

### Termination Features

Termination Post & Tail Length	3.1 mm[.122 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

### Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Keyed
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention Type	Latch
Connector Mounting Type	Board Mount

### Housing Features

Centerline (Pitch)	12.4 mm[.488 in]
Housing Color	Blue
Housing Material	Nylon 6/6 GF

### Dimensions

Connector Height	10.7 mm[.421 in]
------------------	------------------



Wire Size 2427 – 7144 CMA

### Usage Conditions

Operating Temperature Range -40 – 105 °C[-40 – 221 °F]

### Operation/Application

Circuit Application Power

### Industry Standards

UL Flammability Rating UL 94V-0

Glow Wire Rating GWT 750°C (Without Flame)

### Packaging Features

Packaging Quantity 150

Packaging Method Bag

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU Compliant

EU ELV Directive 2000/53/EC Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006  
 Current ECHA Candidate List: JUNE 2023 (235)  
 Candidate List Declared Against: JUNE 2023 (235)  
 Does not contain REACH SVHC

Halogen Content Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1747996-2  
GHC EYELET 12.4 2POS HEADER ASSY RED



TE Part # 1747995-3  
GHC EYELET 6.2 3POS PLUG HOUSING BLUE



TE Part # 1747996-1  
GHC EYELET 12.4 2POS HEADER ASSY NATURAL

## Also in the Series | GRACE INERTIA 12.4



Rectangular Power Connectors(4)

## Customers Also Bought



TE Part #1734795-1  
RJ45,8P8C,SHD,W/O LED,DIP 6u"



TE Part #1-2324245-6  
ASSY,HDR,VERT,GWT,BOSSSED,DUAL ROW, EP2.5



TE Part #2-1903415-1  
GHC 9.0 3POS HDR ASSY BLUE



TE Part #1747996-1  
GHC EYELET 12.4 2POS HEADER ASSY NATURAL



TE Part #1-1903415-1  
GHC 9.0 3POS HDR ASSY RED




TE Part #2-2324245-4  
ASSY,HDR,VERT,GWT,BOSSSED,DUAL ROW, EP2.5



TE Part #2-2360442-0  
FOAMING PROOF UPPER TPA 2POS 20AWG



TE Part #4-2324245-0  
ASSY,HDR,VERT,GWT,BOSSSED,DUAL ROW, EP2.5

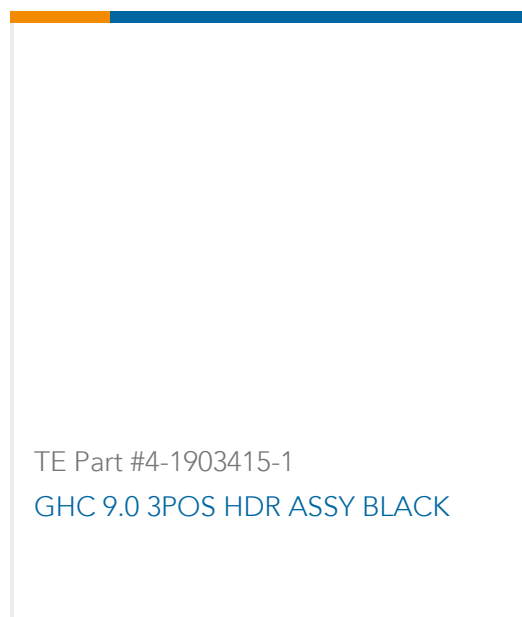

## Documents

### Product Drawings

[GHC EYELET 12.4 2POS HEADER ASSY BLUE](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1747996-3\\_F.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1747996-3\\_F.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1747996-3\\_F.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[1-1773883-5 GRACE INERTIA connector quick reference guide](#)

English

### Product Specifications

[Application Specification](#)

English

### Product Environmental Compliance

[MD\\_1747996-3\\_101220122352](#)

English

[MD\\_1747996-3\\_101220122352](#)

English