




Connectors > Power Connectors > Power Contacts

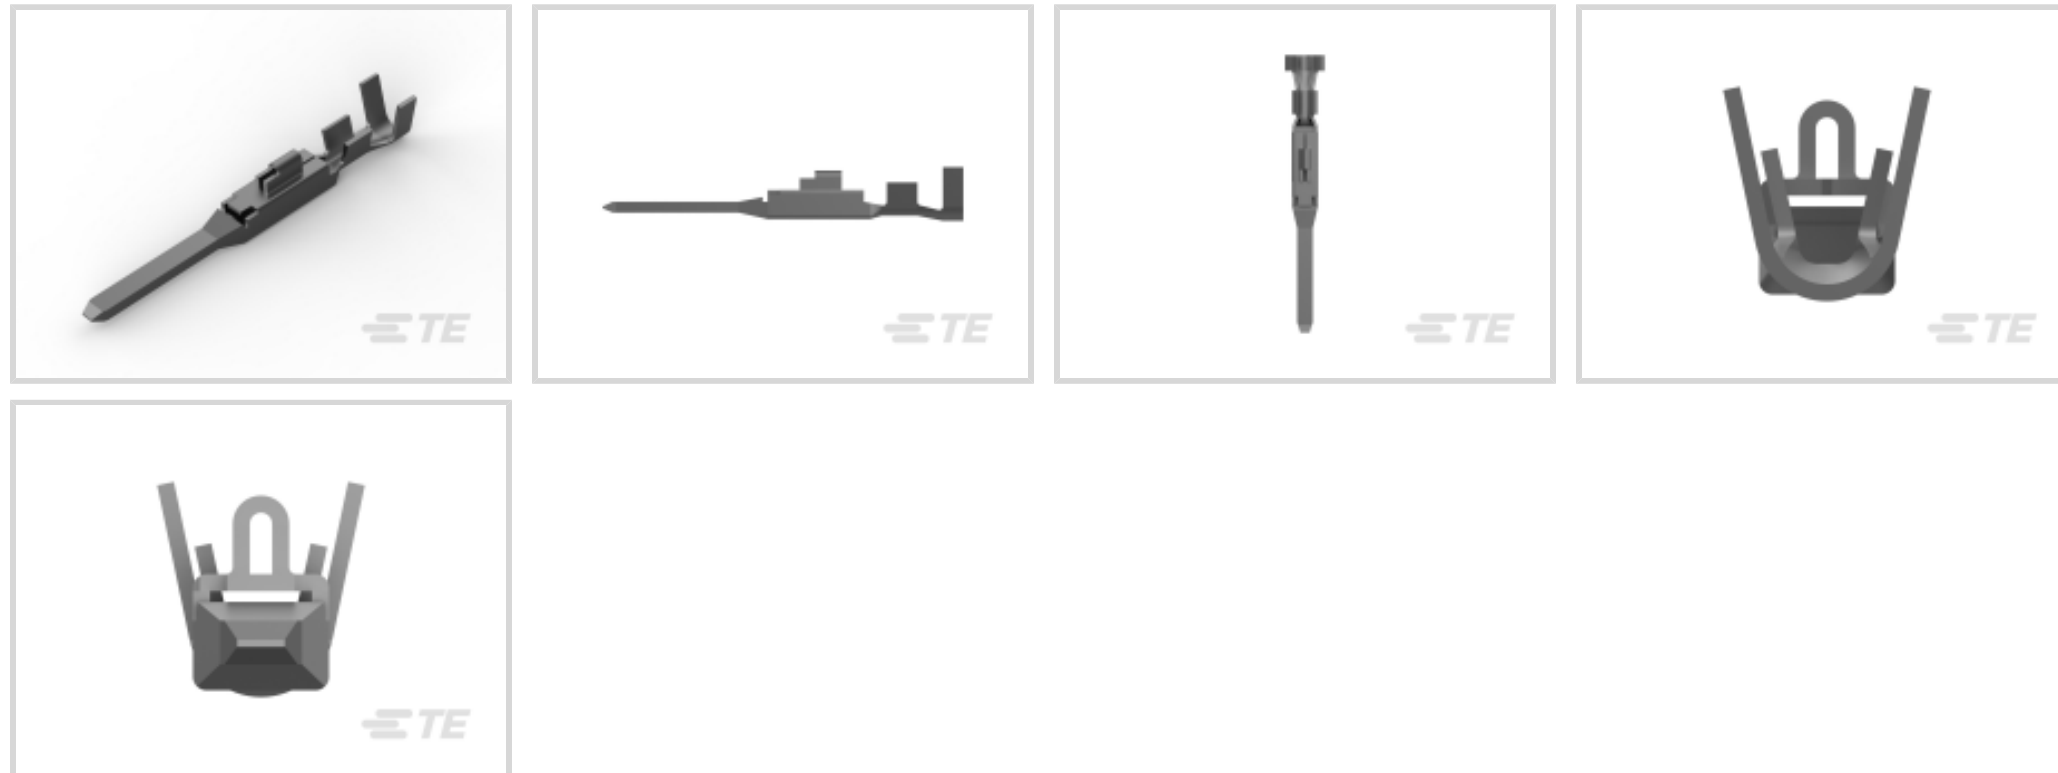

Power Contact Type: **Contact**

Operating Voltage: **50 VAC, 300 VAC**

Contact Mating Area Plating Material: **Tin**

Wire Size: **.12 – .35 mm²**

Features

Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Operating Voltage	50 VAC, 300 VAC
-------------------	-----------------

Contact Features

Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	12 A
Contact Type	Tab
Contact Retention Within Housing	With
Mating Tab Width	1.2 mm[.047 in]
Mating Tab Thickness	.64 mm[.023 in]
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.8 μm[31.49 μin]
Wire Contact Termination Area Plating Thickness	.8 μm[31.49 μin]
Wire Contact Termination Area Plating Material	Pre-Tin



Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	.12 – .35 mm ²
Compatible Insulation Diameter Range	1.2 – 2 mm [.047 – .079 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag & Box

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 176301-1
UNVI POWER CAP HSG 18P PNL MTG



TE Part # 176291-1
UNIV POWER CAP HSG 18P F/H



TE Part # 176299-1
UNVI POWER CAP HSG 12P PNL MTG



TE Part # 176290-1
UNIV POWER CAP HSG 15P F/H




TE Part # 176295-1
UNIV POWER CAP HSG 6P P/MOUNT



TE Part # 176286-1
UNIV POWER CAP HSG 8P F/H




TE Part # 176284-1
AMP UNIVERSAL POWER CAP 4P



TE Part # 176285-1
AMP UNIVERSAL POWER CAP 6P



TE Part # 176285-6
AMP UNIVERSAL POWER CAP 6P

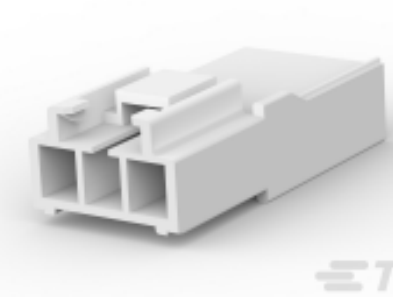


TE Part # 176283-1
AMP UNIVERSA POWR CAP 3P



TE Part # 176282-4
AMP UNIVERSAL POWER CAP 2P



TE Part # 176282-1
AMP UNIVERSAL POWER CAP 2P

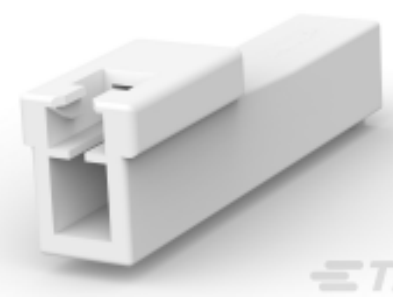

TE Part # 176281-1
UNIV POWER CAP HSG 1P F/H



TE Part # 176284-9
AMP UNIVERSAL POWER CAP 4P






TE Part # 176288-1
UNIV POWER CAP HSG 10P F/H




TE Part # 176289-1
UNIV POWER CAP HSG 12P F/H



Also in the Series | AMP Universal Power

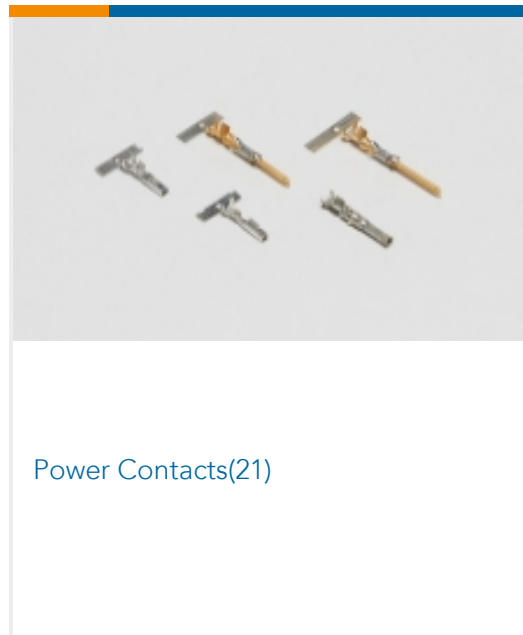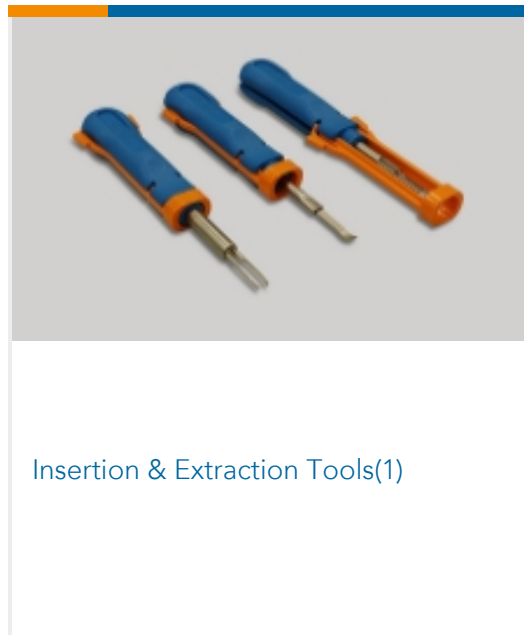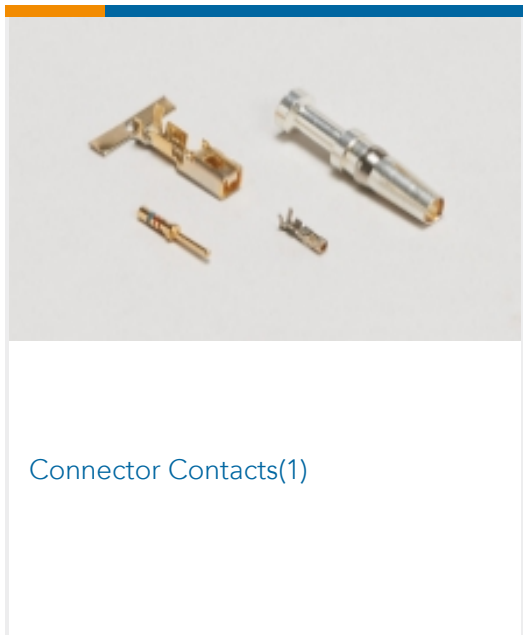

Customers Also Bought

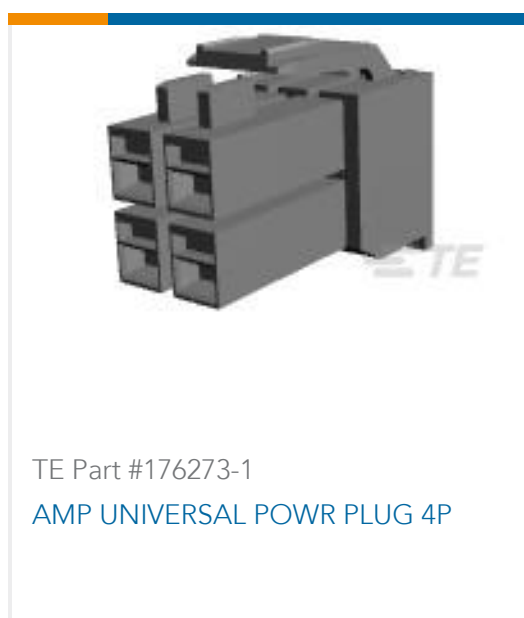



Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_175153-1_P.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175153-1_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175153-1_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of Universal Power Contact

English

Product Specification

Japanese

AMP Universal Power Connector

Japanese

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Extraction Tool for UP(913923-1)

English

Instruction Sheet (non U.S.)

English

Hand Tool, PN 914181-1, Universal Power Contact (Was IS-505J)

Japanese

Instruction Sheet (non U.S.)

English