

TE Internal #: 1775855-1 Combo Jacks, 2 x 1, Single Port, RJ45 over Single USB, Standard Profile, Combo Jacks, Standard Connector Contact Density, Jack, Shielded

View on TE.com >



Connectors > Modular Jacks & Plugs > Combo Jacks



Port Matrix Configuration: 2x1

Port Configuration: Single Port

Modular Jack & Plug Interface Type: RJ45 over Single USB

Connector Profile: Standard

Modular Jacks & Plugs Products: Combo Jacks

Features

Product Type Features

Connectors & Connector Components Type	Connector	
Modular Jack & Plug Interface Type	RJ45 over Single USB	
Modular Jacks & Plugs Products	Combo Jacks	
Modular Connector Style	Jack	
Grounding Options	PCB Ground	
Connector System	Cable-to-Board	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Status Indicator Type	None	
Number of Ports	1	
PCB Mount Orientation	Right Angle	
Port Matrix Configuration	2 x 1	
Port Configuration	Single Port	
Connector Contact Density	Standard	
Number of Positions	4, 8	

C For support call+1 800 522 6752

Combo Jacks, 2 x 1, Single Port, RJ45 over Single USB, Standard Profile, Combo Jacks, Standard Connector Contact Density, Jack, Shielded



Number of Loaded Positions	4, 8
Body Features	
Shell Plating Material	Nickel
Connector Profile	Standard
Modular Jack Latch Orientation	Inverted - Latch Up
Shield Material	Brass
Shield Plating Material	Nickel
Contact Features	
Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1 A, 1.5 A
PCB Contact Termination Area Plating Material	Gold Flash
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Housing Color	Black
Housing Material	PBT GF30
Centerline (Pitch)	1.02 mm, 2 mm, 2.5 mm[.04 in][.07 in][.09 in]
Dimensions	
PCB Thickness (Recommended)	1.6 mm[.063 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C, -40 – 85 °C[-67 – 185 °F][-40 – 185 °F]
Operation/Application	
Shielded	Yes
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Performance Category	Cat 3

Combo Jacks, 2 x 1, Single Port, RJ45 over Single USB, Standard Profile, Combo Jacks, Standard Connector Contact Density, Jack, Shielded



Packaging Features

Packaging Quantity	50	
Packaging Method	Box & Tray, Tray	
Other		
Modular Jacks & Plugs Comment	Hot tin dip on shield's legs, RJ45 over USB	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	

EU REACH Regulation (EC) No. 1907/2006

Halogen Content

Solder Process Capability

Wave solder capable to 265°C

Does not contain REACH SVHC

(235)

ppm.

2022 (224)

Current ECHA Candidate List: JUNE 2023

Candidate List Declared Against: JUNE

Not Low Halogen - contains Br or Cl > 900

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Combo Jacks, 2 x 1, Single Port, RJ45 over Single USB, Standard Profile, Combo Jacks, Standard Connector Contact Density, Jack, Shielded





Customers Also Bought

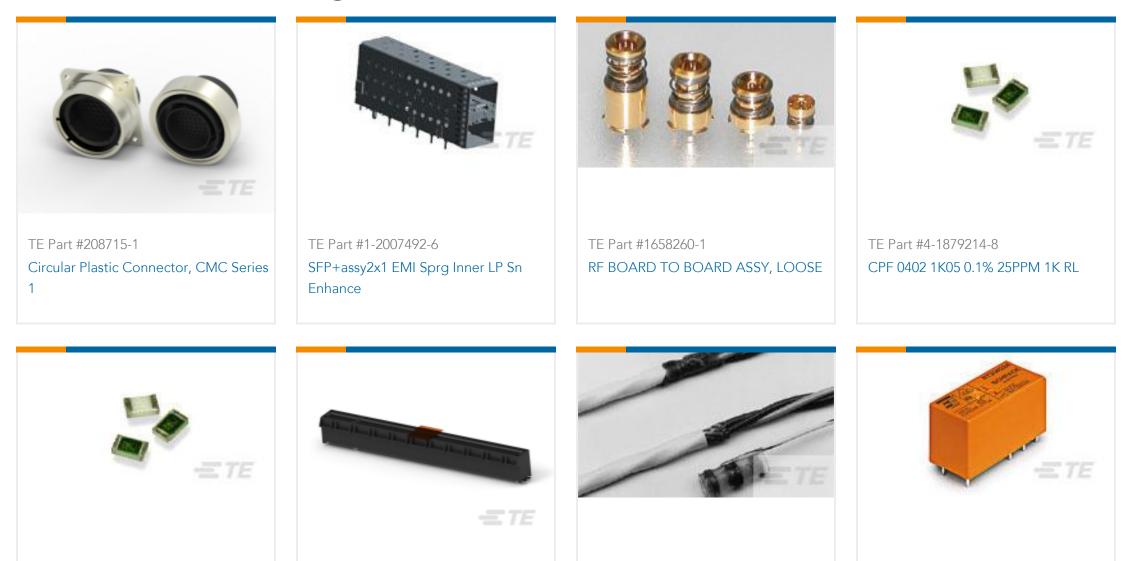

CPF 0402 4K99 0.1% 25PPM 1K RL	PCIE GEN4 CON,SMT,164POS,30u",	S02-10-R	RTD34012
	MYLAR,HT		

TE Part #669507-000

TE Part #2-1649328-2

TE Part #5-2337939-4



Documents

TE Part #1-1879215-0

CAD Files

Customer View Model

ENG_CVM_CVM_1775855-1_D.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1775855-1_D.3d_igs.zip

English

Combo Jacks, 2 x 1, Single Port, RJ45 over Single USB, Standard Profile, Combo Jacks, Standard Connector Contact Density, Jack, Shielded



Customer View Model

ENG_CVM_CVM_1775855-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English