




Connectors > Terminal Blocks & Strips > Barrier Strips

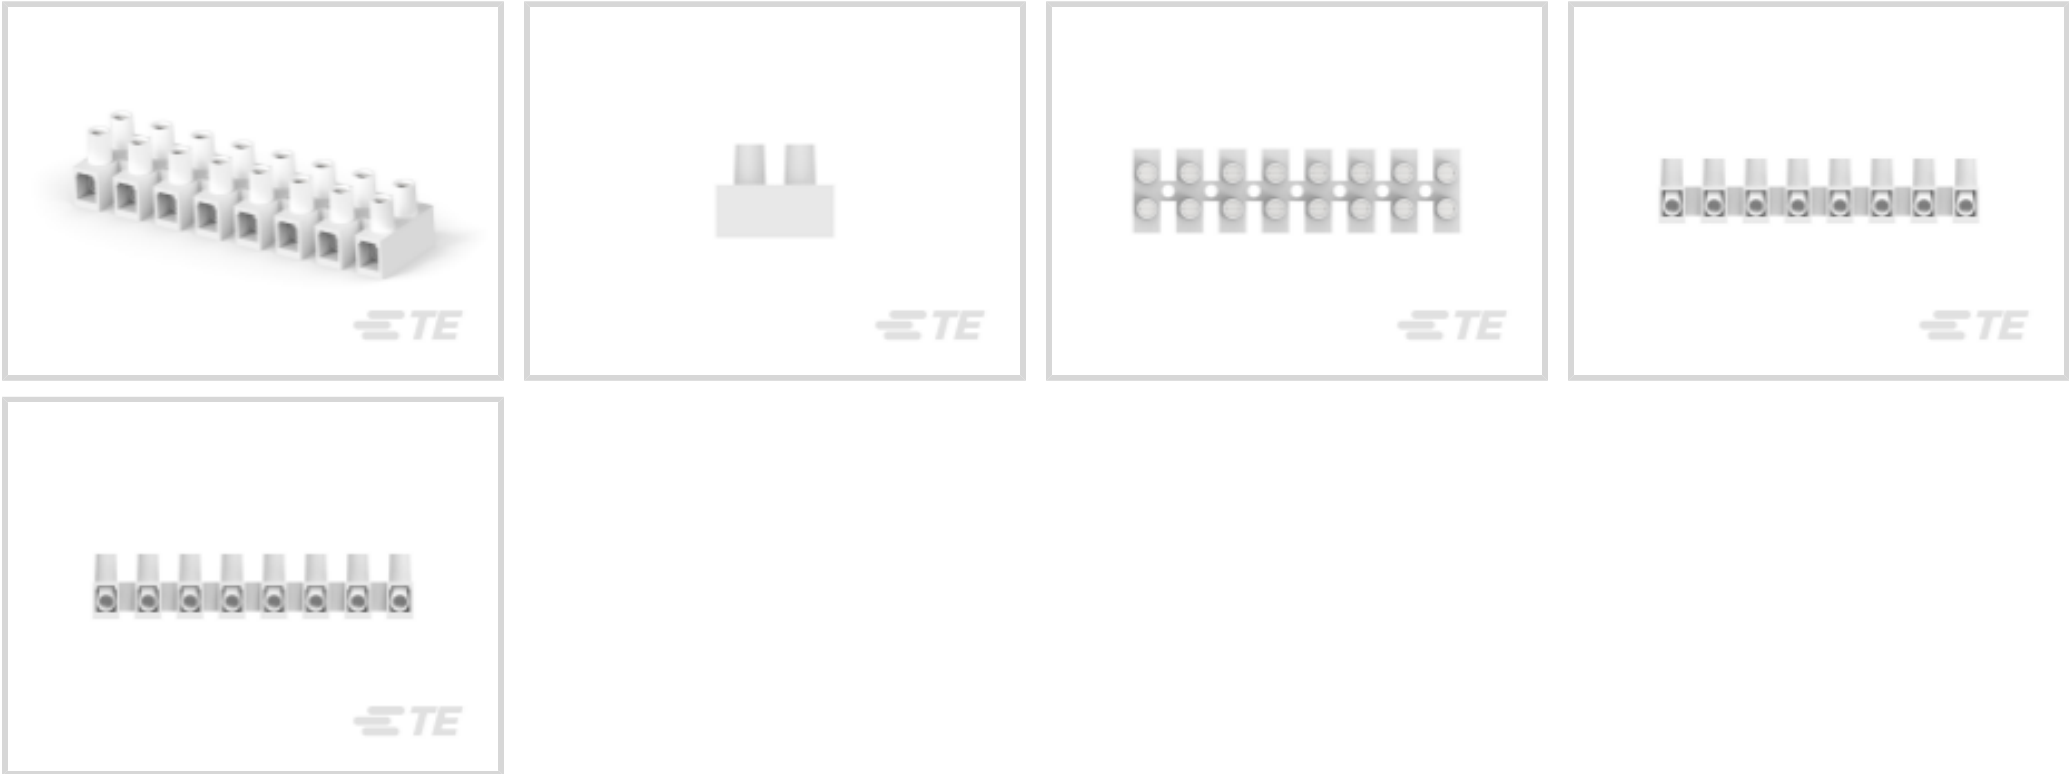

Connector System: **Wire-to-Wire**

Number of Positions: **8**

Centerline (Pitch): **12 mm [.472 in]**

Number of Rows: **1**

Operating Voltage: **250 V**

Features

Product Type Features

| | |
|-----------------------------------|--------------|
| Block Style | None |
| Connector System | Wire-to-Wire |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|---------------------|---|
| Number of Levels | 1 |
| Number of Positions | 8 |
| Number of Rows | 1 |

Electrical Characteristics

| | |
|-------------------|-------|
| Operating Voltage | 250 V |
|-------------------|-------|

Body Features

| | |
|------------------------------------|-------------|
| Quick Connect Tab Plating Material | Tin |
| Primary Product Color | Natural |
| Product Orientation | Right Angle |



Contact Features

| | |
|------------------------------|-------|
| Contact Base Material | Brass |
| Contact Current Rating (Max) | 40 A |

Mechanical Attachment

| | |
|-------------------------|-------------------------------|
| Screw Plating Material | Zinc Chromate |
| Screw Material | Steel |
| Mounting Options | 3.6mm Diameter Mounting Holes |
| Thread Size | M3.5 |
| Connector Mounting Type | Panel Mount |

Housing Features

| | |
|--------------------|-----------------|
| Housing Material | Polyamide 6 |
| Centerline (Pitch) | 12 mm [.472 in] |

Dimensions

| | |
|-----------|------------|
| Wire Size | .3 – 6 mm² |
|-----------|------------|

Usage Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | -35 – 100 °C [-31 – 212 °F] |
|-----------------------------|-----------------------------|

Operation/Application

| | |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

| | |
|------------------------|----------|
| UL Flammability Rating | UL 94V-2 |
|------------------------|----------|

Packaging Features

| | |
|--------------------|---------|
| Packaging Quantity | 100 |
| Packaging Method | Package |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) |



SVHC > Threshold:
Pb (3% in Component Part)

Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

| | |
|-----------------|---|
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
|-----------------|---|

| | |
|---------------------------|--|
| Solder Process Capability | Not applicable for solder process capability |
|---------------------------|--|

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 1546301-8
TSB1000 08MDS=12MM W/WIRE STOP




TE Part # 1776303-8
TSB100008=EUROPA TERM BLK, 12MM

Customers Also Bought



TE Part #MS583730BA01-50
MS5837-30BA01 30BA T&R PRESSURE SEN



TE Part #1-2176232-5
3522 510K 1% 3W




TE Part #2358714-1
ICCON BLOCK SIZE 10.3mm PIN




TE Part #2358715-1
ICCON BLOCK SIZE 10.3mm SOCKET







TE Part #2368390-1
ICCON Block Size 10.3mm Vertical Socket




TE Part #2-1614958-6
CPF 0805 1R78 0.1% 25ppm 1K RL




TE Part #5-1614958-4
CPF 0805 3R48 0.1% 25ppm 1K RL



TE Part #5-1614958-8
CPF 0805 3R83 0.1% 25ppm 1K RL



TE Part #6-1614958-2
CPF 0805 4R22 0.1% 25ppm 1K RL



TE Part #6-1614958-5
CPF 0805 4R53 0.1% 25ppm 1K RL

Documents

Product Drawings

TSB100008DS=EUROPA TM BLK,12MM

English

CAD Files

Customer View Model

ENG_CVM_1776302-8_O.3d_igs.zip

English

Customer View Model

ENG_CVM_1776302-8_O.3d_stp.zip

English

Customer View Model

ENG_CVM_1776302-8_O.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BUCHANAN TERMINAL BLOCKS CATALOG - EUROPA TERMINAL BLOCKS

English