




Power Double Lock

TE Internal #: 179593-1

Power Contacts, Contact, 50 VAC / 300 VAC, Tin, 20 – 16 AWG
 Wire Size, .52 – 1.38 mm² Wire Size, Wire & Cable, Crimp, Power,
 Power Double Lock

[View on TE.com >](#)

Connectors > Power Connectors > Power Contacts

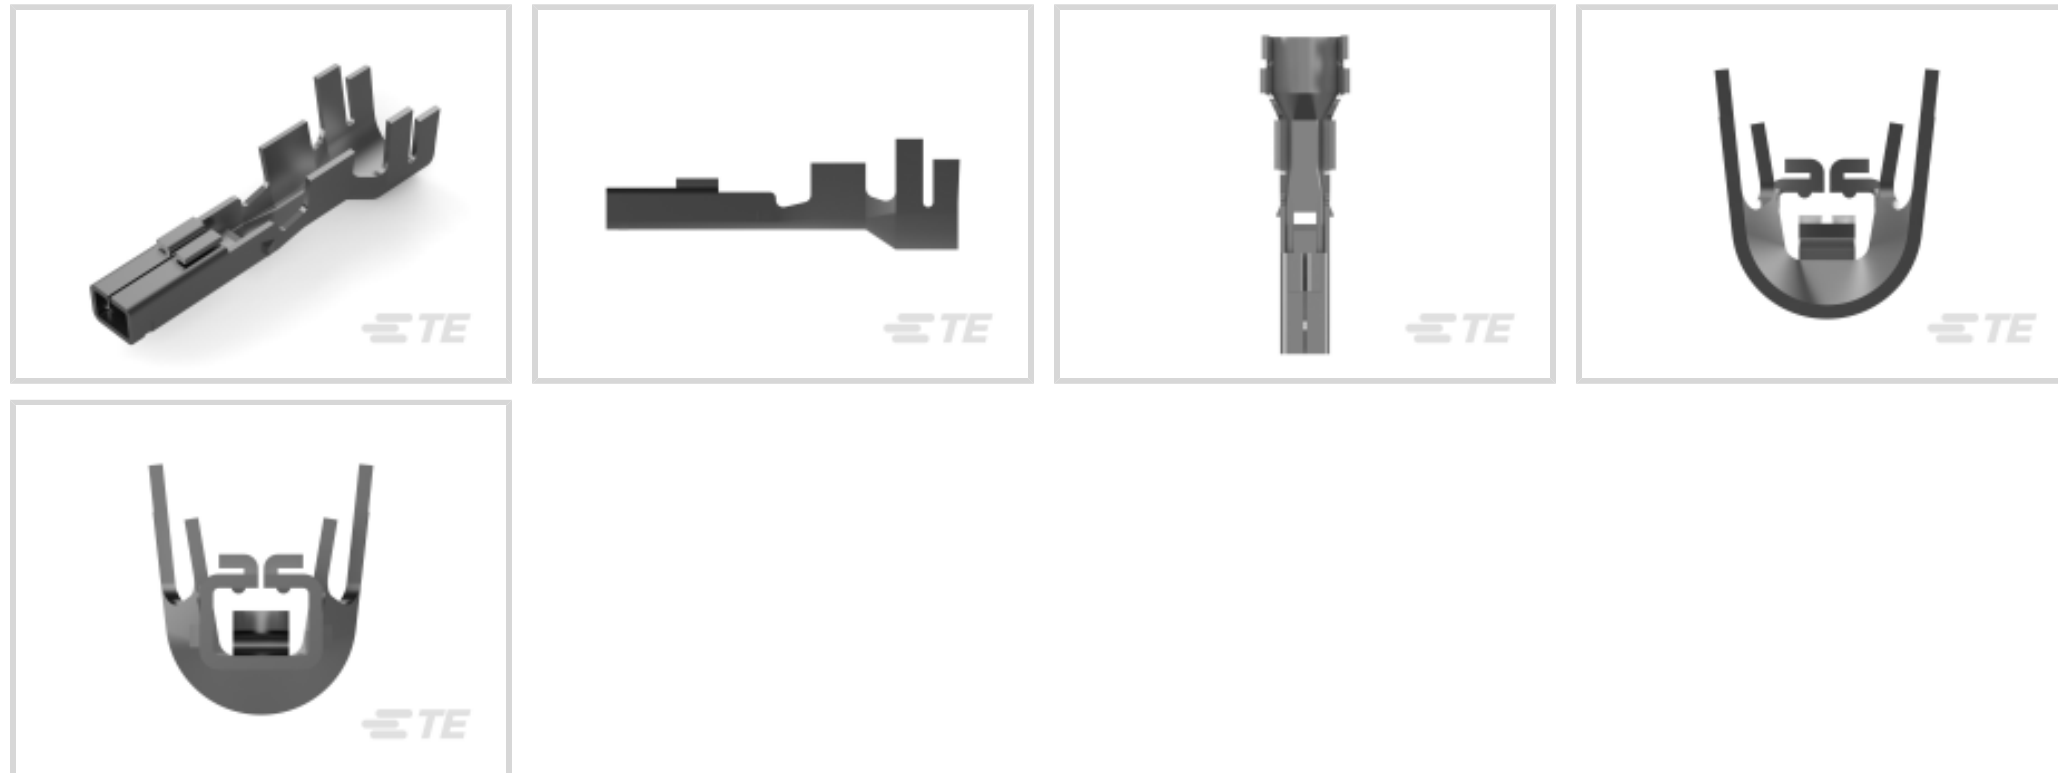

Power Contact Type: **Contact**

Operating Voltage: **50 VAC, 300 VAC**

Contact Mating Area Plating Material: **Tin**

Wire Size: **.52 – 1.38 mm²**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Operating Voltage	50 VAC, 300 VAC
-------------------	-----------------

Contact Features

Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	14 A
Contact Type	Receptacle
Contact Retention Within Housing	With
Mating Tab Width	1.5 mm[.06 in]
Mating Tab Thickness	.5 mm[.02 in]
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.8 μm[31.49 μin]
Wire Contact Termination Area Plating Thickness	.8 μm[31.49 μin]



Wire Contact Termination Area Plating Material	Pre-Tin
--	---------

Contact Orientation	Straight
---------------------	----------

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
---------------------------------------	---------------

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	.52 – 1.38 mm ²
-----------	----------------------------

Compatible Insulation Diameter Range	1.8 – 3.1 mm [.071 – .12 in]
--------------------------------------	------------------------------

Usage Conditions

Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	1000
--------------------	------

Packaging Method	Bag
------------------	-----

Other

Power Connectors Comment	Maximum insulation diameter is 2.8mm (.110) when Double Lock Plate is used.
--------------------------	---

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-P87024-P729
STD Temp Power Double Lock Plug



TE Part # 917354-1
AMP POWER D/LOCK PLUG HDR 12P



TE Part # 234912-1
EXT TOOL FOR POWER DBL LOK REC



TE Part # 91569-1
CCII POWER DBL LOCK L REC TAB 20-16 ASSY


Also in the Series | Power Double Lock



Connector Contacts(1)



Insertion & Extraction Tools(2)

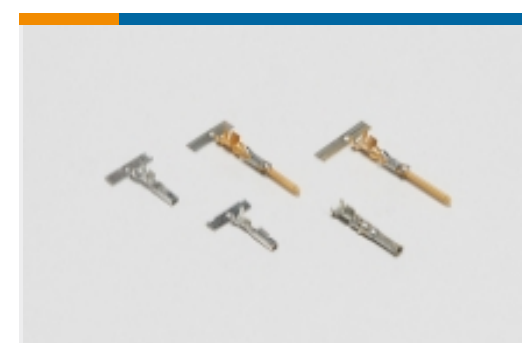

Power Contacts(23)



Rectangular Connector Locking(14)



Rectangular Power Connectors(284)

Customers Also Bought



TE Part #177903-1
POWER DBL LOCK PLUG HSG 9P



TE Part #3-2176057-3
RLP73K 3A R22 1% 1K RL



TE Part #176976-1
AMP UNIVERSAL POWER PLG 3C PCB




TE Part #86492-6
MOD IV RECP PLTD 30 SEL



TE Part #4-1393252-2
W67-X2Q110-15=M6/M7/M9/W6/W7



TE Part #2355177-3
3P,2MM,BRK HDR,SRVT,2.8,0.38AU,TB

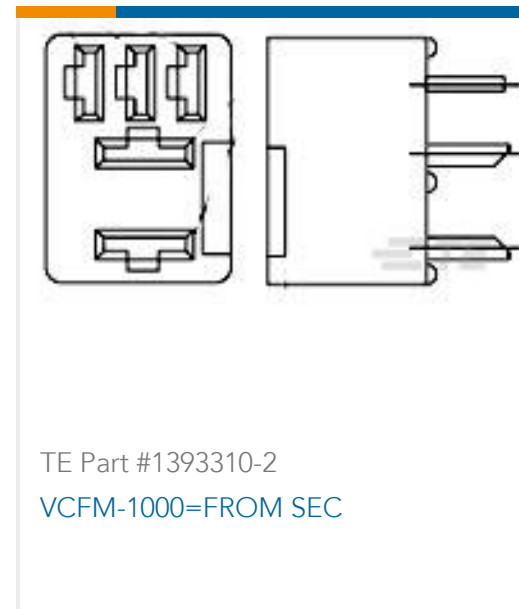

TE Part #1393310-2
VCFM-1000=FROM SEC



TE Part #1217113-2
187 PL MKIII REC. 22-18AWG TPBR



TE Part #2-1571999-9
ADP08STR04=PIANO DIP SWITCH

Documents

Product Drawings

[AMP POWER D/LOCK RECCONT. L/P](#)

English

CAD Files

[3D PDF](#)

English

[Customer View Model](#)

[ENG_CVM_179593-1_C.3d_igs.zip](#)

English

[Customer View Model](#)

[ENG_CVM_179593-1_C.3d_stp.zip](#)

English

[Customer View Model](#)

[ENG_CVM_179593-1_C.2d_dxf.zip](#)

English

[3D PDF](#)

3D



Customer View Model

[ENG_CVM_CVM_179593-1_O.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_179593-1_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_179593-1_O.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

[1773458-5_POWER_DBL_LOCK_\(PDL\)_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

Japanese

Agency Approvals

[UL Report](#)

English