179970-1 - ACTIVE

Positive Lock | Positive Lock 250

TE Internal #: 179970-1 Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Natural, Nylon, Mating Alignment, Positive Lock 250

View on TE.com >

Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: Receptacle

Connector & Housing Type: Receptacle

Number of Positions: 1

Terminal Orientation: Straight

UL Flammability Rating: UL 94V-0

Features

TE connectivity

Product Type Features

Sealable	No	
Connector System	Wire-to-Board, Wire-to-Wire	
Connector & Contact Terminates To	Wire & Cable	
Connector & Housing Type	Receptacle	
Configuration Features		
Number of Positions	1	
Body Features		
Primary Product Color	Natural	
Contact Features		
Terminal Type	Receptacle	
Terminal Orientation	Straight	
Contact Mating Retention	Without	
Mechanical Attachment		

C For support call+1 800 522 6752

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Natural, Nylon, Mating Alignment, Positive Lock 250



Mating Alignment Type	Polarization			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Housing Material	Nylon			
Usage Conditions				
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]			
Industry Standards				
UL Flammability Rating	UL 94V-0			
Packaging Features				
Packaging Quantity	400			
Product Compliance				

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Natural, Nylon, Mating Alignment, Positive Lock 250



Compatible Parts



TE Part # 179975-1 250 PL EX REC. 15-10AWG PTBR



TE Part # 179973-1 250 PL EX REC. 22-18AWG PTBR



TE Part # 179974-1 250 PL EX REC. 18-14AWG PTBR



TE Part # 179973-6 PL EX 250 REC 22-18 PTPCOPPER-ALLOY




TE Part # 179974-6 250 PL EX REC. 18-14AWG PTBR



Also in the Series | Positive Lock 250



Automotive Terminals(1)	Crimp Terminal Housings(193)	Insertion & Extraction Tools(3)	Insulation Boots & Sleeves(4)
-------------------------	------------------------------	---------------------------------	-------------------------------

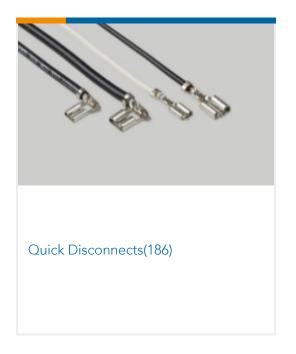

Customers Also Bought

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Natural, Nylon, Mating Alignment, Positive Lock 250





Documents

Product Drawings 250 HSG. PL EX REC.

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_179970-1_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_179970-1_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_179970-1_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

Japanese

250 Series, Positive Lock EX-II Connector

Japanese

Product Environmental Compliance

Product Compliance Document

English

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Natural, Nylon, Mating Alignment, Positive Lock 250



Product Compliance Document

English

Agency Approvals

CSA Certificate

English

CSA Certificate

English