

Positive Lock | Positive Lock 250

TE Internal #: 179970-6


Crimp Terminal Housings, Receptacle, Receptacle, 1 Position,

Straight, UL 94V-0, Blue, Nylon, Mating Alignment, Positive Lock 250

View on TE.com >



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

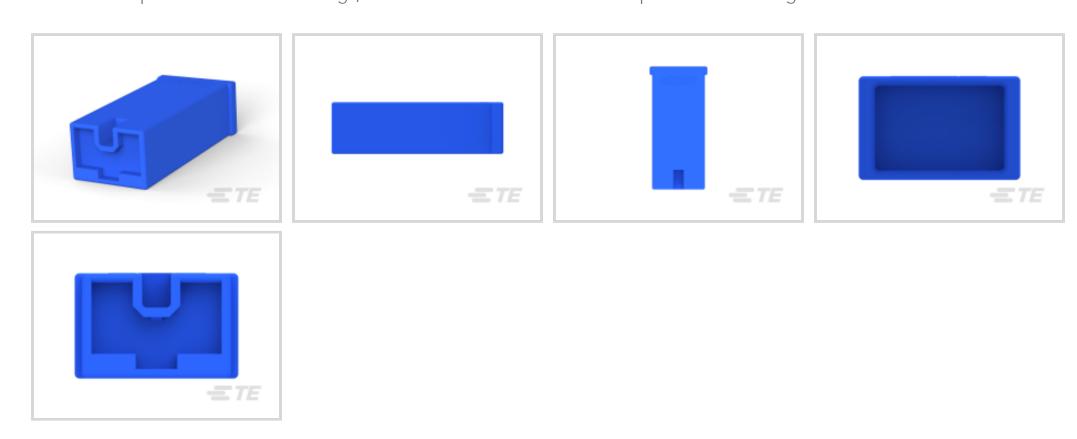

Terminal Type: Receptacle

Connector & Housing Type: Receptacle

Number of Positions: 1

Terminal Orientation: Straight
UL Flammability Rating: UL 94V-0

Features

Product Type Features

Sealable	No
Connector System	Wire-to-Board, Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Receptacle
Configuration Features	
Number of Positions	1
Body Features	
Primary Product Color	Blue
Contact Features	
Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	Without
Mechanical Attachment	

Polarization

Mating Alignment Type



Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Nylon
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	400

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts
















Also in the Series | Positive Lock 250

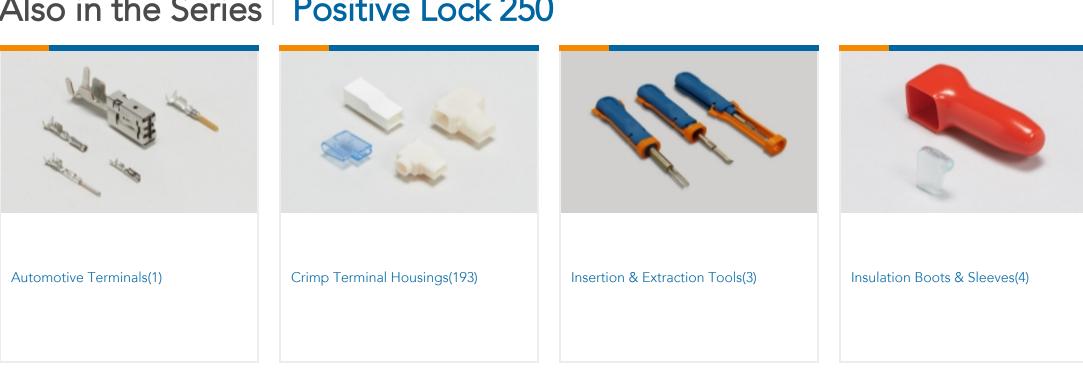



Customers Also Bought






TE Part #170224-2 250 FASTON,REC.,16-10 AWG,BR



TE Part #179975-1 250 PL EX REC. 15-10AWG PTBR




TE Part #179973-1 250 PL EX REC. 22-18AWG PTBR





TE Part #170213-2 250 FASTON,REC.,18-14 AWG,TPBR



TE Part #179974-1 250 PL EX REC. 18-14AWG PTBR



TE Part #170328-1 250 PL MKII REC. 18-14AWG PTBR



TE Part #41802 250 FASTON FLAG REC 18-12 AWG TPBR



Documents

Product Drawings

PL EXII 250 REC HSG 1P NYLON BLUE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_179970-6_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_179970-6_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_179970-6_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Crimp Terminal Housings, Receptacle, Receptacle, 1 Position, Straight, UL 94V-0, Blue, Nylon, Mating Alignment, Positive Lock 250



Product Specification

Japanese

250 Series, Positive Lock EX-II Connector

Japanese

Product Environmental Compliance

MD_179970-6_07132016258_dmtec

English

MD_179970-6_07132016258_dmtec

English

Agency Approvals

UL Report

English