



TE Internal #: 1838275-3

Standard Circular Connectors, Wire-to-Wire, 5 Position, Sealable, Wire & Cable, Signal, Reverse Gender, A Polarization Code, PA, Hermetically Sealed

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors



Connector System: **Wire-to-Wire**

Number of Positions: **5**

Sealable: **Yes**

Connector & Contact Terminates To: **Wire & Cable**

Contact Current Rating (Max): **5 A**

## Features

### Product Type Features

|                                   |                      |
|-----------------------------------|----------------------|
| Assembly Requirement              | Factory Assembled    |
| Prewired                          | No                   |
| Assembly Type                     | Electrical Connector |
| Circular Connector Shell Type     | All Plastic          |
| Connector Product Type            | Connector Assembly   |
| Connector System                  | Wire-to-Wire         |
| Sealable                          | Yes                  |
| Connector & Contact Terminates To | Wire & Cable         |
| Circular Connector Type           | Plug                 |
| Shell Type                        | Plastic              |

### Configuration Features

|                             |         |
|-----------------------------|---------|
| Factory Installed Backshell | Without |
| Number of Positions         | 5       |
| Number of Power Positions   | 0       |
| Number of Signal Positions  | 3       |



|                    |     |
|--------------------|-----|
| Contacts Preloaded | Yes |
|--------------------|-----|

### Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 500 VAC |
|-------------------|---------|

### Body Features

|                               |        |
|-------------------------------|--------|
| Environmental Protection Type | Sealed |
|-------------------------------|--------|

|                          |      |
|--------------------------|------|
| Environmental Protection | With |
|--------------------------|------|

|   |    |
|---|----|
| Circular Connector Insulation Material Type | PA |
|---|----|

|                     |     |
|---------------------|-----|
| Hermetically Sealed | Yes |
|---------------------|-----|

### Contact Features

|                              |     |
|------------------------------|-----|
| Contact Current Rating (Max) | 5 A |
|------------------------------|-----|

|                |     |
|----------------|-----|
| Reverse Gender | Yes |
|----------------|-----|

|                                 |     |
|---------------------------------|-----|
| Circular Connector Contact Type | Pin |
|---------------------------------|-----|

### Mechanical Attachment

|                   |   |
|-------------------|---|
| Polarization Code | A |
|-------------------|---|

|                       |       |
|-----------------------|-------|
| Mating Alignment Type | 1 Key |
|-----------------------|-------|

|                  |      |
|------------------|------|
| Mating Retention | With |
|------------------|------|

### Housing Features

|                               |    |
|-------------------------------|----|
| Circular Connector Shell Size | 15 |
|-------------------------------|----|

### Dimensions

|           |                          |
|-----------|--------------------------|
| Wire Size | .34 – .5 mm <sup>2</sup> |
|-----------|--------------------------|

### Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |
|-----------------------------|---------------------------|

### Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

|          |    |
|----------|----|
| Shielded | No |
|----------|----|

### Packaging Features

|                    |    |
|--------------------|----|
| Packaging Quantity | 50 |
|--------------------|----|

### Other

|                   |     |
|-------------------|-----|
| Field Serviceable | Yes |
|-------------------|-----|

## Product Compliance



[For compliance documentation, visit the product page on TE.com>](#)

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Compliant with Exemptions  |
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | <p>Current ECHA Candidate List: JUNE 2023 (235)<br/>                 Candidate List Declared Against: JAN 2023 (233)<br/>                 SVHC &gt; Threshold:<br/>                 Pb (3.31% in Component Part)</p> <p><b>Article Safe Usage Statements:</b><br/>                 Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p> |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.   |
| Solder Process Capability                     | Hand solderable with lead free solder  |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



### Customers Also Bought

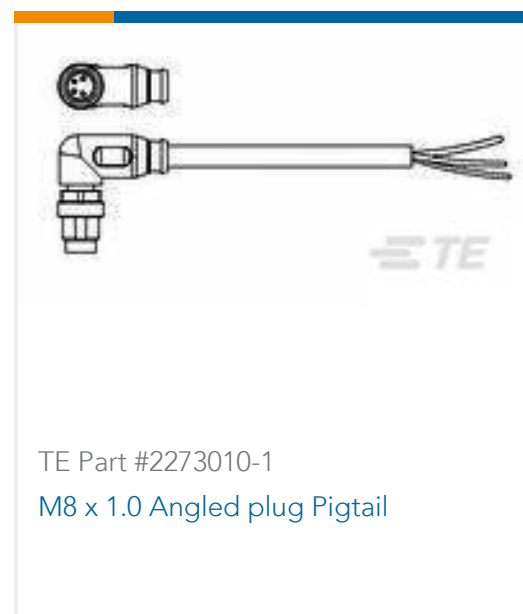

## Documents

### Product Drawings

[M12 Fld Ser CONN. Male Pin Sldr](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1838275-3\\_B.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1838275-3\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1838275-3\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[M8 / M12 Connector System Catalog](#)

English

[M8 / M12 Connector System Catalog](#)

Japanese

### Product Specifications

[Product Specification](#)

English

1838275-3

Standard Circular Connectors, Wire-to-Wire, 5 Position, Sealable, Wire & Cable,  
Signal, Reverse Gender, A Polarization Code, PA, Hermetically Sealed

