


Z-PACK | Z-PACK 2mm HM

TE Internal #: 188834-1 Hard Metric Backplane Connectors, PCB Mount Header, ≤1 Gb/s, 25 Column, 7 Row, Mezzanine, 154 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

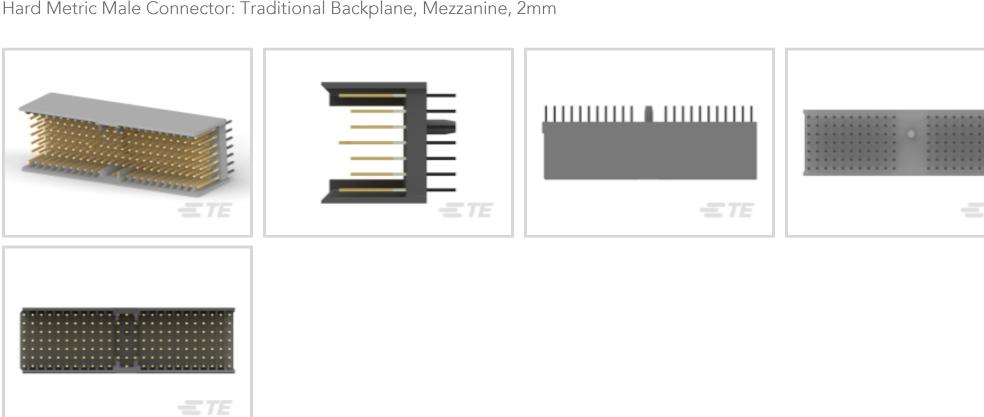

Hard Metric Male Connector: Traditional Backplane, Mezzanine, 2mm

PCB Connector Assembly Type: PCB Mount Header

Data Rate: **≤1 Gb/s**

Number of Columns: 25

Number of Rows: 7

Backplane Architecture: Mezzanine

All Hard Metric Male Connector: Traditional Backplane, Mezzanine, 2mm (124)



Features

Product Type Features

Ground Feature Type	Ground Return Shielding	
Backplane Interface Type	2mm HM	
PCB Connector Assembly Type	PCB Mount Header	
Connector System	Board-to-Board	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Configuration Features Rows Loaded	A, B, C, D, E, F, Z	
	A, B, C, D, E, F, Z 110	
Rows Loaded		
Rows Loaded Number of Signal Positions	110	

Hard Metric Backplane Connectors, PCB Mount Header, ≤1 Gb/s, 25 Column, 7 Row, Mezzanine, 154 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Number of Positions	154	
PCB Mount Orientation	Vertical	
Signal Characteristics		
Crosstalk Version	Standard	
Data Rate	≤1 Gb/s	
Body Features		
Primary Product Color	Gray	
Contact Features		
Contact Mating Area Length	13.45 mm	
Feedthrough Post Length	3.7 mm	
CompactPCI Designation	P1/P4	
Contact Type	Pin	
Contact Underplating Material	Nickel	
PCB Contact Termination Area Plating Material	Tin-Lead	
Contact Base Material	Phosphor Bronze	
Contact Mating Area Plating Material	Gold	
Contact Mating Area Plating Material Thickness	.38 μm[15 μin]	
Contact Current Rating (Max)	1.5 A	
Mechanical Attachment		
Front Mating Level	Level 1	
Mating Alignment Type	Multi-Purpose Center	
Connector Mounting Type	Board Mount	
Housing Features		
Housing Material	Polyester - GF	
Centerline (Pitch)	2 mm[.078 in]	
Dimensions		
Backplane Module Length	50 mm	
Usage Conditions		
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Shielded	Yes	
Circuit Application	Power & Signal	

C For support call+1 800 522 6752

Hard Metric Backplane Connectors, PCB Mount Header, ≤1 Gb/s, 25 Column, 7 Row, Mezzanine, 154 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Industry Standards

UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	10
Packaging Method	Tube
Other	
Backplane Connector Comment	Row Configuration 5+2
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

Restricted Materials Above Threshold

Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold:

Pb (13% in Component Part)

Compliant with Exemptions

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Hard Metric Backplane Connectors, PCB Mount Header, ≤1 Gb/s, 25 Column, 7 Row, Mezzanine, 154 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM






Also in the Series Z-PACK 2mm HM



Connector Caps & Covers(62)	Hard Metric Backplane Connectors	High Speed Backplane Connectors(1)
	(269)	
	Connector Caps & Covers(62)	

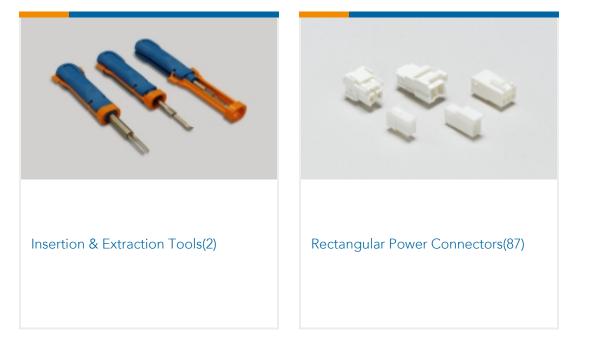

Customers Also Bought



Hard Metric Backplane Connectors, PCB Mount Header, ≤1 Gb/s, 25 Column, 7 Row, Mezzanine, 154 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM





Documents

CAD Files

Customer View Model ENG_CVM_CVM_188834-1_F.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_188834-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_188834-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

English

Product Environmental Compliance **TE Material Declaration**

English