


#### Buchanan

TE Internal #: 1986722-8 PCB Terminal Blocks, Plug, Wire-to-Board, 8 Position, .15 in [3.81 mm] Centerline, 1 Row, 180° Wire Entry Angle, 30 – 14 AWG Wire Size

#### View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

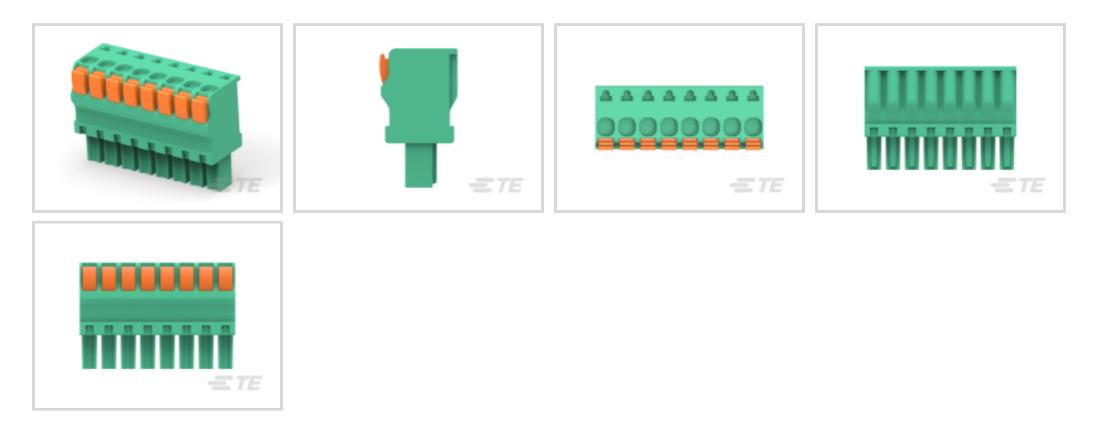

Terminal Block Connector Type: Plug Connector System: Wire-to-Board Number of Positions: 8

Centerline (Pitch): 3.81 mm [.15 in]

Number of Rows: 1

#### Features

**E T E Connectivity** 

#### Product Type Features

Wire Protection	With
Terminal Block Connector Type	Plug
Connector System	Wire-to-Board
Configuration Features	
Wire Entry Location	Тор
Stacking Configuration	Side Stackable
Number of Positions	8
Number of Rows	1
Wire Entry Angle	180°
Electrical Characteristics	
Operating Voltage	300 VAC
Body Features	
Lever Color	Orange
Primary Product Color	Green

#### 1986722-8

PCB Terminal Blocks, Plug, Wire-to-Board, 8 Position, .15 in [3.81 mm] Centerline, 1 Row, 180° Wire Entry Angle, 30 – 14 AWG Wire Size



Product Orientation	Vertical
Contact Features	
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	11 A
Termination Features	
Termination Method to Wire & Cable	Push-in, Spring Terminal
Housing Features	
Housing Material	PA 66
Centerline (Pitch)	3.81 mm[.15 in]
Dimensions	
Wire Size	.05 – 2 mm²
Usage Conditions	
Operating Temperature Range	-40 - 65 °C[-40 - 149 °F]
Operation/Application	
Circuit Application	Power & Signal

### Packaging Features

#### 100

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### 1986722-8

PCB Terminal Blocks, Plug, Wire-to-Board, 8 Position, .15 in [3.81 mm] Centerline, 1 Row, 180° Wire Entry Angle, 30 – 14 AWG Wire Size




#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




# Customers Also Bought

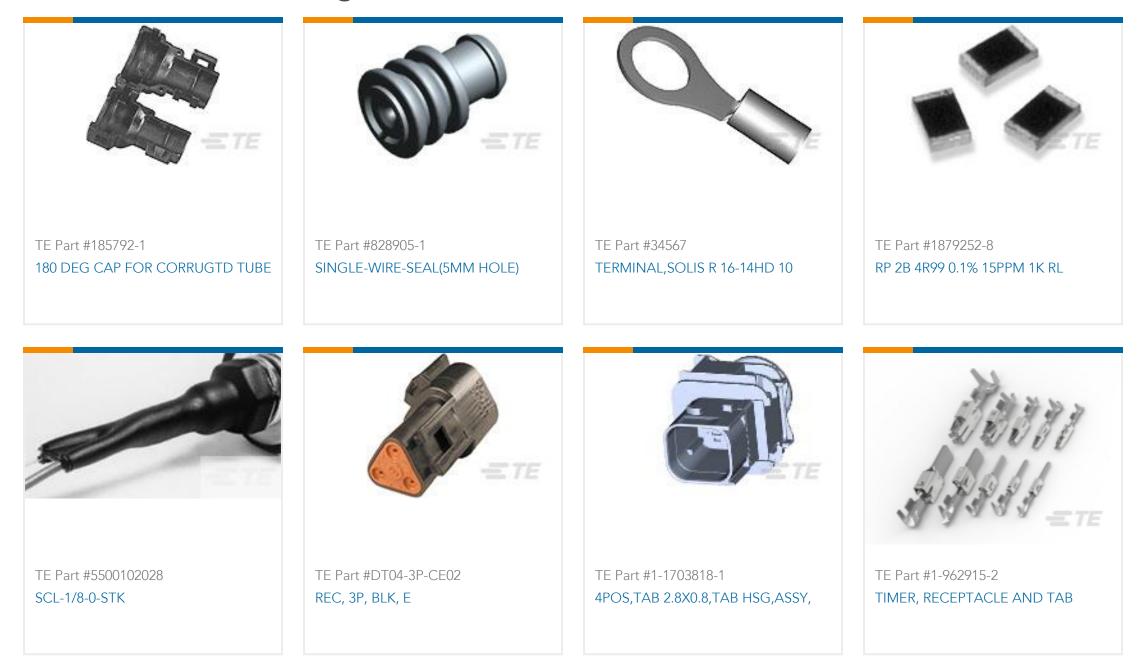

#### 1986722-8

PCB Terminal Blocks, Plug, Wire-to-Board, 8 Position, .15 in [3.81 mm] Centerline, 1 Row, 180° Wire Entry Angle, 30 – 14 AWG Wire Size





### Documents

### Product Drawings STR PLUG SPRING TYPE LH 8P, 3.81mm

English

**CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1986722-8\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1986722-8\_A.3d\_igs.zip

English

Customer View Model

#### ENG\_CVM\_CVM\_1986722-8\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 2-1773464-1\_Spring\_Type\_Straight\_Plugs

English

Agency Approvals

UL

English