1SNK156241R0000 - ACTIVE

ENTRELEC

TE Internal #: 1SNK156241R0000 Terminal Block & Strip Marking Accessories, Marker Card, X (x100) Mark Details, White, Horizontal, -55 – 110 °C [-67 – 230 °F], UL 94V-2 View on TE.com >



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Marking Accessories



Marking Product Type: Marker Card

Pre-Printed Mark Details: X (x100)

Primary Product Color: White

Product Orientation: Horizontal

Operating Temperature Range: -55 – 110 °C [-67 – 230 °F]

Features

Product Type Features

Marking Product Type

Configuration Features

Number of Cards per Package

Marker Card

1

Number of Digits per Marker - Horizontal	3
Number of Digits per Marker - Vertical	8
Pre-Printed Mark Details	X (x100)
Body Features	
Product Weight	11 g[.388 oz]
Primary Product Material	Polyamide
Primary Product Color	White
Product Orientation	Horizontal
Dimensions	
Product Depth	5.6 mm
Product Width	6 mm[.236 in]
Product Length	5.6 mm[.22 in]
Product Height	12 mm[.472 in]
Usage Conditions	
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

1SNK156241R0000

Terminal Block & Strip Marking Accessories, Marker Card, X (x100) Mark Details, White, Horizontal, -55 – 110 °C [-67 – 230 °F], UL 94V-2



Industry Standards	
UL Flammability Rating	UL 94V-2
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PV Free
Solder Process Capability	Not reviewed for solder process capabilit

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Customers Also Bought

1SNK156241R0000

Terminal Block & Strip Marking Accessories, Marker Card, X (x100) Mark Details, White, Horizontal, -55 – 110 °C [-67 – 230 °F], UL 94V-2



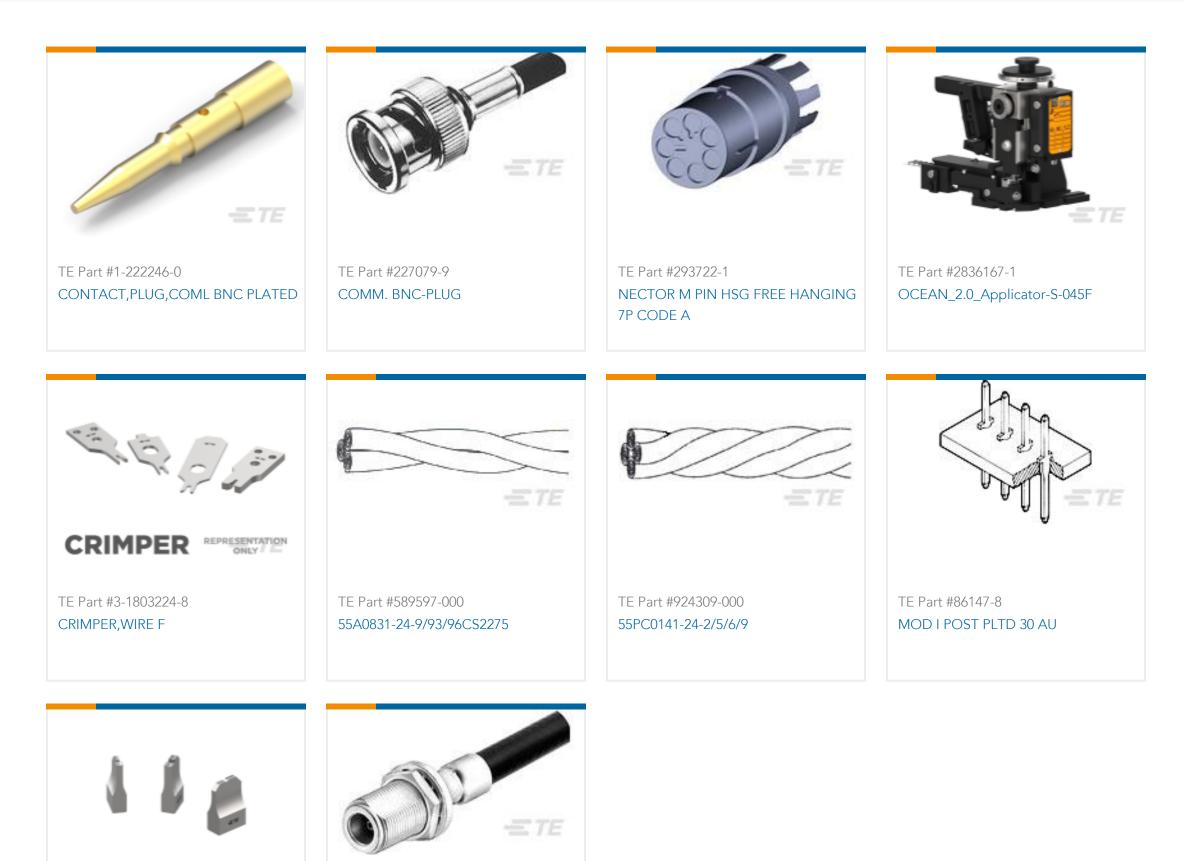

ANVIL

REPRESENTATION ONLY

TE Part #9-1633933-2 ANVIL, COMBINATION TE Part #225094-1 N SER BHD JACK WEATHERPROOF

Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1SNK156241R0000_A.2d_dxf.zip English Customer View Model

ENG_CVM_CVM_1SNK156241R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK156241R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

1SNK156241R0000

Terminal Block & Strip Marking Accessories, Marker Card, X (x100) Mark Details, White, Horizontal, -55 – 110 °C [-67 – 230 °F], UL 94V-2



MC612PA X (x100) Horizontal

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)