1SNK505150R0000 - ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK505150R0000 Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Ground

Modular Terminal Block Product Type: Screw Clamp Terminal Block

Primary Product Color: Green & Yellow

Product Spacing: 5.2 mm [.205 in]

Number of Positions: 2

Features

Product Type Features

Modular Terminal Block Product Type

Screw Clamp Terminal Block

Configuration Features

Gauge Type	A3-B3
Number of Levels	1
Number of Circuits	1
Block Function	Ground
Number of Positions	2
Electrical Characteristics	
Impulse Withstanding Voltage Rating (IEC)	8000 ∨
Dielectric Withstanding Voltage (Max)	2200 V
Short-Time Withstanding Current Rating @ 1s	480 A
Body Features	
Product Weight	12.1 g[.476 oz]
Primary Product Color	Green & Yellow
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK



Housing Features

Housing Material	Polyamide
Dimensions	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 – 12 AWG
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	24 – 12 AWG
Wire Stripping Length	10.5 mm[.413 in]
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	24 – 14 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.22 – 4 mm ²
Tool Size	3.5 mm[.138 in]
Product Depth	47.4 mm
Product Length	47.4 mm[1.87 in]
Product Height	59.5 mm
Product Spacing	5.2 mm[.205 in]
Usage Conditions	
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

2

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

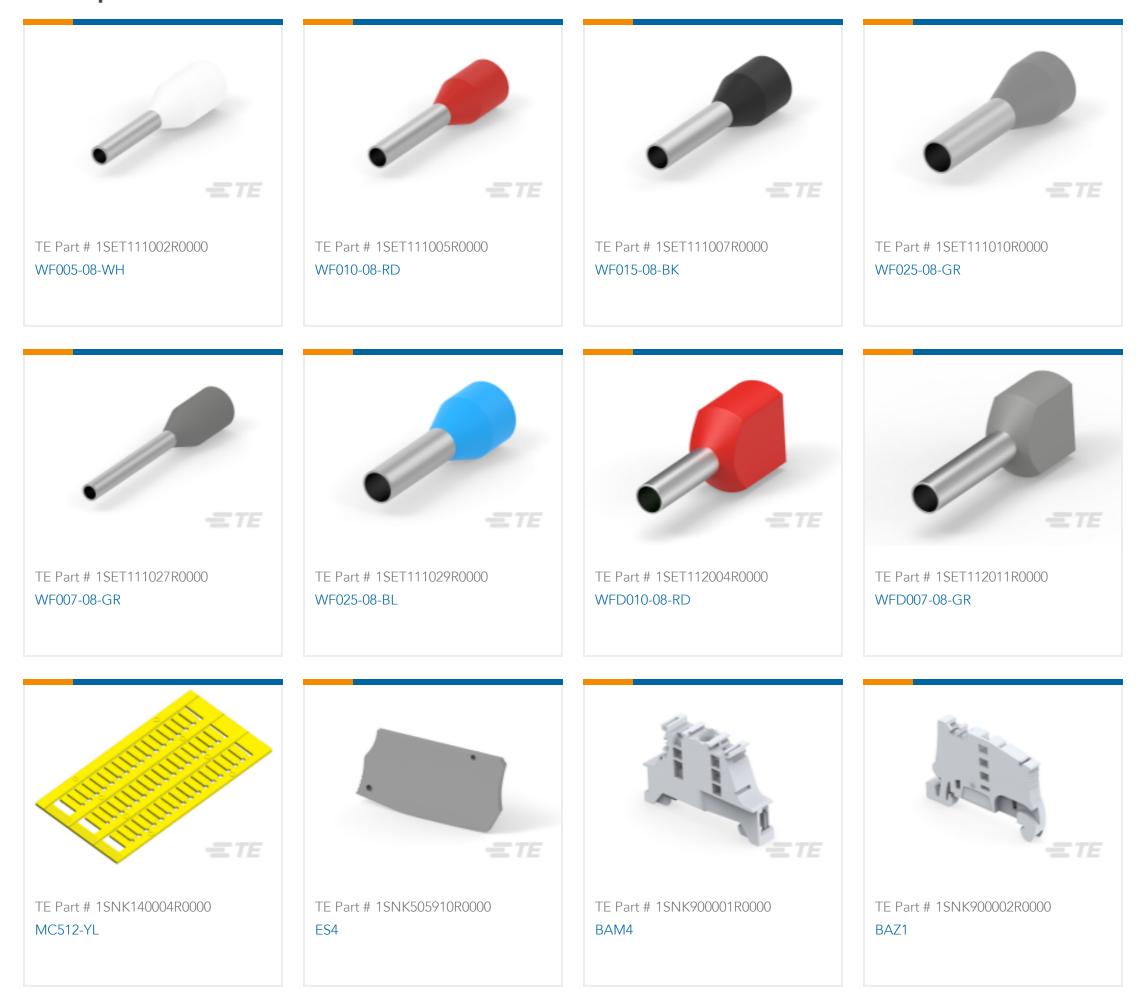

Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK





Also in the Series ENTRELEC SNK






Terminal Block & Strip Conducting



Accessories(67)

Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought

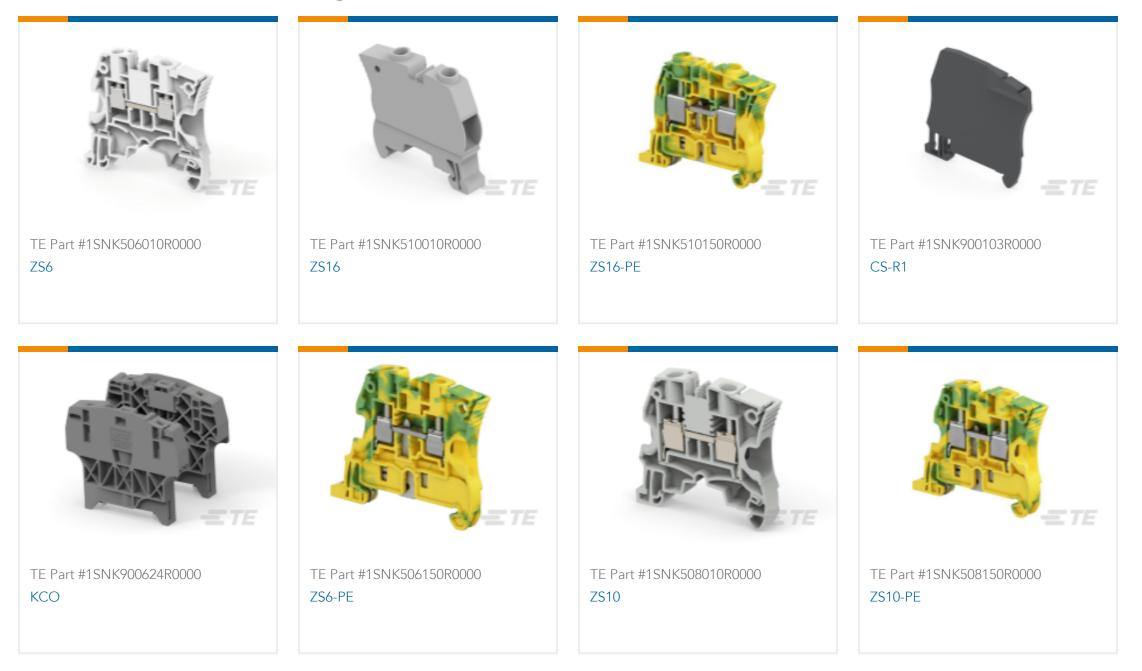

Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK





Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK505150R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK505150R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK505150R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

ZS4-PE

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals ZK-ZS_ATEX_1SND225112U1006-C-TE English

Modular Terminal Blocks, Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .205 in [5.2 mm], 2 Position, DIN Rail, ENTRELEC SNK

