## 1SNK710151R0000 - ACTIVE

### ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK710151R0000 Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .394 in [10 mm], 3 Position, DIN Rail, ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Ground Modular Terminal Block Product Type: PI-Spring Terminal Block Primary Product Color: Green & Yellow Product Spacing: 10 mm [.394 in ] Number of Positions: 3

## Features

## Product Type Features

Modular Terminal Block Product Type

PI-Spring Terminal Block

### **Configuration Features**

Gauge Type	A6 & 5.1 mm Dia.
Number of Levels	1
Number of Circuits	1
Block Function	Ground
Number of Positions	3
Electrical Characteristics	
Impulse Withstanding Voltage Rating (IEC)	8000 V
Short-Time Withstanding Current Rating @ 1s	1200 A
Body Features	
Product Weight	43.334 g[1.705 oz]
Primary Product Color	Green & Yellow
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail
Housing Features	

**C** For support call+1 800 522 6752

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .394 in [10 mm], 3 Position, DIN Rail, ENTRELEC SNK



Housing Material	Polyamide
Dimensions	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.5 – 16 mm²
Main Circuit Capacity - Twin Ferrule per Spring Clamp	.5 – 4 mm²
Wire Stripping Length	15 mm[.591 in]
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.5 – 10 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	20 – 8 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 – 10 mm²
Tool Size	4 mm[.157 in]
Product Depth	47.5 mm
Product Length	96.3 mm[3.79 in]
Product Height	99.1 mm
Product Spacing	10 mm[.394 in]
Isage Conditions	
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

### **Industry Standards**

### **2**

IP Rating	IP20
UL Flammability Rating	UL 94V-0

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .394 in [10 mm], 3 Position, DIN Rail, ENTRELEC SNK



### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

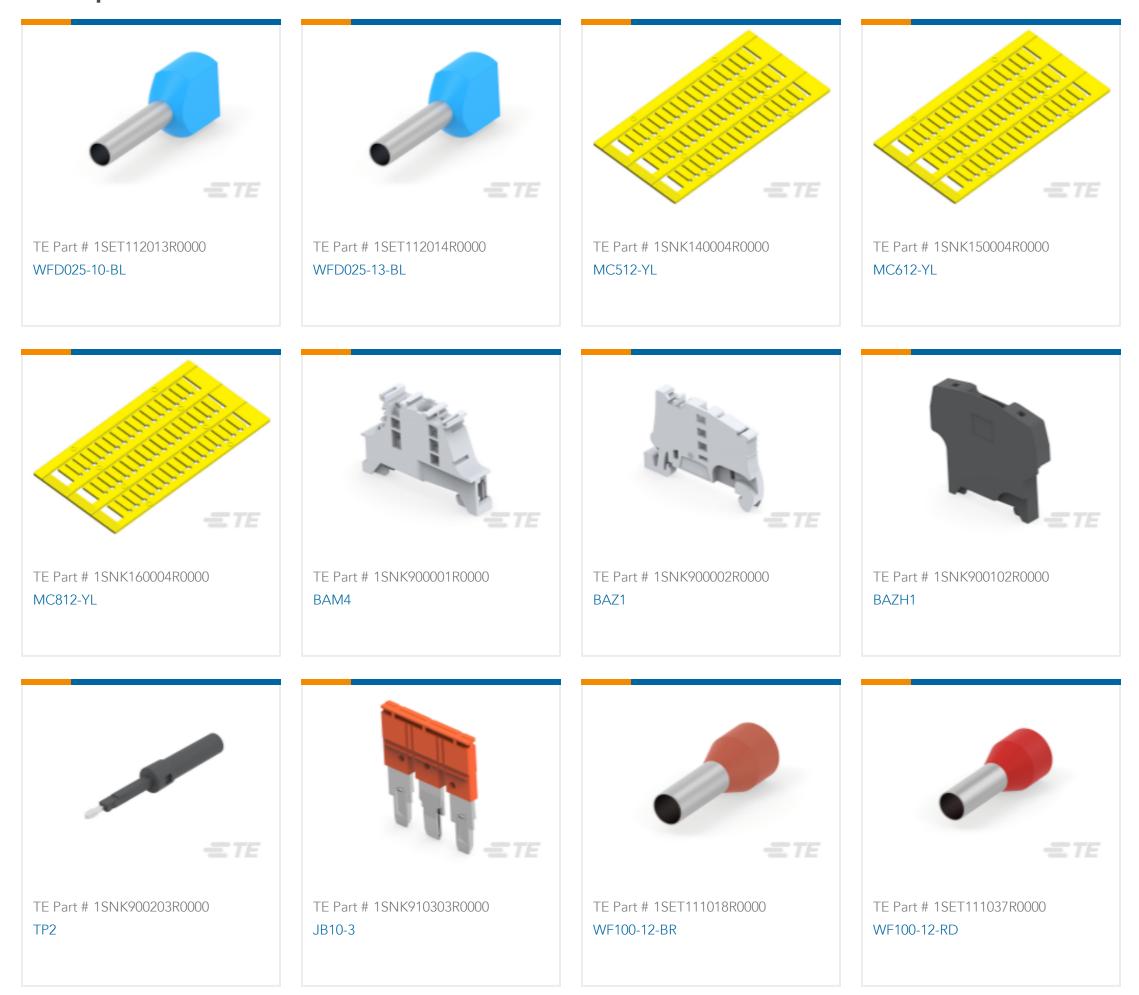

Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .394 in [10 mm], 3 Position, DIN Rail, ENTRELEC SNK



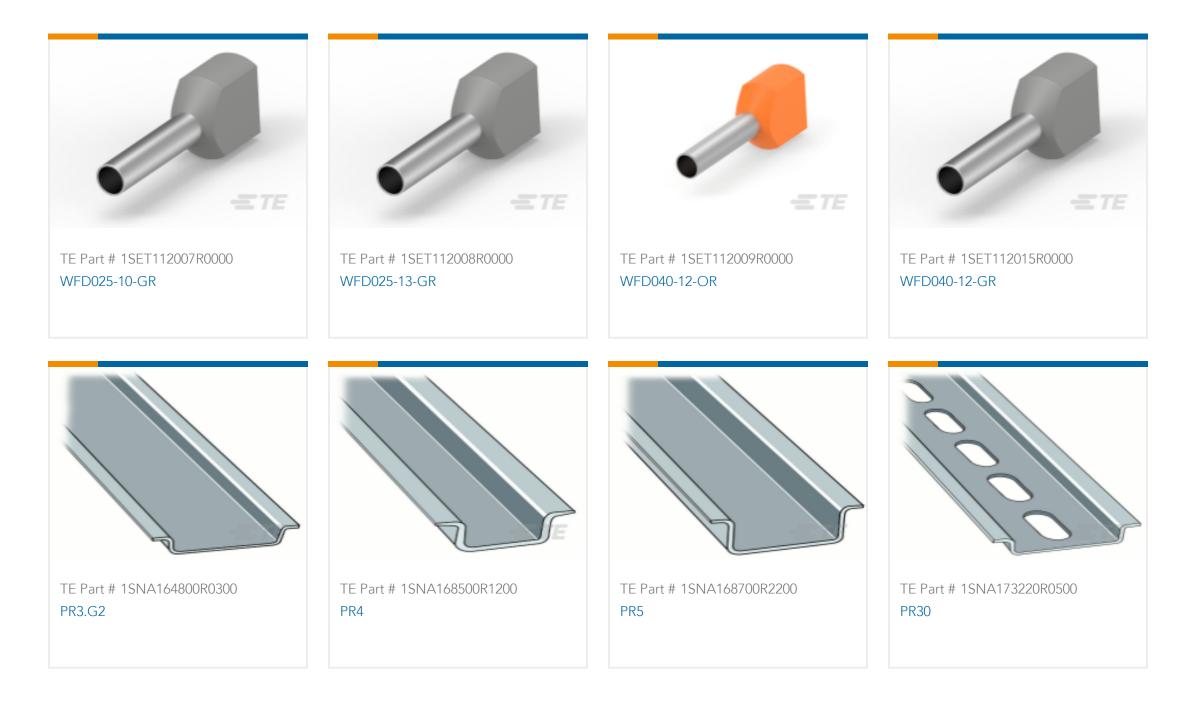

# Also in the Series ENTRELEC SNK





Terminal Block & Strip Conducting



Terminal Block & Strip Insulating

Accessories(67)

Accessories(31)

## Customers Also Bought



Modular Terminal Blocks, Ground, PI-Spring Terminal Block, Green & Yellow, Product Spacing .394 in [10 mm], 3 Position, DIN Rail, ENTRELEC SNK





## Documents

## **CAD** Files

## 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK710151R0000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK710151R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK710151R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages **ENTRELEC Terminal Block - Master Catalog** 

**ENTRELEC Terminal Block - Master Catalog** 

English

ZK10-PE-3P

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Agency Approvals BV\_MARINE\_34077\_B3

English