1SNK805212R0000 - ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK805212R0000 Modular Terminal Blocks, Feed-Through & Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .204 in [5.2 mm], 4 Position, ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Feed-Through & Ground

Modular Terminal Block Product Type: Screw Clamp Terminal Block

Primary Product Color: Green & Yellow

Product Spacing: 5.2 mm [.204 in]

Number of Positions: 4

Features

Product Type Features

Modular Terminal Block Product Type

Screw Clamp Terminal Block

Configuration Features

Gauge Type	A2 / 2.3 mm Dia.	
Number of Levels	2	
Number of Poles	4	
Number of Circuits	2	
Block Function	Feed-Through & Ground	
Number of Positions	4	
Electrical Characteristics		
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V	
Impulse Withstanding Voltage Rating (IEC)	8000 V	
Voltage Rating (CSA)	600 V	
Current Rating (CSA)	20 A	
Dielectric Withstanding Voltage (Max)	2200 V	
Short-Time Withstanding Current Rating @ 1s	300 A	
Voltage Rating (IEC)	800 V	
Current Rating (UL)	20 A	

C For support call+1 800 522 6752

Modular Terminal Blocks, Feed-Through & Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .204 in [5.2 mm], 4 Position, ENTRELEC SNK



ndustry Standards		
Circuit Application	Signal	
Operation/Application		
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]	
Installation Temperature Range	-5-40 °C[23-104 °F]	
Jsage Conditions		
Wire Size	2.5 mm ²	
Product Spacing	5.2 mm[.204 in]	
Product Height	88.5 mm	
Product Length	54.6 mm[2.13 in]	
Product Width	5.2 mm[.204 in]	
Product Depth	54.6 mm[2.13 in]	
Tool Size	3.5 mm[.138 in]	
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm²	
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG	
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	.22 – 2.5 mm ²	
Wire Stripping Length	11 mm[.433 in]	
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 – 4 mm²	
Dimensions		
Housing Material	Polyamide 6.6	
Housing Features		
Connector Mounting Type	DIN Rail	
DIN Rail Mounting Type	TH35-15, TH35-7.5	
Mechanical Attachment		
Termination Method to Wire & Cable	Push-in	
Termination Features		
Primary Product Color	Green & Yellow	
Product Weight	16.13 g[.568 oz]	
Body Features		
Operating Voltage	800 VAC	

C For support call+1 800 522 6752

09/20/2023 06:11PM | Page 2

Modular Terminal Blocks, Feed-Through & Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .204 in [5.2 mm], 4 Position, ENTRELEC SNK



	000	
IP Rating	IP20	
UL Flammability Rating	UL 94V-0	
Product Compliance		
For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Modular Terminal Blocks, Feed-Through & Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .204 in [5.2 mm], 4 Position, ENTRELEC SNK



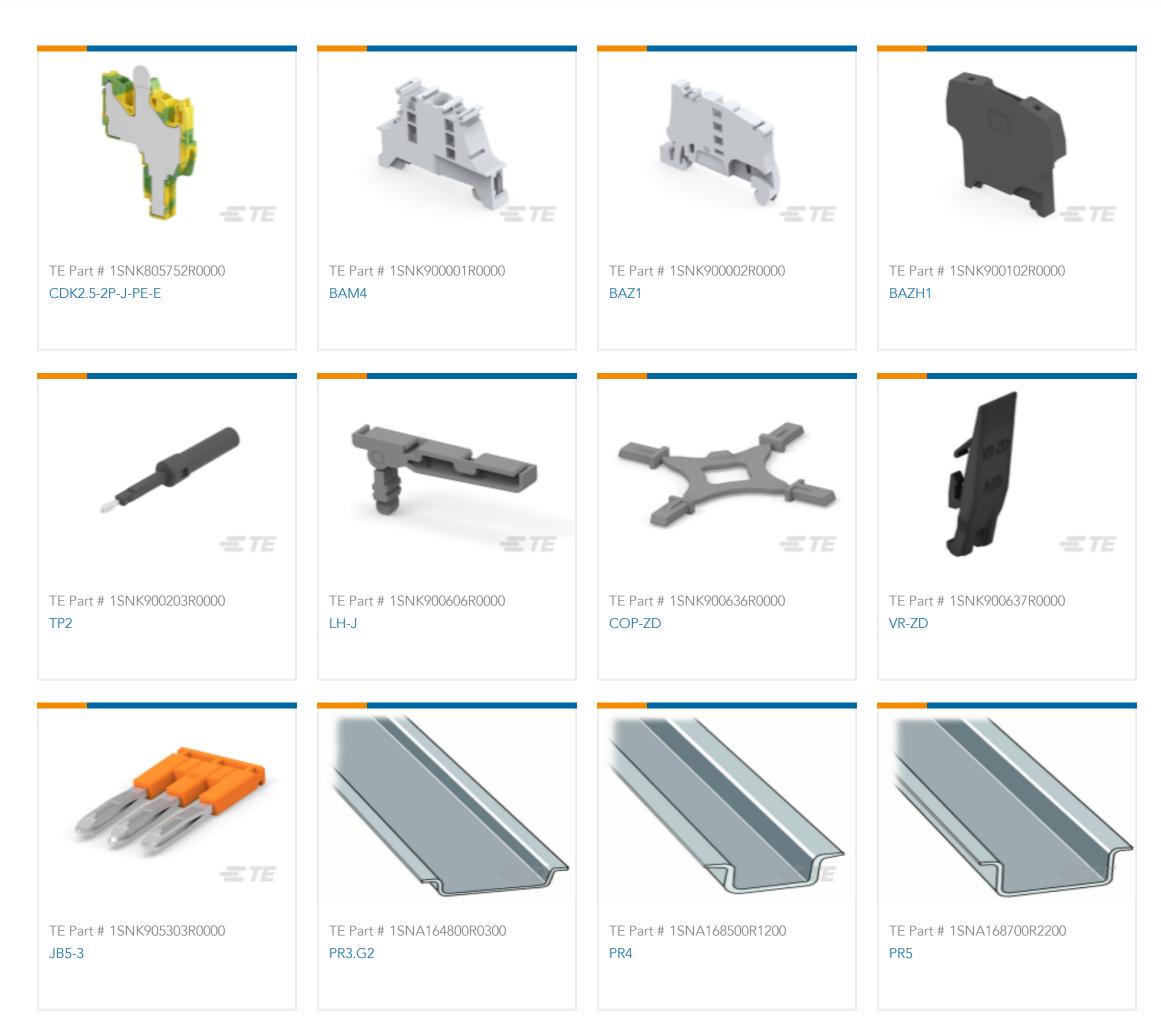

2000			
TE Part # 1SNA173220R0500	TE Part # 1SNA174300R1700	TE Part # 1SNA178529R0400	TE Part # 1SNK140000R0000
PR30	PR3.Z2	PR50	MC512


Also in the Series | ENTRELEC SNK

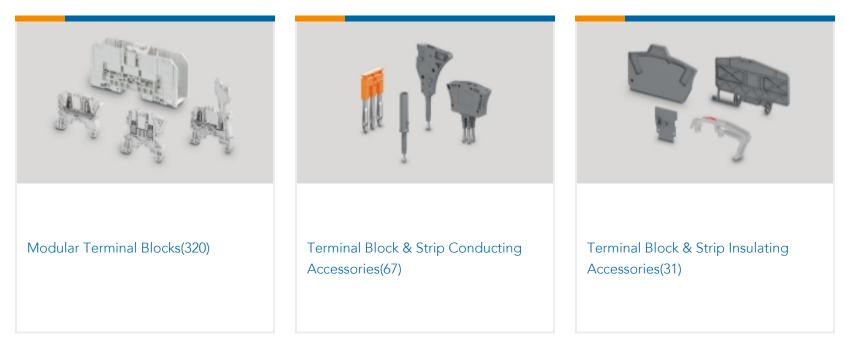

Customers Also Bought

Modular Terminal Blocks, Feed-Through & Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .204 in [5.2 mm], 4 Position, ENTRELEC SNK



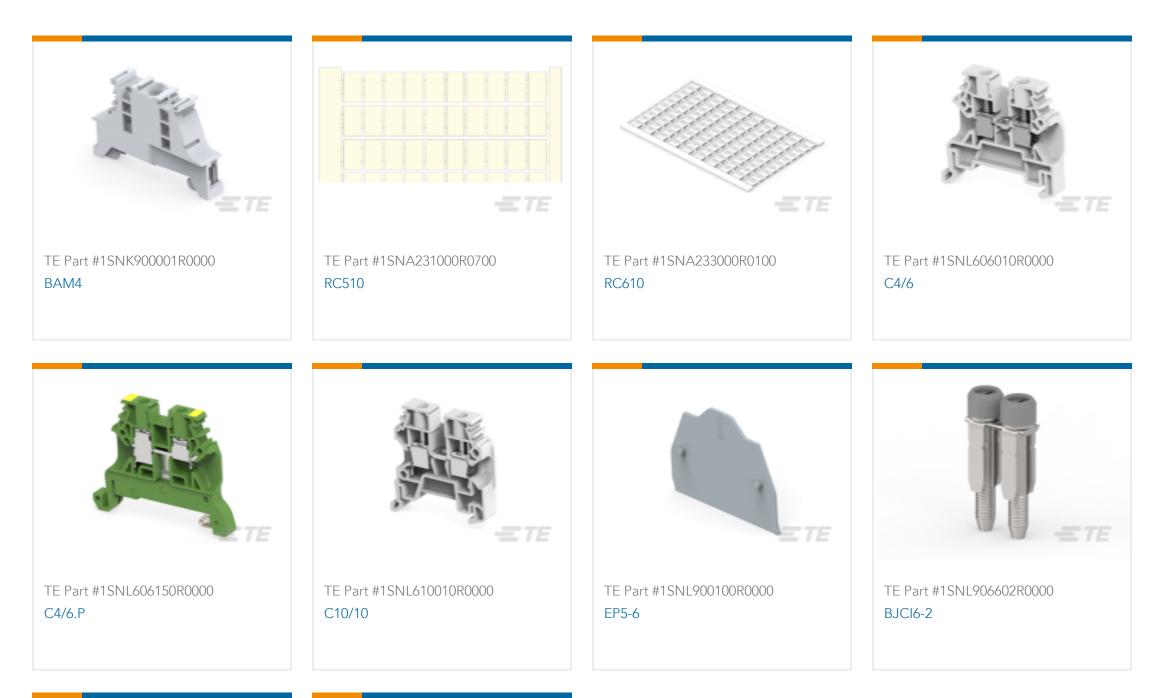



TE Part #1SNL906603R0000 BJCI6-3



TE Part #1SNL906605R0000 BJCI6-5

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_1SNK805212R0000_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK805212R0000_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_1SNK805212R0000_A1.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

Modular Terminal Blocks, Feed-Through & Ground, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .204 in [5.2 mm], 4 Position, ENTRELEC SNK



SNK SERIES TERMINAL BLOCKS

English

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals BV_MARINE_34077_B3

English