1SNK805726R0000 - ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK805726R0000 Modular Terminal Blocks, Female Plug, Gray, Product Spacing .205 in [5.2 mm], 2 Position, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK View on TE.com >

Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

Modular Terminal Block Product Type: Female Plug

Primary Product Color: Gray

Product Spacing: 5.2 mm [.205 in]

Number of Positions: 2

Operating Temperature Range: -55 – 110 °C [-67 – 230 °F]

Features

Product Type Features

Modular Terminal Block Product Type

Configuration Features

Gauge Type

A2 / 2.3 mm Dia.



Female Plug

Number of Poles	12			
Number of Positions	2			
Electrical Characteristics				
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V			
Impulse Withstanding Voltage Rating (IEC)	8000 V			
Current Rating (CSA)	22 A			
Power Loss	4.8 W			
Short-Time Withstanding Current Rating @ 1s	300 A			
Voltage Rating (IEC)	1000 V			
Current Rating (UL)	22 A			
Current Rating (IEC)	24 A			
Body Features				
Product Weight	33.2 g[1.323 oz]			
Primary Product Color	Gray			
Housing Features				

Modular Terminal Blocks, Female Plug, Gray, Product Spacing .205 in [5.2 mm], 2 Position, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



Housing Material	Polyamide	
Dimensions		
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	.2 – 4 mm²	
Main Circuit Capacity - Twin Ferrule per Spring Clamp	.22 – .5 mm²	
Wire Stripping Length	11 mm[.433 in]	
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	$.22 - 2.5 \text{ mm}^2$	
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG	
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm ²	
Tool Size	3.5 mm[.138 in]	
Product Depth	36.2 mm	
Product Length	18.5 mm	
Product Height	19.1 mm	
Product Spacing	5.2 mm[.205 in]	
Jsage Conditions		
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]	
ndustry Standards		

IP Rating

IP20

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

Modular Terminal Blocks, Female Plug, Gray, Product Spacing .205 in [5.2 mm], 2 Position, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



- 11-	= 12	- 11	
TE Part # 1SNK805212R0000	TE Part # 1SNK805213R0000	TE Part # 1SNK805214R0000	TE Part # 1SNK900660R0000
ZDK2.5-D2-PE	ZDK2.5-D2	ZDK2.5-D1	PT-ZD




TE Part # 1SNK805016R0000 ZD2.5-11


Also in the Series | ENTRELEC SNK

Modular Terminal Blocks, Female Plug, Gray, Product Spacing .205 in [5.2 mm], 2 Position, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



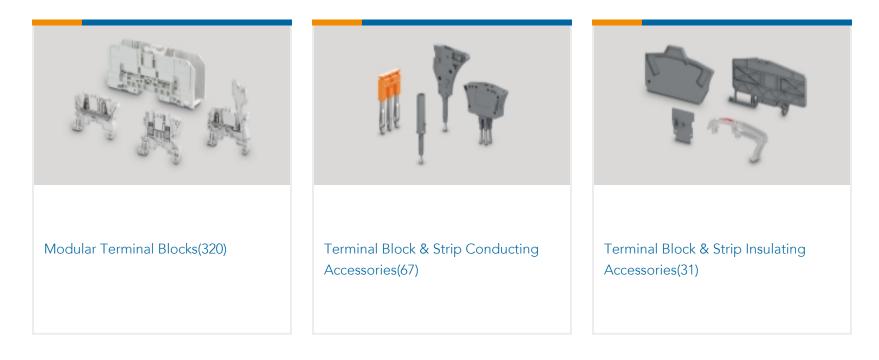

Customers Also Bought

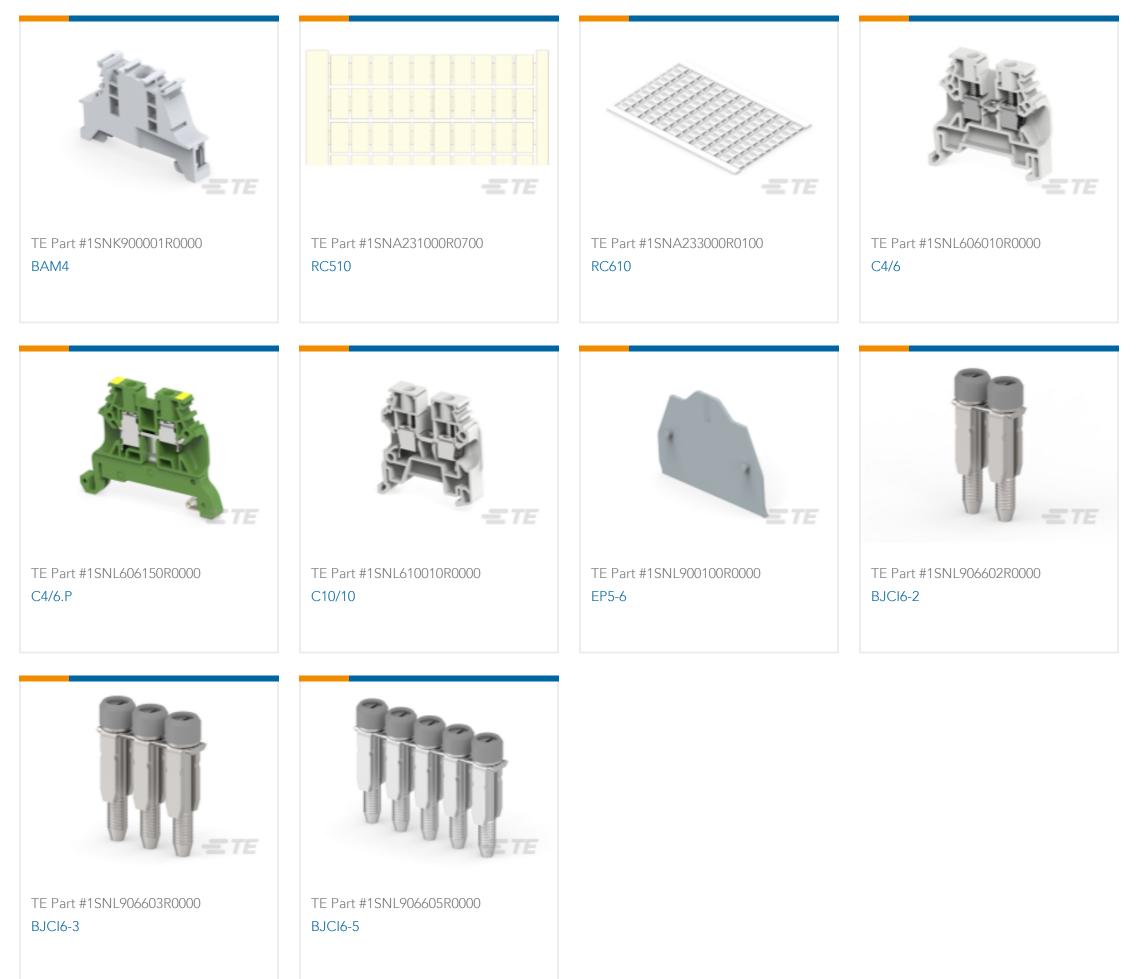

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK805726R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK805726R0000_A.3d_igs.zip

Modular Terminal Blocks, Female Plug, Gray, Product Spacing .205 in [5.2 mm], 2 Position, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



English

Customer View Model ENG_CVM_CVM_1SNK805726R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages CDK2.5-12

English

Agency Approvals BV_MARINE_34077_B3

English