1SNK908302R0000 - ACTIVE


ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK908302R0000 Terminal Block & Strip Conducting Accessories, Jumper Bar, 2 Pole, Orange, Product Spacing .315 in [8 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Conducting Accessories

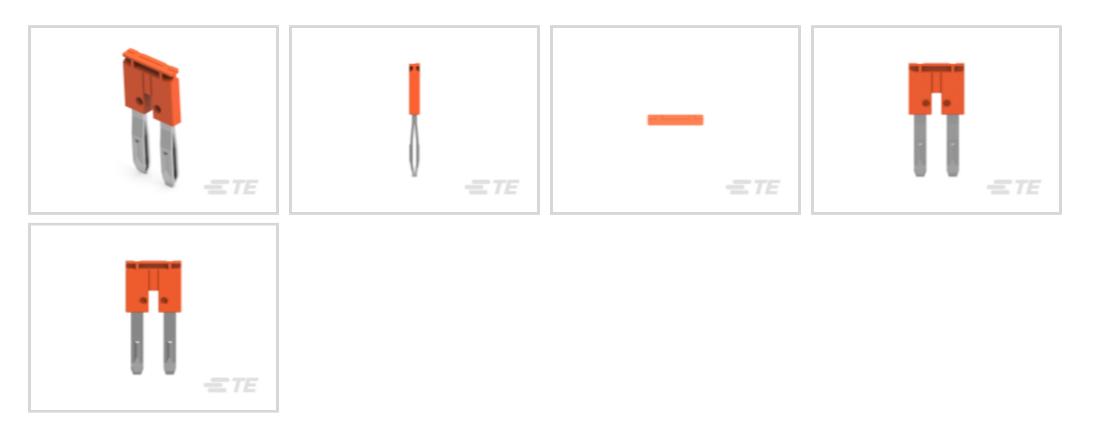

Conducting Accessory Type: Jumper Bar

Number of Poles: 2

PCB Mount Retention Type: Screwless

Primary Product Color: Orange

Product Spacing: 8 mm [.315 in]

Features

Product Type Features

Conducting Accessory Type	Jumper Bar
Configuration Features	
Number of Poles	2
Electrical Characteristics	
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	6000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	42 A
Short-Time Withstanding Current Rating @ 1s	1200 A
Power Loss	1.8 W
Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (IEC)	1000 V
Current Rating (UL)	42 A
Current Rating (IEC)	57 A

Terminal Block & Strip Conducting Accessories, Jumper Bar, 2 Pole, Orange, Product Spacing .315 in [8 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



Body Features

Plastic & Resin Material Type	Polyamide
Product Weight	2.7 g[.095 oz]
Primary Product Color	Orange
Contact Features	
Contact Current Rating (Max)	57 A
Mechanical Attachment	
PCB Mount Retention Type	Screwless
Dimensions	
Product Depth	27.8 mm[1.094 in]
Product Width	8 mm[.315 in]
Product Height	13.6 mm[.535 in]
Product Spacing	8 mm[.315 in]
Usage Conditions	
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Inductor (Standarda	

Industry Standards

IP Rating

IP20

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

Terminal Block & Strip Conducting Accessories, Jumper Bar, 2 Pole, Orange, Product Spacing .315 in [8 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

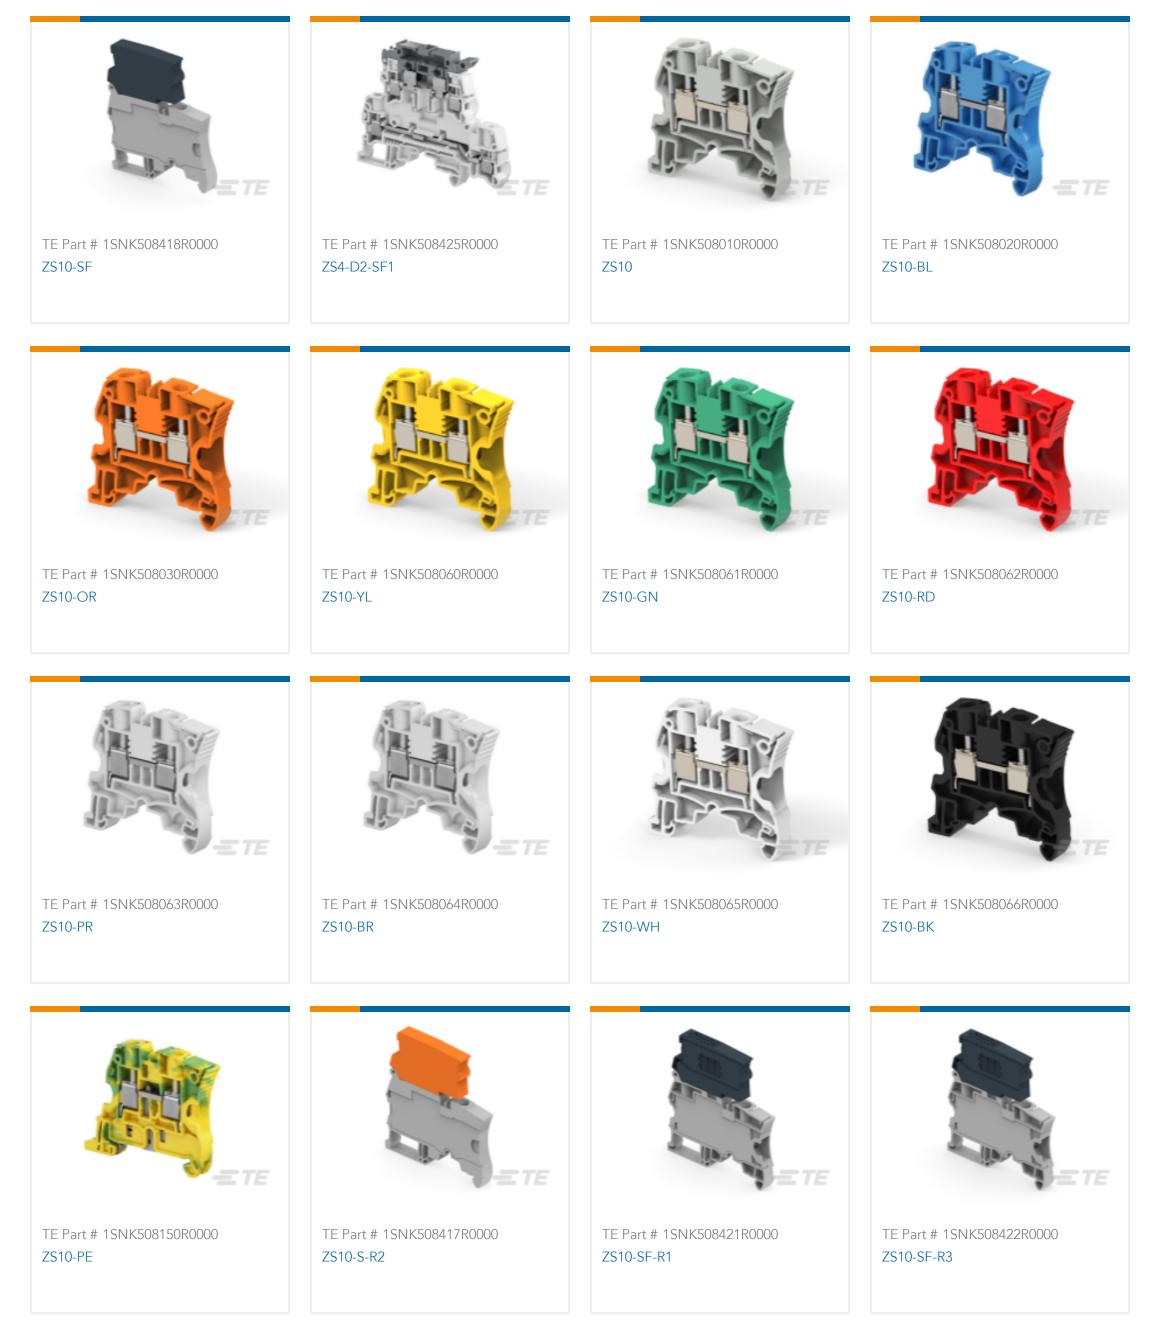


Terminal Block & Strip Conducting Accessories, Jumper Bar, 2 Pole, Orange, Product Spacing .315 in [8 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK






Also in the Series | ENTRELEC SNK

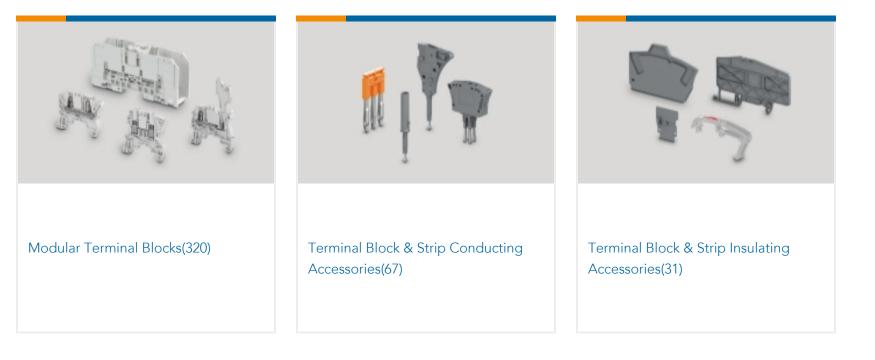

Customers Also Bought

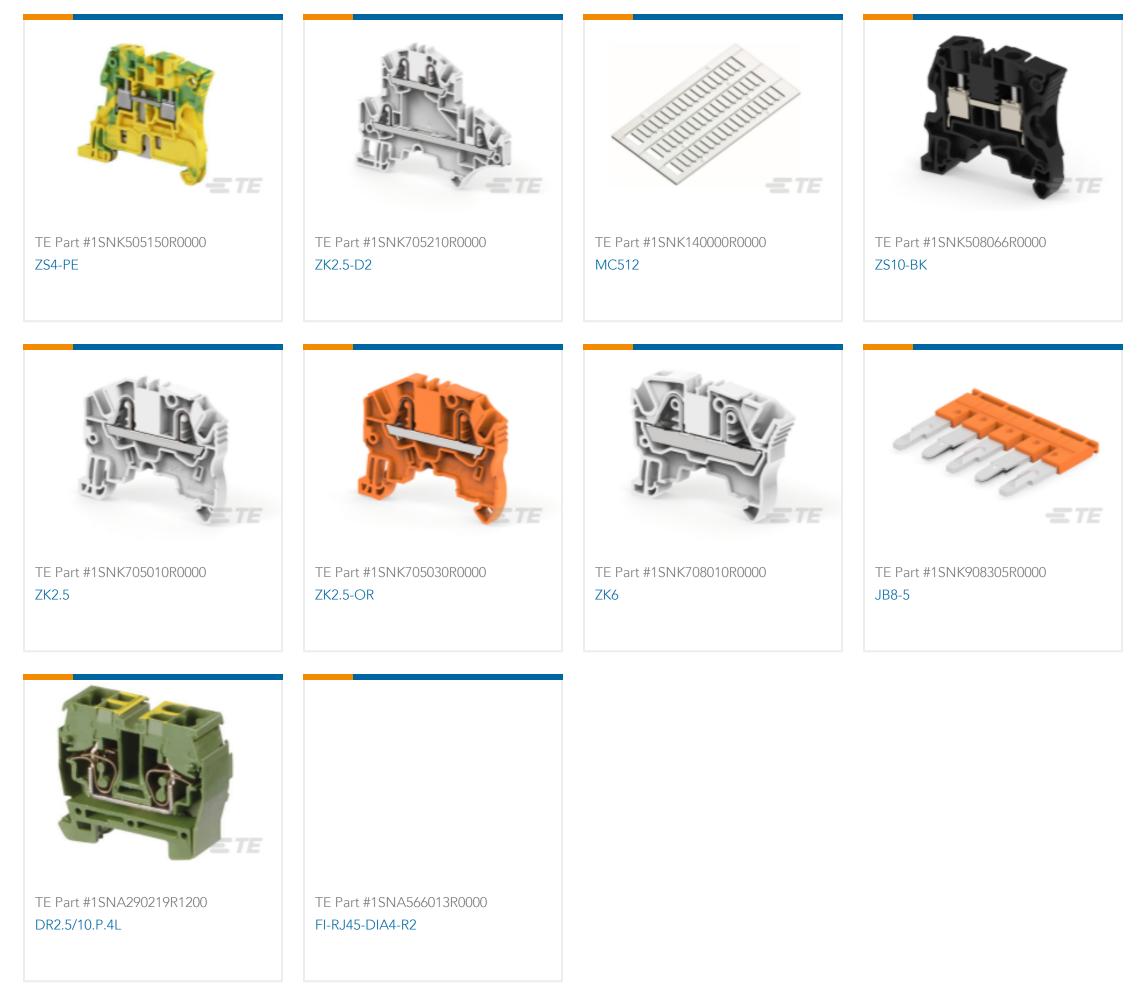

Terminal Block & Strip Conducting Accessories, Jumper Bar, 2 Pole, Orange, Product Spacing .315 in [8 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK908302R0000_C1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK908302R0000_C1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK908302R0000_C1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese