

### AMP | LEAVYSEAL

TE Internal #: 2-1418883-1 Housing for Female Terminals, Wire-to-Device / Wire-to-Board / Wire-to-Wire, 62 Position, .157 in / .197 in [4 mm / 5 mm] Centerline, LEAVYSEAL

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > LEAVYSEAL Housings



Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 62

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm, 5 mm [.157 in, .197 in]

Sealable: Yes

All LEAVYSEAL Housings (64)

### Features

### Product Type Features

Mixed & Hybrid Connector

Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	62
Number of Rows	3, 4
Electrical Characteristics	
Operating Voltage	36 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	90°
Primary Product Color	Gray

Housing for Female Terminals, Wire-to-Device / Wire-to-Board / Wire-to-Wire, 62 Position, .157 in / .197 in [4 mm / 5 mm] Centerline, LEAVYSEAL



Connector & Keying Code	В
Contact Features	
Contact Size	1.5K, 2.8mm
Contact Type	Receptacle
Mating Tab Width	1.6 mm, 2.8 mm[.063 in][.11 in]
Contact Current Rating (Max)	40 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	With
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	4 mm, 5 mm[.157 in][.197 in]
Dimensions	
Connector Height	44 mm[1.732 in]
Product Width	46 mm[1.811 in]
Product Length	120.5 mm[4.744 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67, IP69K
UL Flammability Rating	UL 94HB
Packaging Features	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Device / Wire-to-Board / Wire-to-Wire, 62 Position, .157 in / .197 in [4 mm / 5 mm] Centerline, LEAVYSEAL



Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



Housing for Female Terminals, Wire-to-Device / Wire-to-Board / Wire-to-Wire, 62 Position, .157 in / .197 in [4 mm / 5 mm] Centerline, LEAVYSEAL



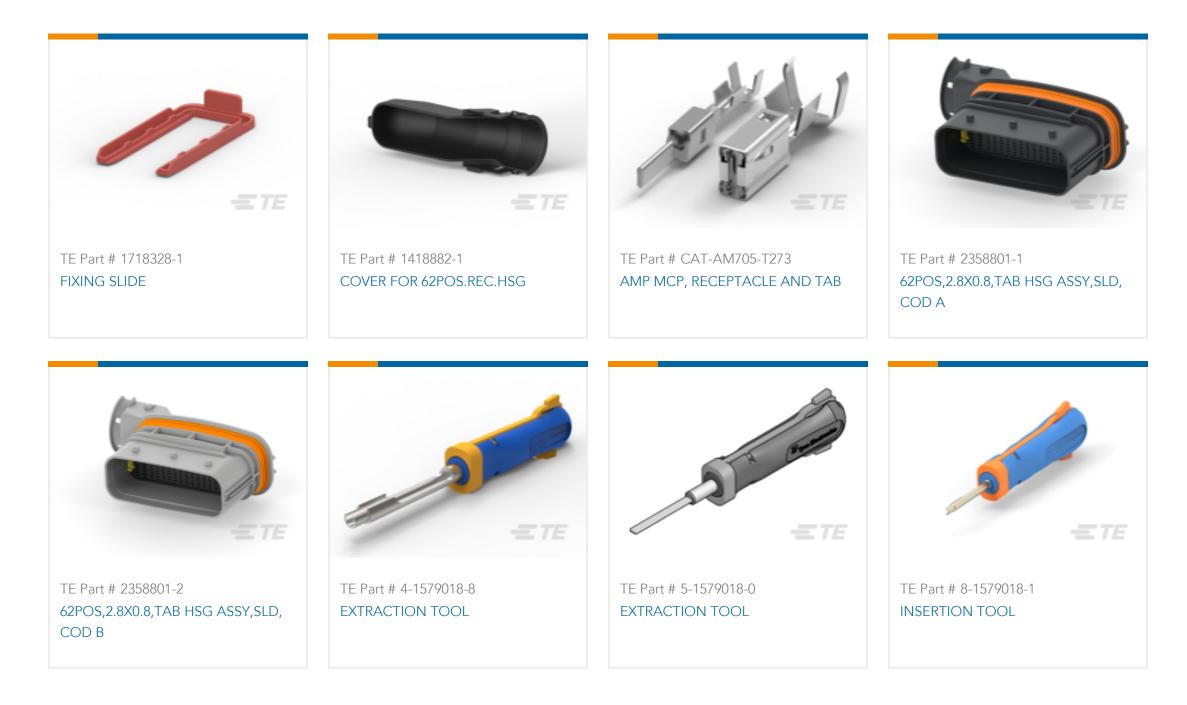


# Also in the Series LEAVYSEAL



Automotive	Connector	Caps a	COVCIS	
(17)				

Accessories(15)

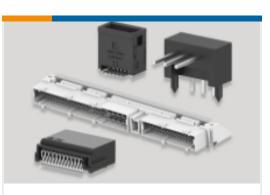

PCB Headers & Receptacles(16)

# Customers Also Bought



Housing for Female Terminals, Wire-to-Device / Wire-to-Board / Wire-to-Wire, 62 Position, .157 in / .197 in [4 mm / 5 mm] Centerline, LEAVYSEAL



TE Part #880686-2	TE Part #K1040863	TE Part #20000416-00	TE Part #2307893-3
.140 DIA SOCKET	Toggle Switch 07-2-2-10 910 (MAN)	TX D385	HORN HARNESS WITH MFL

# Documents

## Product Drawings 62.POS.MIXED REC.HSG

English

### **CAD** Files

**Customer View Model** 

ENG\_CVM\_CVM\_2-1418883-1\_C.2d\_dxf.zip

English

#### 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-1418883-1\_C.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_2-1418883-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

Product Specifications Application Specification

German