

OJ-SS-112LM,000 ✓ ACTIVE

OEG | OEG Miniature PCB Relay OJ/OJE


TE Internal #: 2-1419129-1

Power Relays, Standard, Monostable, DC, 200 mW Coil Power Rating DC, 720 Ω Coil Resistance, OEG Miniature PCB Relay OJ/OJE

[View on TE.com >](#)



Relays, Contactors & Switches > Relays > Power Relays > STD OEG Miniature PCB OJ/OJE Pow Relays

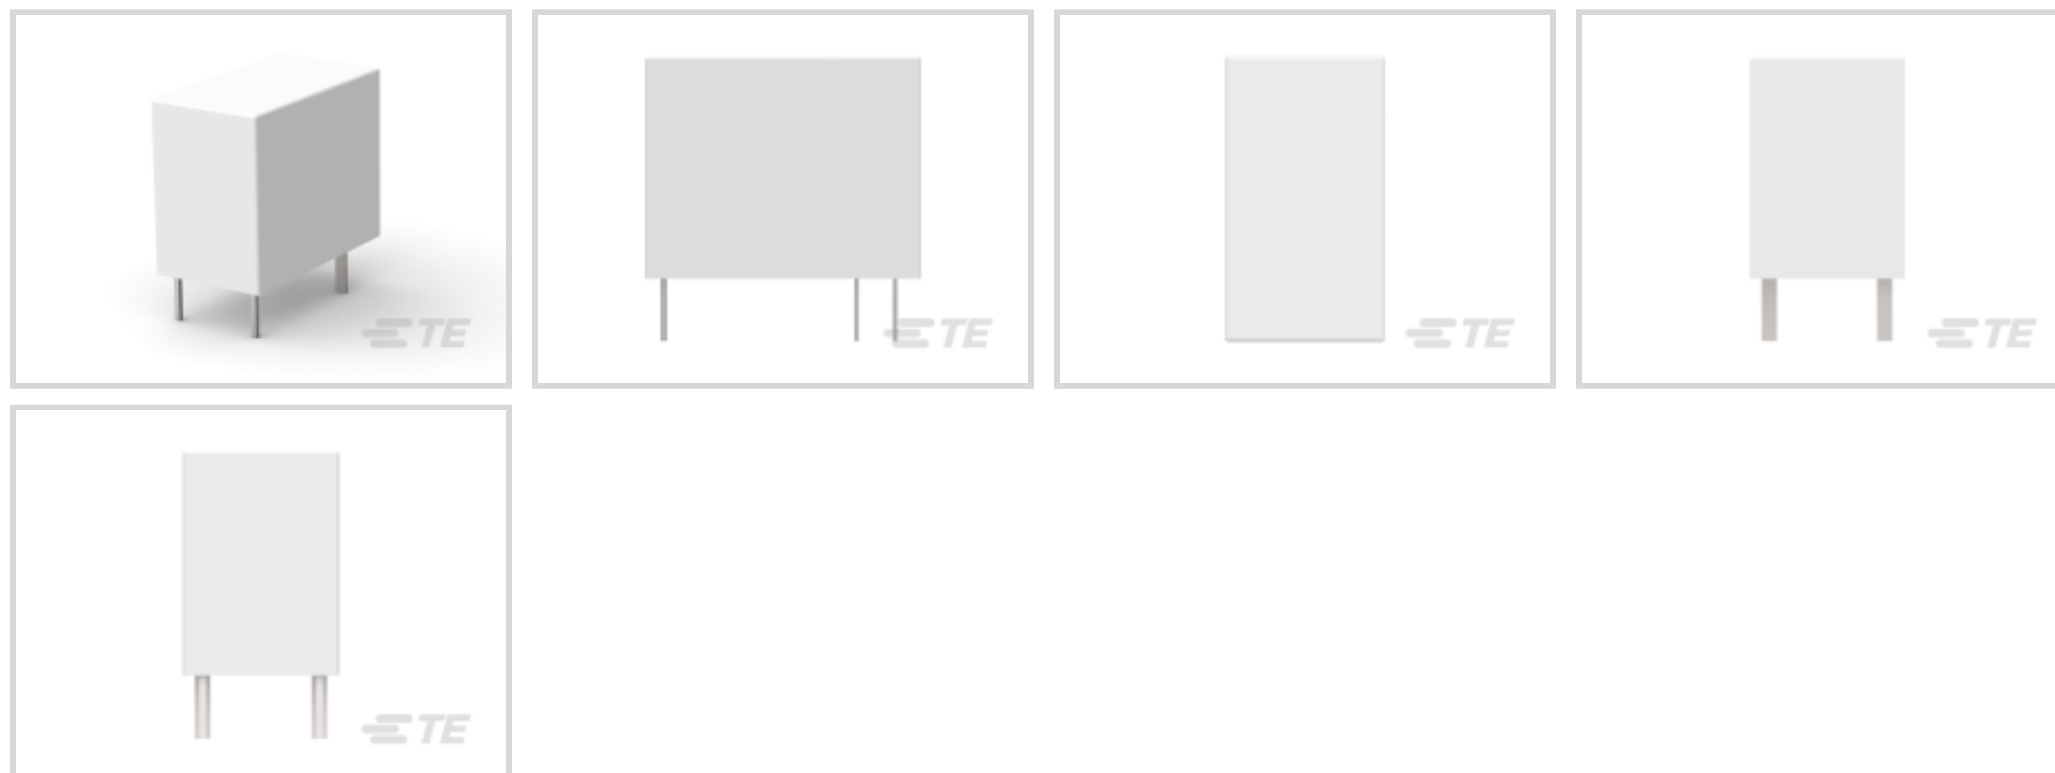

Power Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **200 mW**

Coil Resistance: **720 Ω**

Coil Special Features: **Sensitive Version, UL Coil Insulation Class E**

[All STD OEG Miniature PCB OJ/OJE Pow Relays \(65\)](#)

Features

Product Type Features

| | |
|------------------|----------|
| Power Relay Type | Standard |
|------------------|----------|

Electrical Characteristics

| | |
|--|----------------|
| Insulation Initial Dielectric Between Coil & Contact Class | 3500 – 4000 V |
| Insulation Initial Dielectric Between Open Contacts | 750 Vrms |
| Contact Limiting Making Current | 3 A |
| Contact Limiting Short-Time Current | 3 A |
| Contact Limiting Continuous Current | 3 A |
| Insulation Creepage Class | 5.5 – 8 mm |
| Coil Power Rating Class | 150 – 200 mW |
| Insulation Initial Dielectric Between Contacts & Coil | 4000 Vrms |
| Insulation Creepage Between Contact & Coil | 9.4 mm[.37 in] |
| Contact Limiting Breaking Current | 3 A |
| Coil Magnetic System | Monostable, DC |

| | |
|---------------------------------|---|
| Coil Power Rating DC | 200 mW |
| Coil Resistance | 720 Ω |
| Coil Special Features | Sensitive Version, UL Coil Insulation Class E |
| Coil Voltage Rating | 12 VDC |
| Contact Switching Load (Min) | 100mA @ 5V |
| Contact Switching Voltage (Max) | 30 VDC |
| Contact Voltage Rating | 30 VDC |

Body Features

| | |
|-----------------------------|-------------------------------------|
| Insulation Special Features | Tracking Index of Relay Base PTI250 |
| Product Weight | 9 g[.318 oz] |

Contact Features

| | |
|------------------------------|---------------|
| Contact Arrangement | 1 Form A (NO) |
| Contact Current Class | 2 – 5 A, 16 A |
| Contact Current Rating (Max) | 3 A |
| Contact Material | AgNi |
| Contact Number of Poles | 1 |
| Relay Terminal Type | PCB-THT |

Termination Features

| | |
|------------------------|--------------|
| Relay Termination Type | Through Hole |
|------------------------|--------------|

Mechanical Attachment

| | |
|---------------------|-----------------------|
| Relay Mounting Type | Printed Circuit Board |
|---------------------|-----------------------|

Dimensions

| | |
|---|------------------|
| Length Class (Mechanical) | 16 – 20 mm |
| Insulation Clearance Class | 2.5 – 4 mm |
| Height Class (Mechanical) | 14 – 15 mm |
| Insulation Clearance Between Contact & Coil | 7.7 mm[.303 in] |
| Width Class (Mechanical) | 10 – 12 mm |
| Product Width | 10.2 mm[.4 in] |
| Product Length | 18.2 mm[.717 in] |
| Product Height | 14.7 mm[.579 in] |

Usage Conditions

| | |
|---|-------------|
| Environmental Ambient Temperature Class | 85 – 105 °C |
|---|-------------|



Environmental Ambient Temperature (Max) 90 °C[194 °F]

Packaging Features

Packaging Method Box & Tray, Tray

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU Compliant

EU ELV Directive 2000/53/EC Compliant

China RoHS 2 Directive MIIT Order No 32, 2016 No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006
 Current ECHA Candidate List: JUNE 2023 (235)
 Candidate List Declared Against: JUNE 2023 (235)
 Does not contain REACH SVHC

Halogen Content Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-OE4-OJ1
 STD OEG Miniature PCB OJ/OJE Pow Relays



TE Part # 1461220-4
 OJ-SS-112LM,003

TE Part # 1461220-6
 OJ-SS-112LM,0000W

TE Part # 1649222-7
 OJE-SS-112DM,0000W

Also in the Series | OEG Miniature PCB Relay OJ/OJE




Power Relays(67)

Customers Also Bought



TE Part #2213748-1
COVER,LIGHT CONTROLLER,76MM DIA,MEDIUM

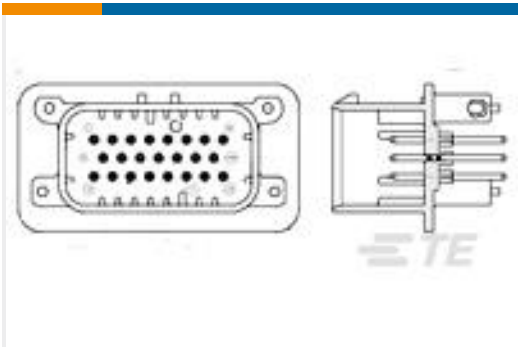

TE Part #776230-1
35POS,PIN DIA 1.3,HDR ASSY, 180DEG,COD 1




TE Part #1462038-2
IM03CGR=IM RELAY 140mW 5V HDV



TE Part #4-1623732-3
BCHE 7 W 56R 5%



TE Part #4-1879021-9
SMW3 10R 5%

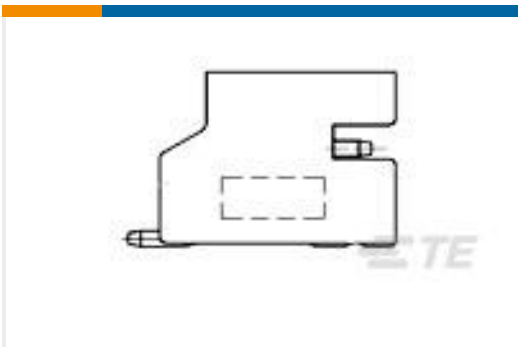

TE Part #1775469-3
HPI CONN., 2.0MM, R/A, SMT, 3P, 80U"



TE Part #1-1393194-5
T77S1D3-12



TE Part #1775485-2
Battery Holder, 3.6mm, BLU,low profile



TE Part #2176077-1
TLRS1575 6.0W R0005 1% 100PPM 2KRL



TE Part #2205483-2
CA 50MM 10 POS. MOW-PB M-M VALUE LINE

Documents

Product Drawings

[OJ-SS-112LM,000](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2-1419129-1_G.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_2-1419129-1_G.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1419129-1_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[OJ_OJE Series Relay Data Sheet English](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

[OJ-SS-112LM,000 Spec Sheet](#)

Japanese