W33-T4C1Q-12 <

Potter & Brumfield TE Internal #: 2-1423608-1 Circuit Breakers, Thermal, Poles 1 & 2 - Series Trip Overload Sensor, Illuminated, Amber, Operating Voltage 250 VAC, Operating Voltage 50 VDC

View on TE.com >

Relays, Contactors & Switches > Circuit Breakers



Circuit Breaker Type: Thermal

Circuit Function: Poles 1 & 2 - Series Trip Overload Sensor

Illuminated: Yes

Actuator Color: Amber

Operating Voltage: 250 VAC

Features

Product Type Features

Circuit Breaker Style

Illumination Type

Actuator Type

Power Switch with Optional Indicator Lamp

240VAC (Neon with Resistor)

Rocker



| Terminal Configuration | 6.35 [.25] Straight Quick Connect Tab |
|----------------------------|--|
| Circuit Breaker Type | Thermal |
| Illuminated | Yes |
| Configuration Features | |
| Panel Cutout Size | 22.22 x 44.45 mm |
| Circuit Function | Poles 1 & 2 - Series Trip Overload Sensor |
| Number of Poles | 2 |
| Electrical Characteristics | |
| Operating Voltage | 50 VDC |
| Current Rating | 12 A |
| Interrupt Capacity | 1000A @ 50VDC/250VAC or 1500A @ 125 /250VAC |
| Body Features | |
| Actuator Color | Amber |
| Contact Features | |
| | |

W33-T4C1Q-12

Circuit Breakers, Thermal, Poles 1 & 2 - Series Trip Overload Sensor, Illuminated, Amber, Operating Voltage 250 VAC, Operating Voltage 50 VDC



| Trip Time at 200% | 3 – 33 seconds | | | | | |
|---|--|--|--|--|--|--|
| Mechanical Attachment | | | | | | |
| Mounting Options | Snap-In Panel Mount | | | | | |
| Dimensions | | | | | | |
| Panel Thickness (Recommended) | .81 – 6.35 mm[.032 – .25 in] | | | | | |
| Identification Marking | | | | | | |
| Stamped Marking Type | International I/O | | | | | |
| Product Compliance For compliance documentation, visit the product page on TE.com> | | | | | | |
| EU RoHS Directive 2011/65/EU | Compliant with Exemptions | | | | | |
| EU ELV Directive 2000/53/EC | Not Compliant | | | | | |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold | | | | | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE | | | | | |

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Cadmium oxide (7.95% in Component part)

Halogen Content

Solder Process Capability

Not Yet Reviewed for halogen content

2022 (224)

SVHC > Threshold:

Article Safe Usage Statements:

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


W33-T4C1Q-12

Circuit Breakers, Thermal, Poles 1 & 2 - Series Trip Overload Sensor, Illuminated, Amber, Operating Voltage 250 VAC, Operating Voltage 50 VDC





Customers Also Bought

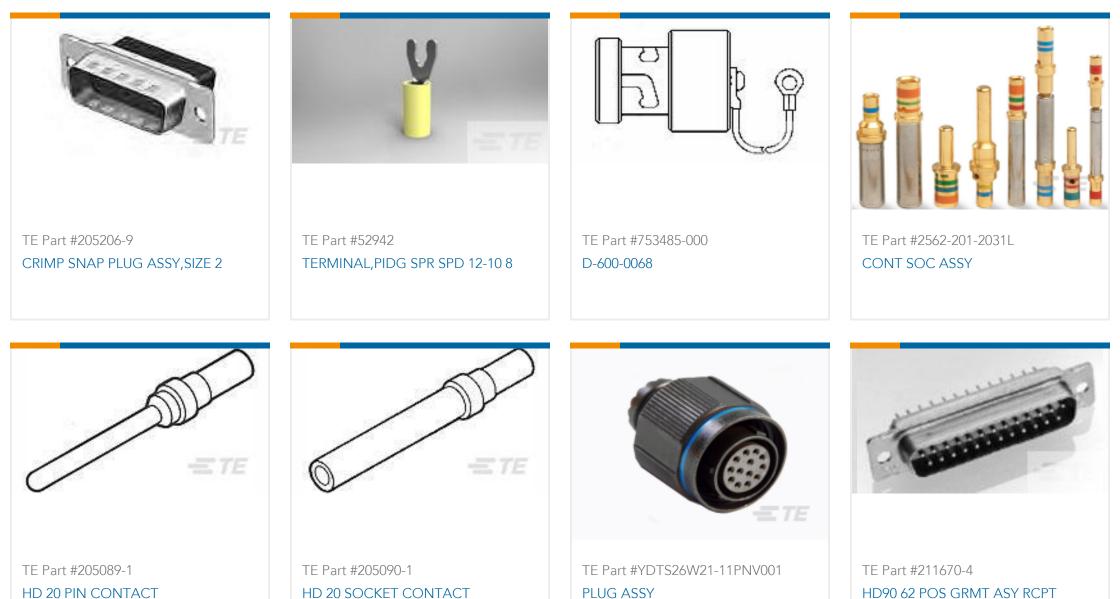

| HD 20 PIN CONTACT | HD 20 SOCKET CONTACT | PLUG ASSY | HD90 62 POS GRMT ASY RCPT |
|---|---|-----------|---------------------------|
| S | | | |
| ETE | -E TE | | |
| TE Part #YDTS32T17NV0010000 CAP ASSEMBLY | TE Part #91067-1 INSERTION/EXTRACTION TOOL | | |

Documents

CAD Files

Customer View Model ENG_CVM_2-1423608-1_0905.3d_igs.zip

English

Customer View Model

ENG_CVM_2-1423608-1_0905.3d_stp.zip

English

Customer View Model

ENG_CVM_2-1423608-1_0905.2d_dxf.zip

W33-T4C1Q-12

Circuit Breakers, Thermal, Poles 1 & 2 - Series Trip Overload Sensor, Illuminated, Amber, Operating Voltage 250 VAC, Operating Voltage 50 VDC



English
3D PDF
English
Uversations of use.
Uversations of use.
Datasheets & Catalog Pages
W33 Series
English

W33 One- and Two-Pole, Switchable Thermal Circuit Breaker / Power Switch With Optional Indicator Lamp

English