

#### Agastat

TE Internal #: 2-1437463-4 Time Delay Relays, Knob, 120 VAC Input, 125 VDC Input, Timing Range (Off-Time) 1 – 30 seconds, 5A@120VAC A, Off-Delay, Socket View on TE.com >



Relays, Contactors & Switches > Relays > Time Delay Relays



Type of Control: KnobTime Delay Relay Input Voltage: 125 VDCTiming Range (Off-Time): 1 – 30 secondsTime Delay Relay Contact Current Rating: 5A@120VACA

### Features

#### **Product Type Features**

Product Type	Relay
Relay Type	Time Delay
Product Category	Electromechanical Relays
Magnetic Blow-Out Device	Without

#### **Configuration Features**

Multiple Timing Ranges	Without							
Electrical Characteristics								
Actuating System	AC/DC							
Time Delay Relay Input Voltage	125 VDC							
Timing Range (Off-Time)	1 – 30 seconds							
Contact Features								
Contact Arrangement	2 Form C, DPDT, 2 C/O							
Type of Control	Knob							
Time Delay Relay Contact Current Rating	5A@120VAC A							
Termination Features								
Termination Type	8 Pin Octal Type Plug							
Mechanical Attachment								
Time Delay Relay Mounting Type	Socket							

### SCERX22ACA

Time Delay Relays, Knob, 120 VAC Input, 125 VDC Input, Timing Range (Off-Time) 1 – 30 seconds, 5A@120VAC A, Off-Delay, Socket



#### Dimensions

Dimensions (L x W x H) (Approximate)	50 x 50 x 83 mm[1.97 x 1.97 x 3.27 in]						
Usage Conditions							
Operating Temperature Range	-30 – 65 °C						
Operation/Application							
Mode of Operation	Off-Delay						
Other							
Repeatability (Max)	±1%						
Product Compliance For compliance documentation, visit the product page on TE.com>							
EU RoHS Directive 2011/65/EU	Compliant						
EU ELV Directive 2000/53/EC	Not Compliant						
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold						
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023						

#### Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not lead free process capable

Does not contain REACH SVHC

#### Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**


#### SCERX22ACA

Time Delay Relays, Knob, 120 VAC Input, 125 VDC Input, Timing Range (Off-Time) 1 – 30 seconds, 5A@120VAC A, Off-Delay, Socket





# Customers Also Bought

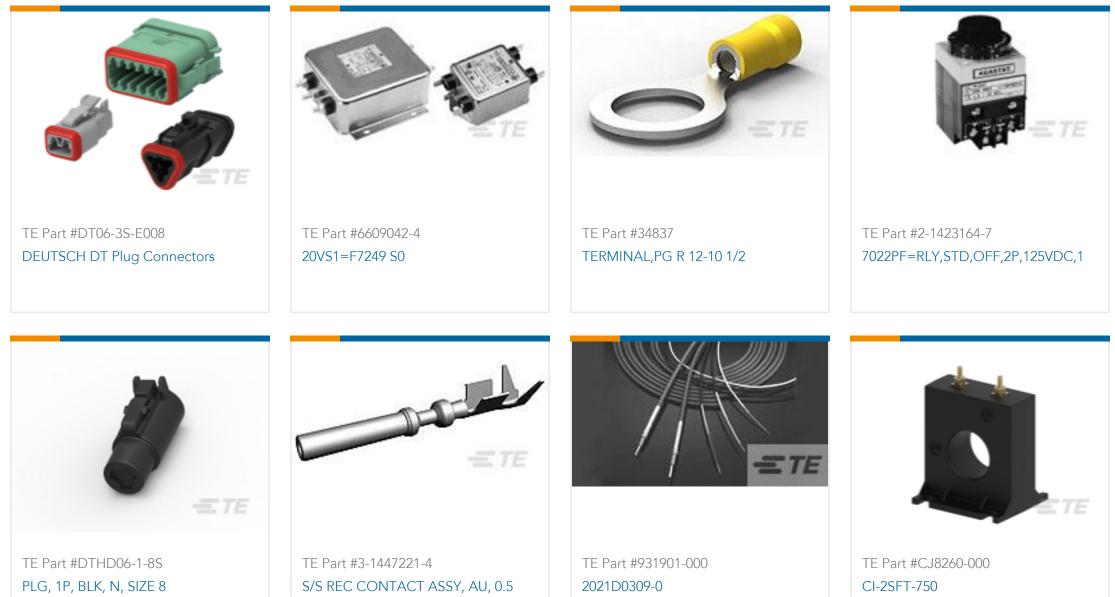

PLG, 1P, BLK, N, SIZE 8	S/S REC CONTACT ASSY, AU, 0.5	2021D0309-0	CI-2SFT-750



## Documents

Product Drawings SCERX22ACA=120V&125VDC 1 TO 30

English

Datasheets & Catalog Pages 5-1773450-5\_sec12\_SCE

English