Buchanan | Buchanan 8 Series

TE Internal #: 2-1437657-2 Barrier Strips, Tri-Barrier, Printed Circuit Pin, Wire-to-Board, 2 Position, 11.1 mm [.438 in] Centerline, 1 Row, Buchanan 8 Series View on TE.com >



Connectors > Terminal Blocks & Strips > Barrier Strips



Barrier Strip Style: Tri-Barrier

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board

Number of Positions: 2

Centerline (Pitch): 11.1 mm [.438 in]

Features

Product Type Features

| Block Style | Flat Bottom | |
|-----------------------------------|-----------------------|--|
| Connector System | Wire-to-Board | |
| Connector & Contact Terminates To | Printed Circuit Board | |
| Configuration Features | | |
| Number of Levels | 1 | |
| Number of Positions | 2 | |
| Number of Rows | 1 | |
| Electrical Characteristics | | |
| Operating Voltage | 600 V | |
| Body Features | | |
| Primary Product Color | Black | |
| Product Orientation | Right Angle | |
| Barrier Strip Style | Tri-Barrier | |
| Contact Features | | |
| | | |

C For support call+1 800 522 6752

Barrier Strips, Tri-Barrier, Printed Circuit Pin, Wire-to-Board, 2 Position, 11.1 mm [.438 in] Centerline, 1 Row, Buchanan 8 Series



| PCB Contact Termination Area Plating Material | Tin | |
|-----------------------------------------------|----------------------------------------|--|
| Contact Base Material | Copper Alloy | |
| Contact Current Rating (Max) | 30 A | |
| Termination Features | | |
| Bottom Termination Type | Printed Circuit Pin | |
| Mechanical Attachment | | |
| Screw Head Type | Wire Clamp Combo Head | |
| Screw Plating Material | Zinc | |
| Screw Material | Steel Wire Clamp Combo Head None | |
| Top Termination Type | | |
| Mounting Options | | |
| Thread Size | 8-32 | |
| Connector Mounting Type | Board Mount | |
| Housing Features | | |
| Housing Material | Thermoplastic | |
| Centerline (Pitch) | 11.1 mm[.438 in] | |

Dimensions

| Product Length | 24.08 mm[.948 in] | |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Wire Size | .326 – 5.26 mm² | |
| Usage Conditions | | |
| Operating Temperature Range | -40 – 120 °C[-40 – 248 °F] | |
| Operation/Application | | |
| Circuit Application | Power | |
| Industry Standards | | |
| UL Flammability Rating | UL 94V-0 | |
| Packaging Features | | |
| Packaging Quantity | 270 | |
| Packaging Method | Package | |
| Other | | |
| Terminal Blocks & Strips Comment | Do not order screw and captive clamp in combination with other top hardware., Other options available upon request, consult our Product Information Center. | |

Barrier Strips, Tri-Barrier, Printed Circuit Pin, Wire-to-Board, 2 Position, 11.1 mm [.438 in] Centerline, 1 Row, Buchanan 8 Series



Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| | |


Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

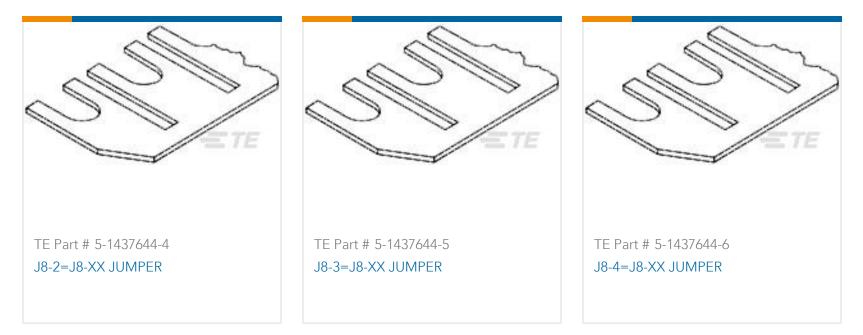

Also in the Series | Buchanan 8 Series

Barrier Strips, Tri-Barrier, Printed Circuit Pin, Wire-to-Board, 2 Position, 11.1 mm [.438 in] Centerline, 1 Row, Buchanan 8 Series



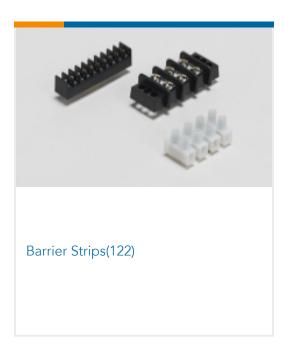

Customers Also Bought



| TE Part #18/9208-7 CPF 0402 18R 0.1% 25PPM 1K RL | TE Part #2118/22-2 STD SHIELD FRAME, CRS-38.10X25. 40X6.00MM | TE Part #1-21/6344-3 CRGCQ 1206 100R 5% | TE Part #1-21/6362-8 RQ 0402 60R4 0.1% 10PPM 5K RL | |
|-----------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------|-------------------------------------------------------|--|
| ETE | | | | |

TE Part #2-320093-1 TERMINAL,SOLIS R 16-14 10

Documents

Product Drawings 8PCR-02-006=#8 TRIBARRIER

English

CAD Files

Customer View Model

ENG_CVM_CVM_2-1437657-2_F1.3d_stp.zip

English

Customer View Model

C For support call+1 800 522 6752

Barrier Strips, Tri-Barrier, Printed Circuit Pin, Wire-to-Board, 2 Position, 11.1 mm [.438 in] Centerline, 1 Row, Buchanan 8 Series



ENG_CVM_CVM_2-1437657-2_F1.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1437657-2_F1.3d_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773458-2_BARRIER_STRIPS_QUICK_REFERENCE_GUIDE

English