2-1564337-1 <

AMP | Heavy Duty Sealed Connector Series

TE Internal #: 2-1564337-1 Housing for Female Terminals, Wire-to-Wire, 16 Position, .236 in / . 157 in [4 mm / 6 mm] Centerline, Sealable, Heavy Duty Sealed Connector Series

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > Heavy Duty Sealed Connector Series Housings



Connector System: Wire-to-Wire

Number of Positions: 16

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm, 6 mm [.157 in, .236 in]

Sealable: Yes

All Heavy Duty Sealed Connector Series Housings (204)



Features

Product Type Features

Mixed & Hybrid Connector	Yes	
Connector Shape	Rectangular	
Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Female Terminals	
Sealable	Yes	
Primary Locking Feature	On the Terminal	
Configuration Features		
Configuration Features Number of Positions	16	
	16 2	
Number of Positions		
Number of Positions Number of Rows		

Housing for Female Terminals, Wire-to-Wire, 16 Position, .236 in / .157 in [4 mm / 6 mm] Centerline, Sealable, Heavy Duty Sealed Connector Series



Body Features

Primary Product Color	Gray
Connector & Keying Code	В
Contact Features	
Contact Size	1.5K, 2.8mm
Contact Type	Receptacle
Mating Tab Width	1.6 mm, 2.8 mm[.059 in][.11 in]
Contact Current Rating (Max)	40 A
Mechanical Attachment	
Mechanical Attachment Terminal Position Assurance	Yes
	Yes Without
Terminal Position Assurance	
Terminal Position Assurance Strain Relief	Without
Terminal Position Assurance Strain Relief Mating Alignment Type	Without Keyed
Terminal Position Assurance Strain Relief Mating Alignment Type Mating Alignment	Without Keyed With
Terminal Position Assurance Strain Relief Mating Alignment Type Mating Alignment Connector Mounting Type	Without Keyed With

Dimensions

Connector Height	31.25 mm[1.23 in]
Product Width	25.7 mm[1.012 in]
Product Length	67.2 mm[2.646 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67
UL Flammability Rating	UL 94V-0
Packaging Features	

Housing for Female Terminals, Wire-to-Wire, 16 Position, .236 in / .157 in [4 mm / 6 mm] Centerline, Sealable, Heavy Duty Sealed Connector Series



Packaging Quantity	230
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Housing for Female Terminals, Wire-to-Wire, 16 Position, .236 in / .157 in [4 mm / 6 mm] Centerline, Sealable, Heavy Duty Sealed Connector Series



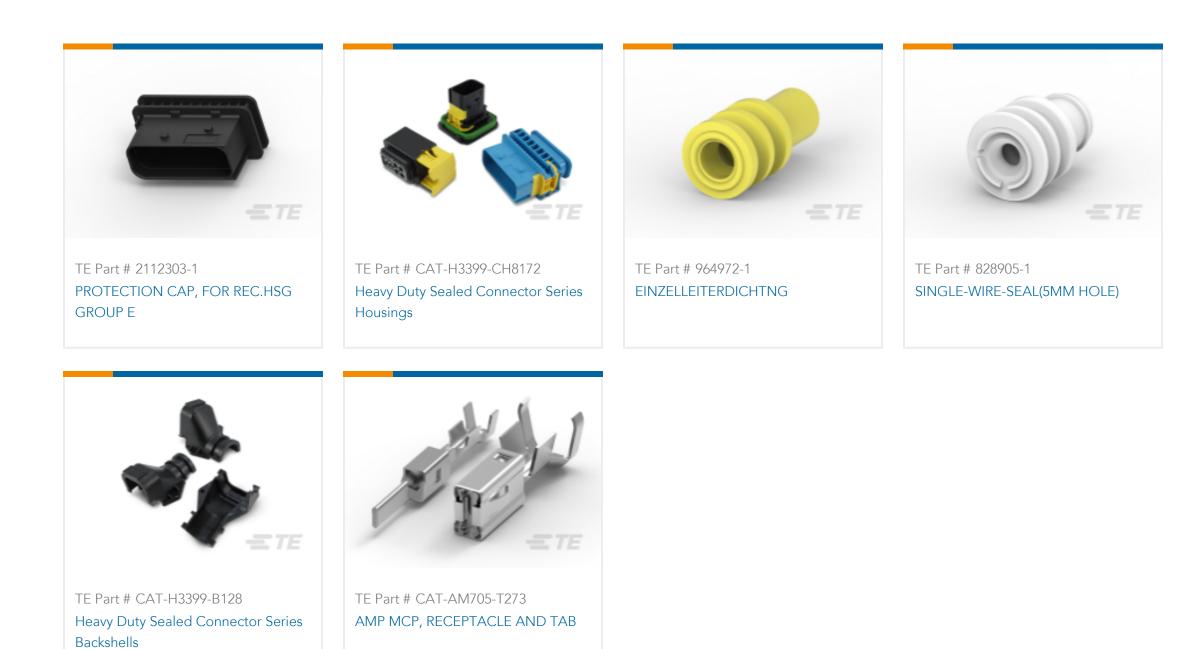

Also in the Series | Heavy Duty Sealed Connector Series

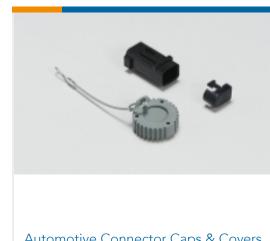



Automotive Housings(207)






Data Connectivity Headers(2)

Automotive	Connector	Caps a	COVCIS	
(25)				

Connector Seals & Cavity Plugs(5)

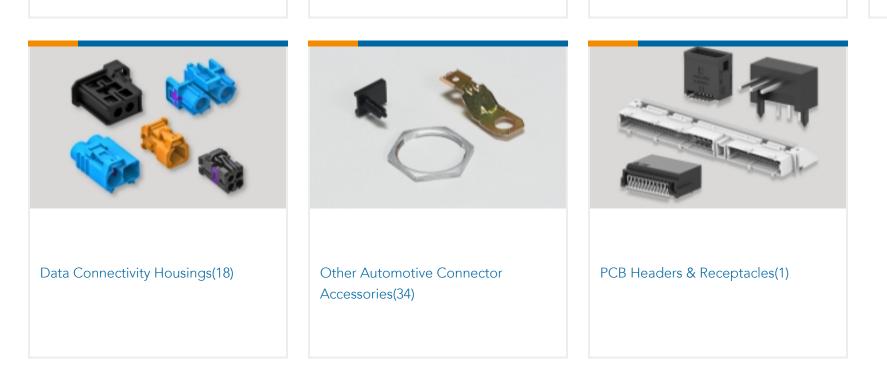

Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 16 Position, .236 in / .157 in [4 mm / 6 mm] Centerline, Sealable, Heavy Duty Sealed Connector Series



TE Part #K1007728 Klemmleiste 25-001-45-03-1

Documents

Product Drawings 16POS, MIXED, REC HSG, ASSY

English

CAD Files

Customer View Model ENG_CVM_CVM_2-1564337-1_J.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1564337-1_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1564337-1_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

HDSCS Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English