2-1703498-3 - ACTIVE

AMP | MCON Interconnection System

TE Internal #: 2-1703498-3 Housing for Male Terminals, Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, Sealable, Gray, Wire & Cable, Power, MCON Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire

Connector & Housing Type	Housing for Male Terminals		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Primary Locking Feature	On the Terminal		
Configuration Features			
Number of Positions	2		
Number of Rows	1		
Electrical Characteristics			
Operating Voltage	14 VDC		
Nominal Voltage Architecture	12 V		
Body Features			
Cable Exit Angle	180°		
Primary Product Color	Gray		
Connector & Keying Code	В		
Contact Features			

Housing for Male Terminals, Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, Sealable, Gray, Wire & Cable, Power, MCON Interconnection System



Contact Size	1.2mm
Contact Type	Tab
Contact Current Rating (Max)	25 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Connector Height	17.1 mm[.673 in]
Product Width	44 mm[1.732 in]
Product Length	14.8 mm[.583 in]

Usage Conditions

Operating Temperature (Max)	130 °C[266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	1500
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

Housing for Male Terminals, Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, Sealable, Gray, Wire & Cable, Power, MCON Interconnection System




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

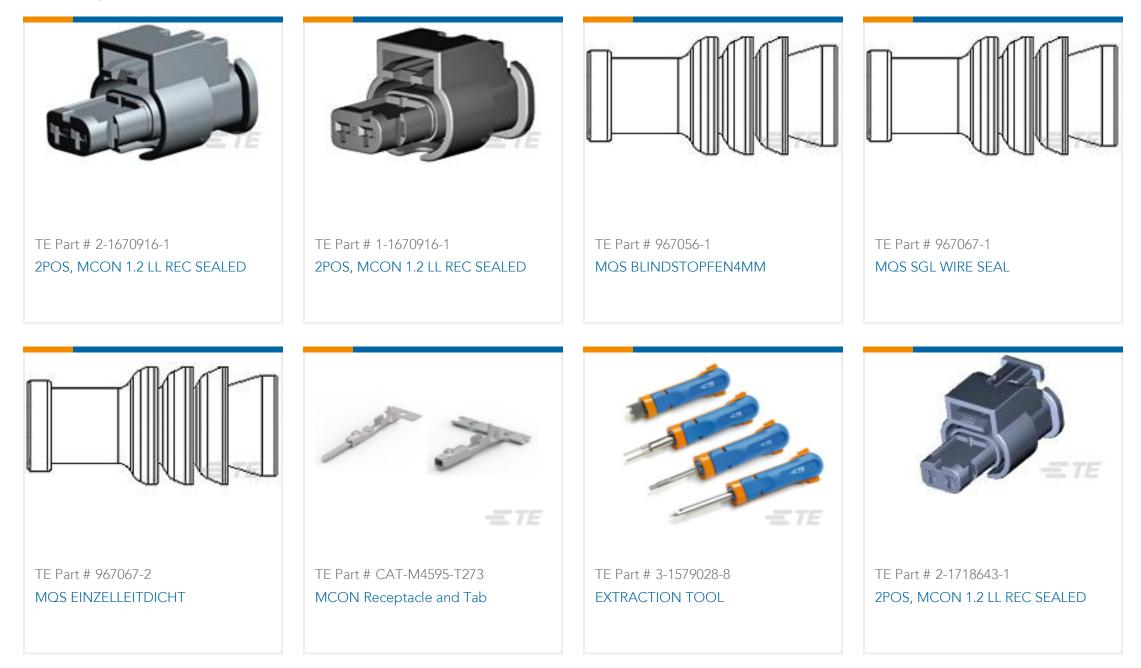


Housing for Male Terminals, Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, Sealable, Gray, Wire & Cable, Power, MCON Interconnection System





Also in the Series | MCON Interconnection System

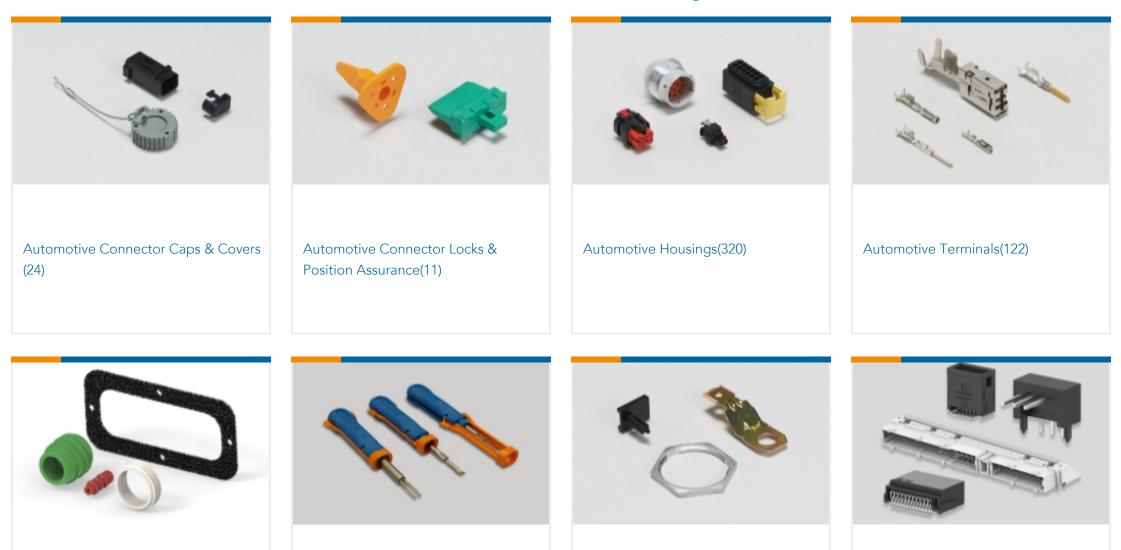

Connector Seals & Cavity Plugs(10)	Insertion & Extraction Tools(31)	Other Automotive Connector	PCB Headers & Receptacles(2)	
		Accessories(2)		

Customers Also Bought



10POS, MQS, REC HSG ASSY, UNSLD,

COD A

2POS, MCON 1.2 LL TAB SEALED

COD A

COD B

2POS, MCON 1.2 LL TAB SEALED

Housing for Male Terminals, Wire-to-Wire, 2 Position, .157 in [4 mm] Centerline, Sealable, Gray, Wire & Cable, Power, MCON Interconnection System



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1703498-3_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1703498-3_C.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_2-1703498-3_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MCON Interconnection System

English

Product Specifications Product Specification

English