

AMP | MCON Interconnection System

TE Internal #: 2-1718645-1 Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wireto-Device, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: **4**

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

Features

Product Type Features

Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	4
Number of Rows	1
Electrical Characteristics	
Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Natural
Connector & Keying Code	В

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Contact Features

Contact Size	1.2mm				
Contact Type	Receptacle				
Mating Tab Width	1.2 mm[.047 in]				
Contact Current Rating (Max)	25 A				
Mechanical Attachment					
Terminal Position Assurance	Yes				
Strain Relief	Without				
Mating Alignment Type	Keyed				
Mating Alignment	With				
Connector Mounting Type	Cable Mount (Free-Hanging)				
Housing Features					
Housing Material	PAGF				
Centerline (Pitch)	4 mm[.157 in]				
Dimensions					
Connector Height	16.5 mm[.65 in]				
Product Width	26.5 mm[1.043 in]				
Product Length	24.7 mm[.972 in]				
Usage Conditions					
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]				
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]				
Operation/Application					
Circuit Application	Power				
Industry Standards					
Degree of Protection	IP6K9K				
Packaging Features					
Packaging Quantity	1500				
Packaging Method	Box				
Other					
Serviceable	Yes				

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Connector Position Assurance Capable

Yes

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not reviewed for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

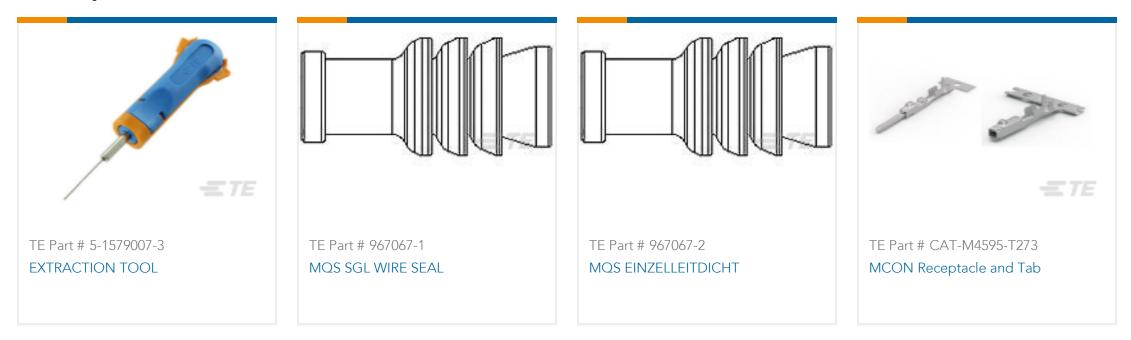

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System






TE Part # 2-1564559-1 4POS, MCON 1.2 LL TAB SEALED COD B

TE Part # 2-1718656-1 4POS, MCON 1.2 - REC. HOUSING

Also in the Series | MCON Interconnection System

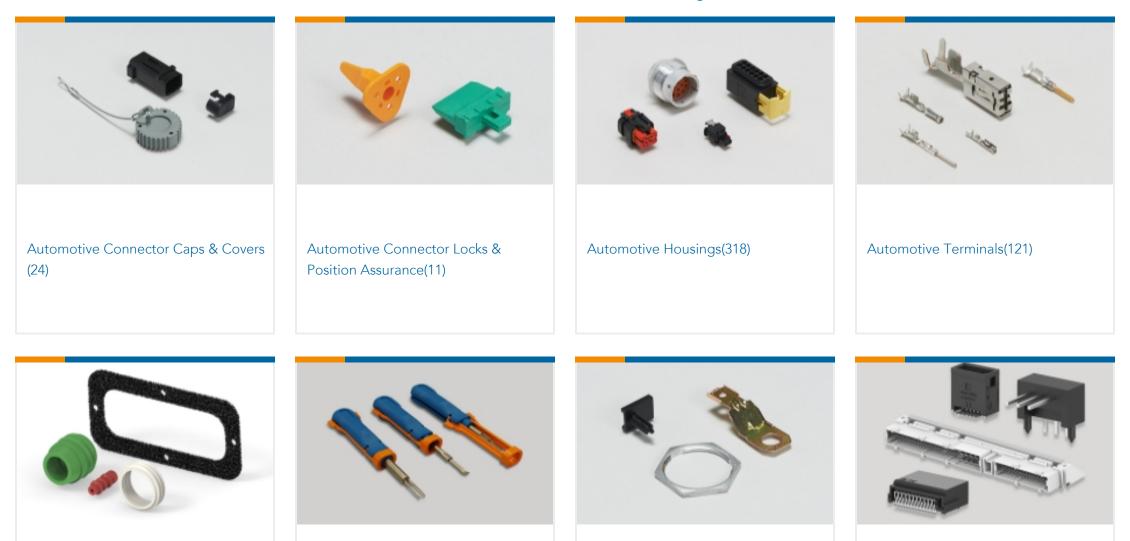

Connector Seals & Cavity Plugs(5)	Insertion & Extraction Tools(31)	Other Automotive Connector	PCB Headers & Receptacles(1)	
		Accessories(7)		

Customers Also Bought



Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 4 Position, .157 in [4 mm] Centerline, MCON Interconnection System



TE Part #2393361-1 32POS,TAB0.63X0.63,HDR ASSY, 90DEG,SLDR TE Part #4-22280-8 SPRING,COMPRESSION

Documents

Product Drawings 4POS, MCON 1.2 LL REC SEALED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1718645-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1718645-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1718645-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\text{Terms}}$ and $\ensuremath{\text{Conditions}}$ of use.

Datasheets & Catalog Pages MCON Interconnection System

English

Product Specifications Application Specification English

Application Specification

English