2-1747276-2 <

Dynamic Series | Dynamic 4000 Series

TE Internal #: 2-1747276-2 Housing, Receptacle, Wire-to-Board, 2 Position, .25 in [6.35 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 4000 Series

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >



Receptacle and Tab Housing: 6.35 mm pitch, 600V

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 2

Centerline (Pitch): 6.35 mm [.25 in]

All Receptacle and Tab Housing: 6.35 mm pitch, 600V (27)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	2
Number of Rows	1
Body Features	
Primary Product Color	Black
Termination Features	

C For support call+1 800 522 6752

09/21/2023 08:33AM | Page 1

2-1747276-2

Housing, Receptacle, Wire-to-Board, 2 Position, .25 in [6.35 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 4000 Series



Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	6.35 mm[.25 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)

Halogen Content

Solder Process Capability

(235)

Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

2-1747276-2

Housing, Receptacle, Wire-to-Board, 2 Position, .25 in [6.35 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 4000 Series



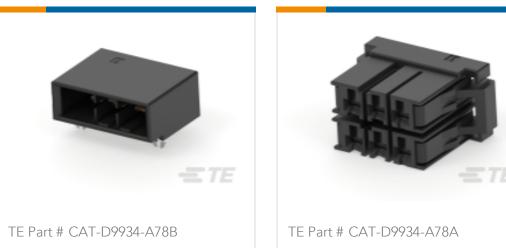

TE Part # CAT-D9934-A78B Header Assembly: Wire-to-Board, 24A, Gold Plated

TE Part # CAT-D9934-A78A Receptacle and Tab Housing: 6.35 mm pitch, 600V


Also in the Series | Dynamic 4000 Series





Wire-to-Board Connector Contacts(17)

Customers Also Bought

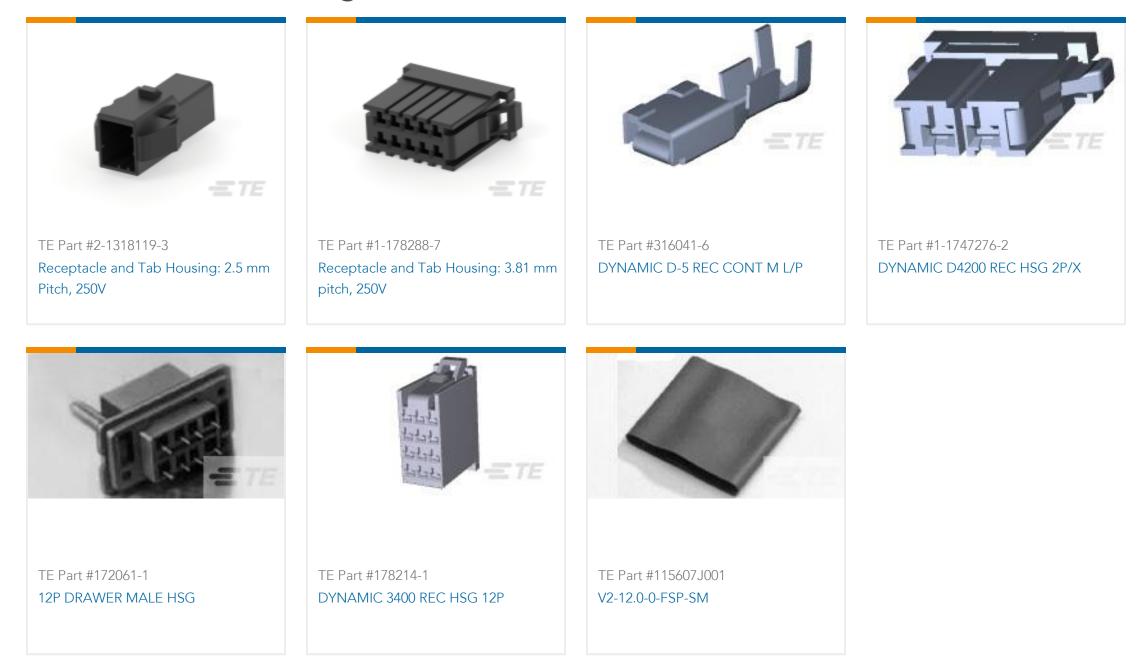

2-1747276-2

Housing, Receptacle, Wire-to-Board, 2 Position, .25 in [6.35 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 4000 Series



Documents

Product Drawings DYNAMIC D4200 REC HSG 2P/Y

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1747276-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1747276-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1747276-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

Japanese

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

English

Product Specifications Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets Extraction Tool for Dynamic 4000 Series Connector

Japanese

Instruction Sheet (non U.S.)

Japanese

Agency Approvals TUV Certificate

English