


GRACE INERTIA 2.5 TE Internal #: 2-1971793-2 Housing, Plug, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE **INERTIA 2.5**

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

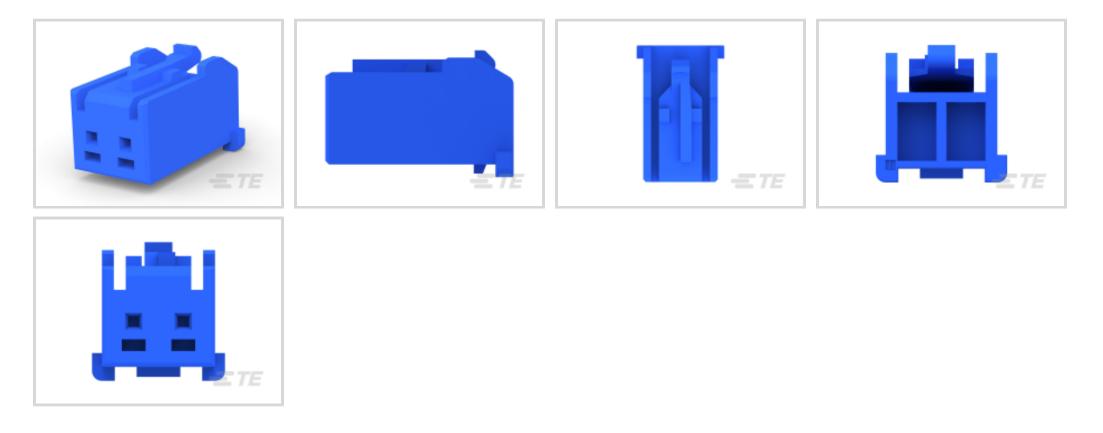

Glow Wire Sig GRACE INERTIA Plug

Connector Product Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 2.5 mm [.098 in]

All Glow Wire Sig GRACE INERTIA Plug (20)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
Operating Voltage	50 VAC
Body Features	

Housing, Plug, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



Connector & Keying Code	В	
Primary Product Color	Blue	
Contact Features		
Contact Retention Within Housing	Without	
Contact Layout	Inline	
Contact Type	Tab	
Contact Base Material	Copper Alloy	
Contact Current Rating (Max)	3 A	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Strain Relief	Without	
Panel Mount Feature	Without	
PCB Mount Retention	Without	
Mating Retention Type	Latch	
Mating Retention	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	

Housing Features

Housing Entry Configuration	Both Ends Closed	
Housing Material	PA 66 GF	
Centerline (Pitch)	2.5 mm[.098 in]	
Dimensions		
	.224 in	
Connector Height	5.88 mm[.231 in]	
Wire Size	.081 – .326 mm²	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Glow Wire Rating	Glow Wire	

Housing, Plug, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



Packaging Features

Packaging Quantity	400	
Packaging Method	Bag & Box	
Other		
Discrete Wire Connector Comment	Mating with 2-1971798-X	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing, Plug, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5







Also in the Series **GRACE INERTIA 2.5**










Connector Contacts(2)	PCB Headers & Receptacles(138)	PCB Latches, Locks & Retainers(5)	Rectangular Connector Housings(49)
A State of the second s			And And And
Rectangular Connector Locking(2)	Rectangular Power Connectors(35)	Wire-to-Board Connector Assemblies & Housings(46)	Wire-to-Board Connector Contacts(4)

Customers Also Bought

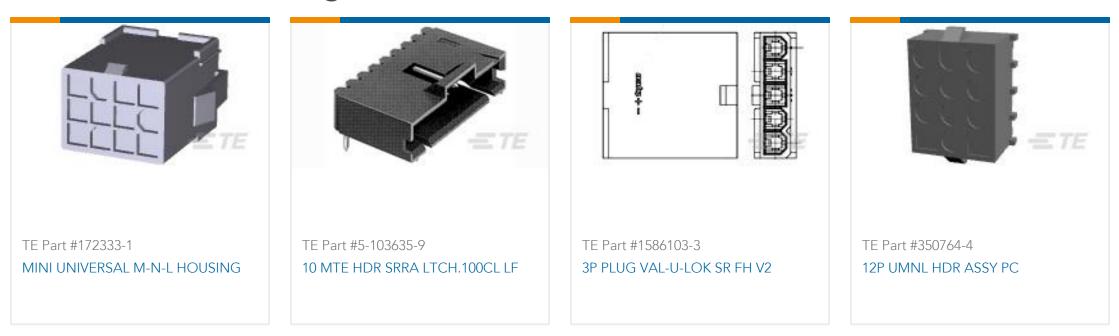

Housing, Plug, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Blue, Mating Retention, Wire & Cable, GRACE INERTIA 2.5





Documents

Product Drawings NEW GI CONN2.5 PLUG HSG 2P BLU

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1971793-2_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1971793-2_J.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1971793-2_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773465-3-GI2.5Flyer

English

7-1773465-8-GI2.5-ChineseFlyer

Product Specifications Application Specification

English