


## DEUTSCH | DEUTSCH DT

TE Internal #: 2-2303815-2 Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT

### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings

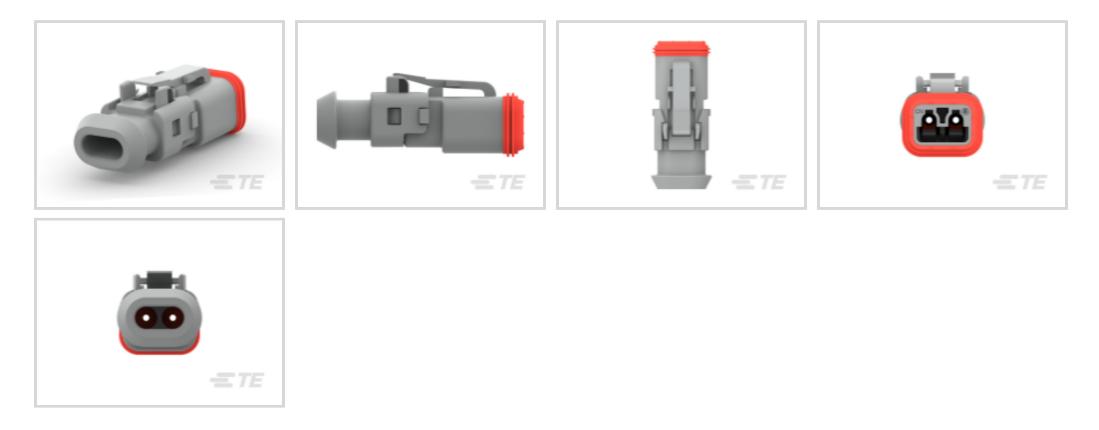

Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5.46 mm [.215 in ]

Sealable: Yes

## Features



## Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing
Configuration Features	
Configuration Features Blank Cavity Position	0
	0 2
Blank Cavity Position	
Blank Cavity Position Number of Positions	
Blank Cavity Position Number of Positions Number of Rows	

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



## **Body Features**

Cable Exit Angle	180°
Primary Product Color	Gray
Contact Features	
Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Terminal Position Assurance Strain Relief	Yes Add By Accessory
Strain Relief	Add By Accessory
Strain Relief Mating Alignment Type	Add By Accessory Polarized
Strain Relief Mating Alignment Type Mating Alignment	Add By Accessory Polarized With
Strain ReliefMating Alignment TypeMating AlignmentConnector Mounting Type	Add By Accessory Polarized With

## Dimensions

Connector Height	15.77 mm[.621 in]
Product Width	17.34 mm[.683 in]
Product Length	42.2 mm[1.661 in]
Compatible Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP68, IP6K9K
Agency/Standard	SAE J2030
UL Flammability Rating	12mm Flame Test per Standard UL-94

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



### **Packaging Features**

Packaging Quantity	1200
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5%

in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Not reviewed for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

**L** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT




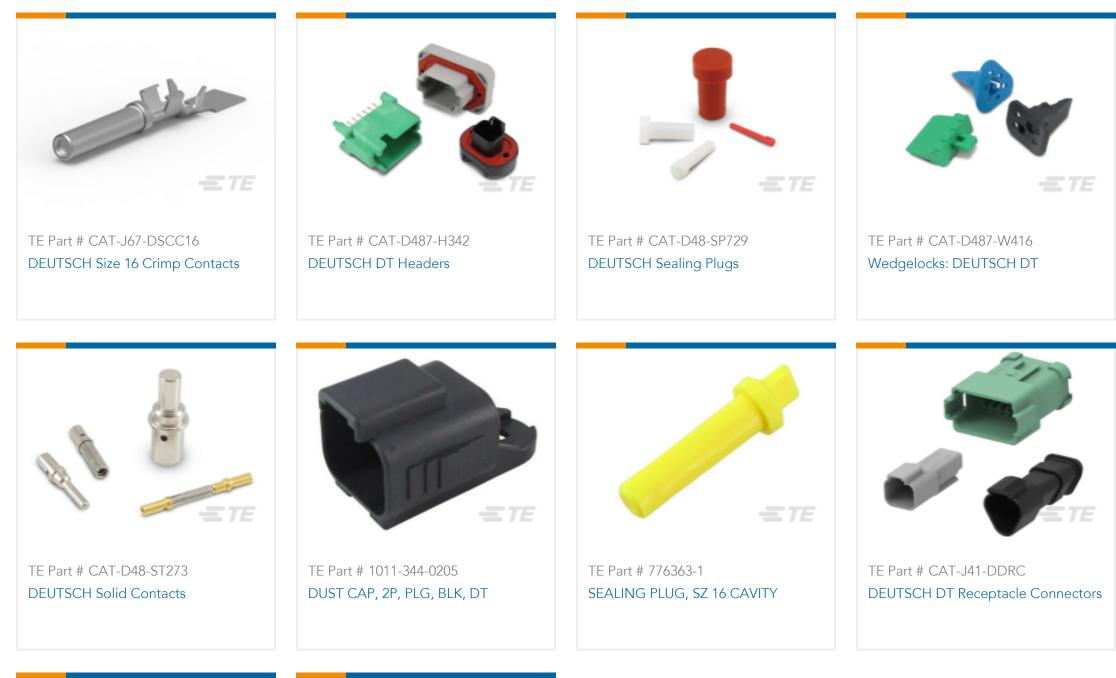



TE Part # DT-RT1 EXT TOOL, FRONT RELEASE TE Part # DTF13-2PB HDR, 2P, BLK, RA, SN/NI/CU, B

# Also in the Series DEUTSCH DT

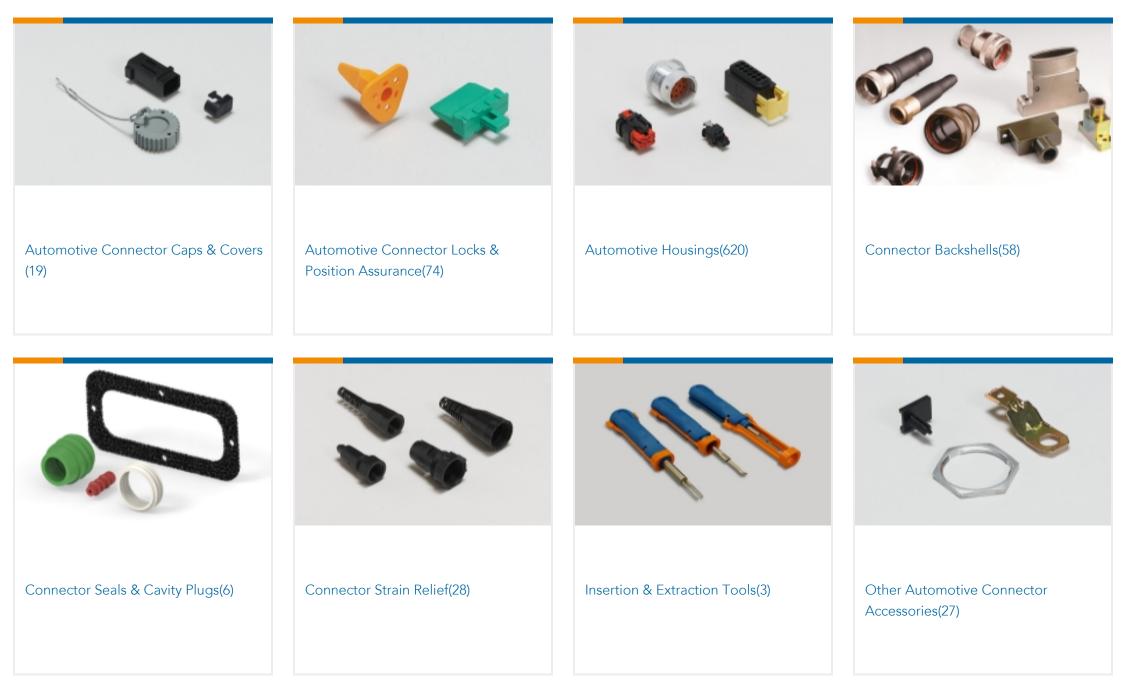

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT





# Customers Also Bought



EXT TOOL, SIZE 8, 8-10 AWG, N, GRN	DT06-3S-TN81, PLG, 3P, GRY, N,
	SNAPXCAP

## Documents

Product Drawings

## DT06-2S-TN81, PLG, 2P, GRY, N, SNAPXCAP

English

## CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-2303815-2\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-2303815-2\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2303815-2\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Product Specifications Application Specification

English

Agency Approvals UL Report

English