

DEUTSCH | DEUTSCH DT

TE Internal #: 2-2303815-3 Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5.46 mm [.215 in]

Sealable: Yes

Features



Product Type Features

Mixed & Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Female Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Configuration Features Blank Cavity Position	0	
	0 2	
Blank Cavity Position		
Blank Cavity Position Number of Positions		
Blank Cavity Position Number of Positions Number of Rows		

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Body Features

Cable Exit Angle	180°	
Primary Product Color	Black	
Contact Features		
Contact Size	Size 16	
Contact Type	Socket	
Mating Pin Diameter	1.59 mm[.063 in]	
Contact Current Rating (Max)	13 A	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Polarized	
Mating Alignment	With	
	Cable Mount (Free-Hanging)	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Connector Mounting Type Housing Features	Cable Mount (Free-Hanging)	
	Cable Mount (Free-Hanging) PA GF	

Dimensions

Connector Height	15.77 mm[.621 in]	
Product Width	17.34 mm[.683 in]	
Product Length	42.2 mm[1.661 in]	
Compatible Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Degree of Protection	IP68, IP6К9К	
Agency/Standard	SAE J2030	
UL Flammability Rating	12mm Flame Test per Standard UL-94	

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Features

Packaging Quantity	1200
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5%

in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT




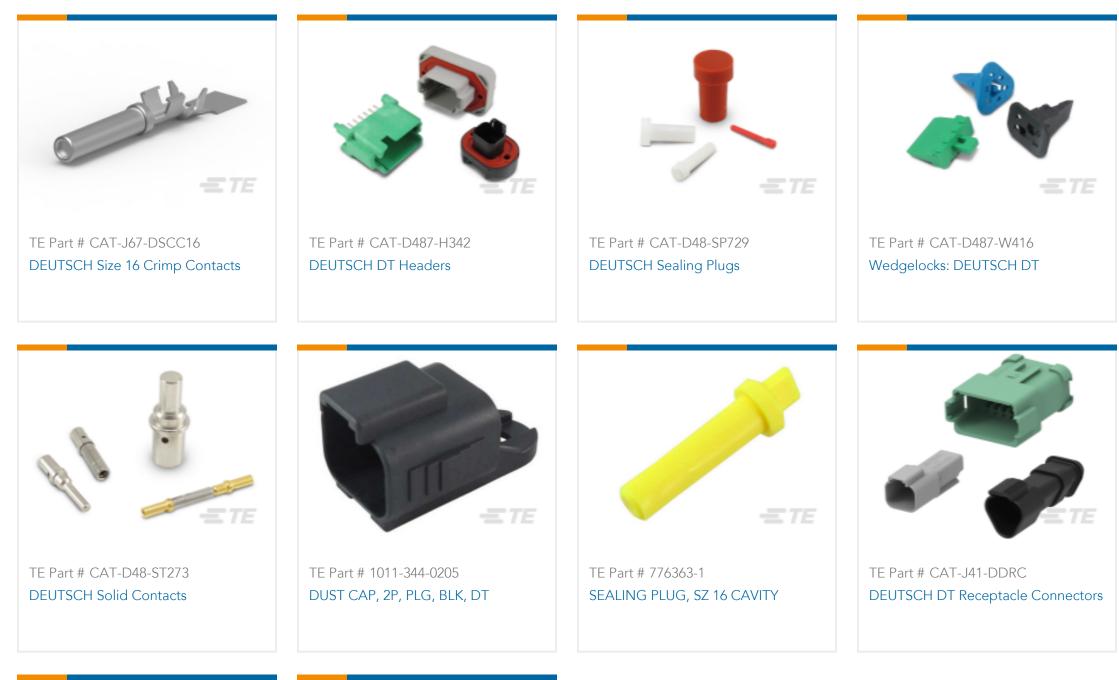



TE Part # DT-RT1 EXT TOOL, FRONT RELEASE TE Part # DTF13-2PB HDR, 2P, BLK, RA, SN/NI/CU, B

Also in the Series DEUTSCH DT

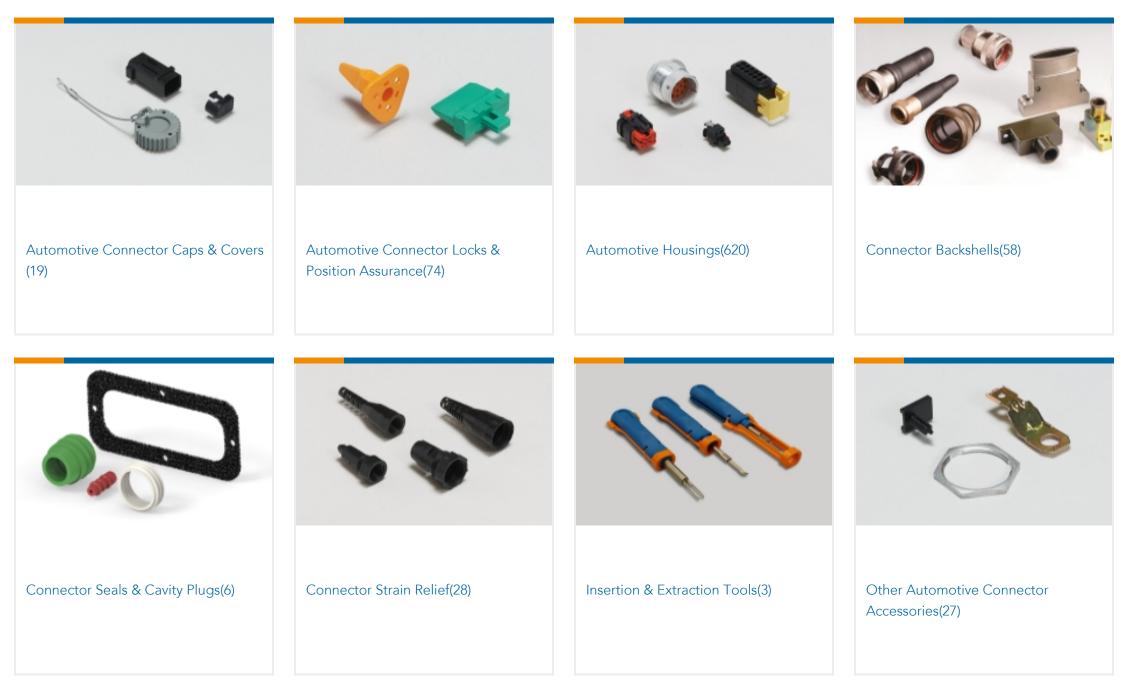

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT





Customers Also Bought



TE Part #ASDD606-09PN-HE

TE Part #964285-2

TE Part #2-2303816-2

TE Part #2-2303815-1

PLUG ASSEMBLY ASL 9-WAY	JPT A REC 2.8 Contact SRC Sn (LP)	DT06-3S-TN81, PLG, 3P, GRY, N,	DT06-2S-TE81, PLG, 2P, GRY, E,
		SNAPXCAP	SNAPXCAP

Documents

Product Drawings

DT06-2S-TN82, PLG, 2P, BLK, N, SNAPXCAP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2303815-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2303815-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2303815-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

& For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .215 in [5.46 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Product Specifications Application Specification

English

Agency Approvals

UL Report

English