2-2303816-4 - ACTIVE

### DEUTSCH | DEUTSCH DT

TE Internal #: 2-2303816-4 Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Plug Connectors



Connector System: Wire-to-Wire Number of Positions: **3** 

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 10.01 mm [.394 in]

Sealable: Yes

All DEUTSCH DT Plug Connectors (199)

### Features

### **Product Type Features**

Connector ShapeTriangularConnector SystemWire-to-WireConnector & Housing TypeHousing for Female TerminalsSealableYesConnector & Contact Terminates ToWire & CablePrimary Locking FeatureIntegrated in HousingPrimary Locking FeaturesJBlank Cavity Position0Connector Seal CodeE SealNumber of Positions3Electrical CharacteristicsIntegratement	Mixed & Hybrid Connector	No
Connector & Housing TypeHousing for Female TerminalsSealableYesConnector & Contact Terminates ToWire & CablePrimary Locking FeatureIntegrated in HousingConfiguration Features0Blank Cavity Position0Connector Seal CodeE SealNumber of Positions3	Connector Shape	Triangular
SealableYesConnector & Contact Terminates ToWire & CablePrimary Locking FeatureIntegrated in HousingConfiguration FeaturesBlank Cavity Position0Connector Seal CodeE SealNumber of Positions3	Connector System	Wire-to-Wire
Connector & Contact Terminates ToWire & CablePrimary Locking FeatureIntegrated in HousingConfiguration FeaturesBlank Cavity Position0Connector Seal CodeE SealNumber of Positions3	Connector & Housing Type	Housing for Female Terminals
Primary Locking FeatureIntegrated in HousingConfiguration Features0Blank Cavity Position0Connector Seal CodeE SealNumber of Positions3	Sealable	Yes
Configuration FeaturesBlank Cavity Position0Connector Seal CodeE SealNumber of Positions3	Connector & Contact Terminates To	Wire & Cable
Blank Cavity Position0Connector Seal CodeE SealNumber of Positions3	Primary Locking Feature	Integrated in Housing
Connector Seal CodeE SealNumber of Positions3	Configuration Features	
Number of Positions 3	Blank Cavity Position	0
	Connector Seal Code	E Seal
Electrical Characteristics	Number of Positions	3
	Electrical Characteristics	

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

### **Housing Features**

Housing Material	PAGF
Centerline (Pitch)	10.01 mm[.394 in]
Dimensions	
Connector Height	23.89 mm[.94 in]
Product Width	20.17 mm[.794 in]
Product Length	41.94 mm[1.651 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP68, IP6K9K
Agency/Standard	SAE J2030

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



UL Flammability Rating	12mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	900
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
•	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Not Low Halogen - contains Br or Cl > 900 ppm.

Halogen Content

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



### **Compatible Parts**

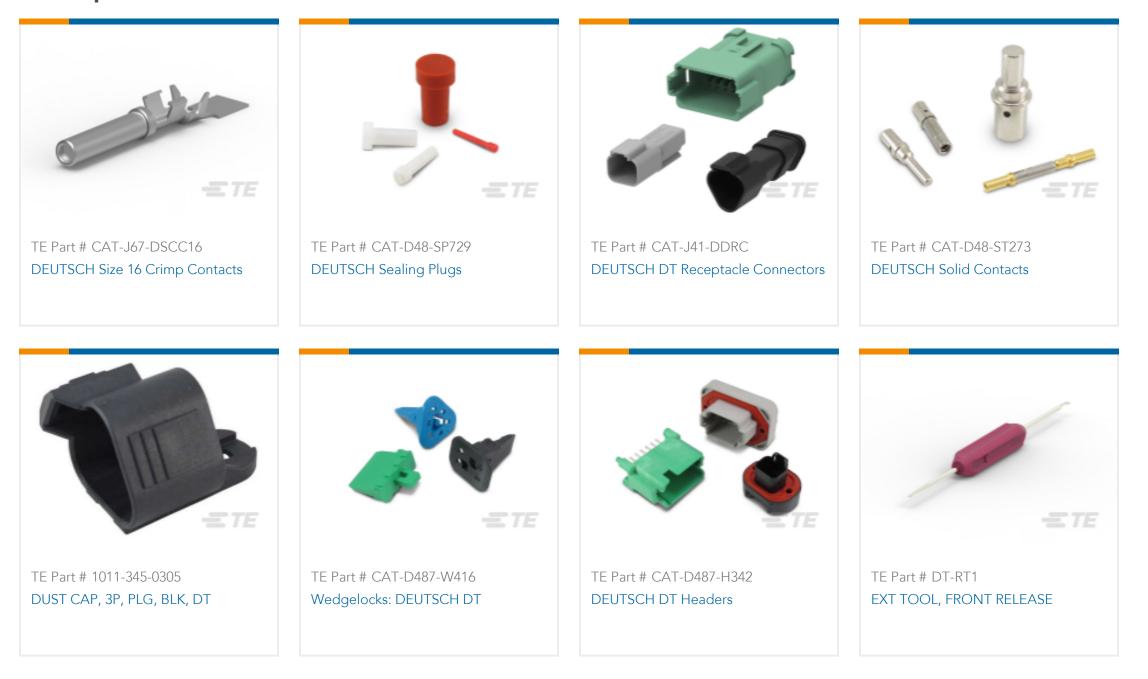

# Also in the Series | DEUTSCH DT



			(C)
Automotive Connector Caps & Covers (19)	Automotive Connector Locks & Position Assurance(74)	Automotive Housings(620)	Connector Backshells(58)
Connector Seals & Cavity Plugs(6)	Connector Strain Relief(28)	Insertion & Extraction Tools(3)	Other Automotive Connector Accessories(27)

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT





## Customers Also Bought



DT06-3S-TE81, PLG, 3P, GRY, E, SNAPXCAP	DT06-3S-TE32, PLG, 3P, BLK, E, SNAPCAP	DT06-3S-TN81, PLG, 3P, GRY, N, SNAPXCAP	DT06-2S-TE81, PLG, 2P, GRY, E, SNAPXCAP
TE Part #6441606001			
DR-25-1/8-0-10M			

### Documents

Product Drawings DT06-3S-TE82, PLG, 3P, BLK, E, SNAPXCAP

English

### **CAD** Files

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-2303816-4\_A.2d\_dxf.zip

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



English
Customer View Model

ENG\_CVM\_CVM\_2-2303816-4\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2303816-4\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals UL Report

English