
2-2338245-3 - ACTIVE

### Economy Power 2.5

TE Internal #: 2-2338245-3 PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 2.5 mm [. 098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5

#### View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

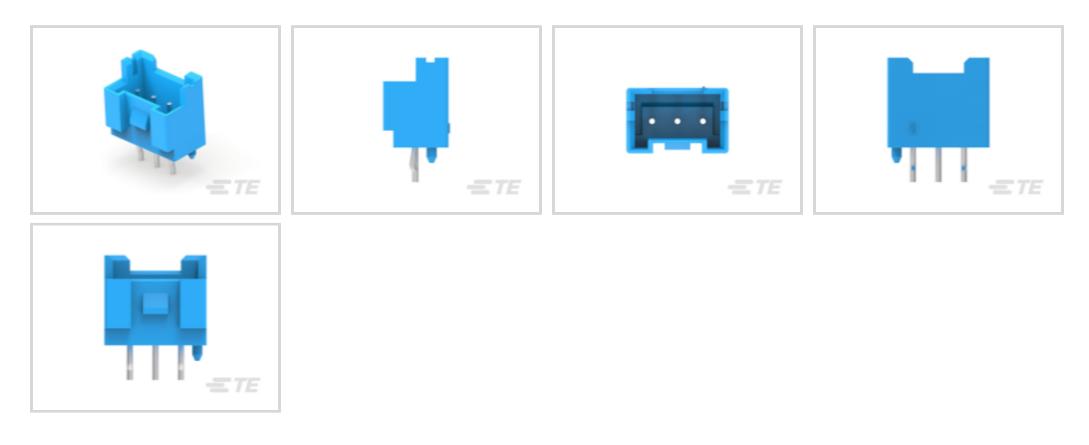

Connector System: Wire-to-Board

Number of Positions: 3

Number of Rows: 1

Centerline (Pitch): 2.5 mm [.098 in]

PCB Mount Orientation: Vertical

### Features

connectivity

### Product Type Features

Connector System	Wire-to-Board					
Header Type	Fully Shrouded					
Sealable	No					
Connector & Contact Terminates To	Printed Circuit Board					
PCB Connector Assembly Type	PCB Mount Header					
Configuration Features						
Number of Positions	3					
Number of Rows	1					
PCB Mount Orientation	Vertical					
Body Features						
Primary Product Color	Blue					
Contact Features						
Contact Mating Area Plating Material Thickness	2 µm[80 µin]					
Contact Mating Area Plating Material Finish	Bright					

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5



Contact Underplating Material	Nickel
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	4.2 A
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
Housing Features	
Housing Material	PBT
Centerline (Pitch)	2.5 mm[.098 in]

### Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Type	Bag, Box
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	
	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5



Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




## Also in the Series | Economy Power 2.5

	Contraction of the second		
PCB Headers & Receptacles(494)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)	Wire-to-Board Connector Assemblies & Housings(311)

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5





## Customers Also Bought



6P, PL RAST 5 Tab Header, TH,Vertical	7P, PL RAST 5 Tab Header, TH,Vertical	SGI2.0 HEADER ASSEMBLY SMT 6P,	04P EP SHRD HDR ASMY, YELLOW
		KEY A,NTL	



### Documents

Product Drawings EP2.5 HDR 3P VERT BOSS, BLUE, UL

English

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-2338245-3\_A.2d\_dxf.zip

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Economy Power 2.5



English

Customer View Model ENG\_CVM\_CVM\_2-2338245-3\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2338245-3\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals UL Report

English