2-292141-0 - ACTIVE

AMP CT

TE Internal #: 2-292141-0 PCB Mount Header, Vertical, Wire-to-Board, 20 Position, 2 mm [. 079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > CT 2mm Dbl Row Assembly w/Boss: Vert.



Connector System: Wire-to-Board Number of Positions: **20**

Number of Rows: 2

Centerline (Pitch): 2 mm [.079 in]

PCB Mount Orientation: Vertical

All CT 2mm Dbl Row Assembly w/Boss: Vert. (26)



Features

Product Type Features

Connector System	Wire-to-Board			
Header Type	Fully Shrouded			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
PCB Connector Assembly Type	PCB Mount Header			
Configuration Features				
Number of Positions	20			
Number of Rows	2			
PCB Mount Orientation	Vertical			
Electrical Characteristics				
Operating Voltage	125 VAC			
Body Features				

PCB Mount Header, Vertical, Wire-to-Board, 20 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT



Primary Product Color	Natural
Contact Features	
Contact Mating Area Length	4.7 mm[.185 in]
PCB Contact Termination Area Plating Material Thickness	1 μm[39.37 μin]
Contact Layout	Inline
Mating Pin Diameter	.6 mm[.024 in]
Contact Shape & Form	Round, Rounded
Contact Mating Area Plating Material Finish	Bright
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	4 A
Termination Features	
Round Termination Post & Tail Diameter	.6 mm[.024 in]

3.2 mm[.126 in]

Through Hole - Solder

Mechanical Attachment

Termination Post & Tail Length

Termination Method to Printed Circuit Board

PCB Mount Alignment Type	Boss
Mating Alignment Type	Polarization
Mating Retention	Without
PCB Mount Retention Type	Boardlock
Mating Retention Type	Polarized Lock
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
Housing Features	
Housing Material	66 Nylon
Centerline (Pitch)	2 mm[.079 in]
Dimensions	
Connector Length	25.9 mm[1.02 in]

PCB Mount Header, Vertical, Wire-to-Board, 20 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT



Connector Height	7.5 mm[.295 in]	
Connector Width	10.7 mm[.421 in]	
PCB Thickness (Recommended)	1.6 mm[.063 in]	
Row-to-Row Spacing	6.5 mm[.256 in]	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Assembly Process Feature	Pick and Place Cover	
Circuit Application	Power & Signal	
Circuit Application Industry Standards	Power & Signal	
	Power & Signal CSA, UL	
Industry Standards		
Industry Standards Agency/Standard	CSA, UL	
Industry Standards Agency/Standard Approved Standards	CSA, UL CSA LR7189, UL E28476	
Industry Standards Agency/Standard Approved Standards UL Flammability Rating	CSA, UL CSA LR7189, UL E28476	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Wave solder capable to 240°C	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

PCB Mount Header, Vertical, Wire-to-Board, 20 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series AMP CT




PCB Connector Mounting(46)	PCB Headers & Receptacles(756)	Wire-to-Board Connector Assemblies & Housings(256)	Wire-to-Board Connector Contacts(8)
----------------------------	--------------------------------	---	-------------------------------------

Customers Also Bought



PCB Mount Header, Vertical, Wire-to-Board, 20 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT



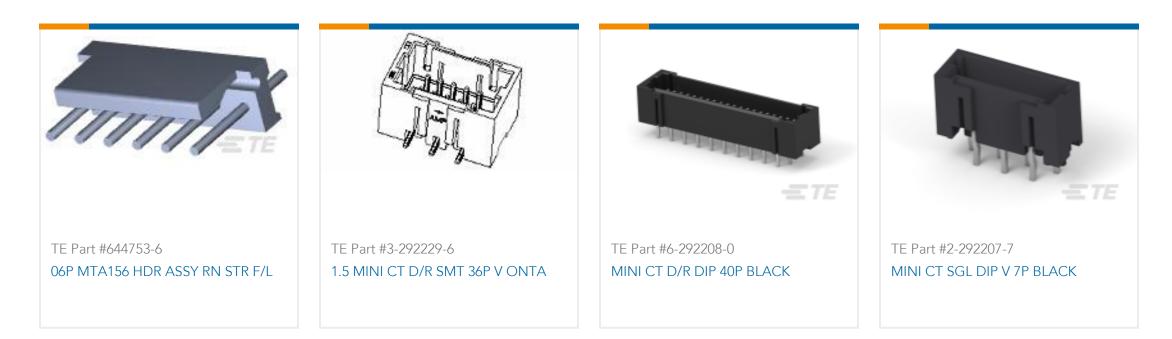



Documents

Product Drawings CT DOUBLE ROW ASSY V 20P W/BOS

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2-292141-0_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-292141-0_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-292141-0_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English

Product Specification

English

CT DOUBLE ROW CONNECTOR, LEAD FREE VERSION

Japanese

Product Specification

Japanese

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 20 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT



Product Environmental Compliance Product Compliance

English

Product Compliance

English