
2-321026-1 ACTIVE

PLASTI-GRIP

TE Internal #: 2-321026-1 Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, 202 – 810 CMA Wire Size, Copper, Yellow, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Splices

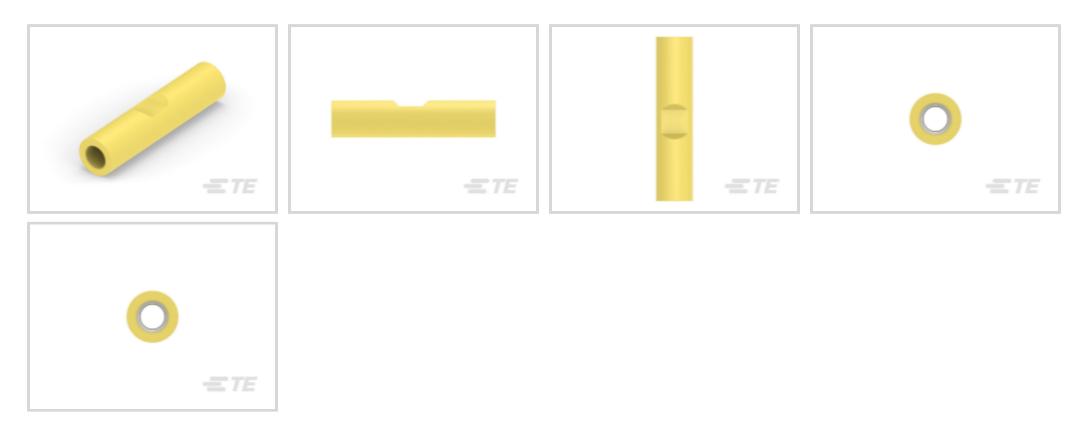

Wire Size: .12 – .4 mm²

Sealable: No

Splice Features: Serrated

Compatible Insulation Diameter Range: 2.03 mm [.08 in]

Features

Product Type Features



Splice Accessory Type	Splice
Sealable	No
Splice Type	Butt Splice
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	.257 g
Insulation Material	Vinyl
Splice Features	Serrated
Primary Product Color	Yellow
Contact Features	
Terminal Plating Material	Tin
Contact Base Material	Copper

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, 202 – 810 CMA Wire Size, Copper, Yellow, PLASTI-GRIP



Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	202 – 810 CMA
Compatible Insulation Diameter Range	2.03 mm[.08 in]
Product Length	15.75 mm[.62 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	105 °C[221 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	4000
Packaging Method	Tape Mounted

Other

Terminals & Splices Comment

26-22 splices are 26-24 range in accordance with MIL-T-7928.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

C For support call+1 800 522 6752

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, 202 – 810 CMA Wire Size, Copper, Yellow, PLASTI-GRIP



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | PLASTI-GRIP

			and the second
Compression Connectors(3)	Crimp Wire Pins, Tabs & Ferrules(25)	Ring Terminals(333)	Spade Terminals(195)



Customers Also Bought

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, 202 – 810 CMA Wire Size, Copper, Yellow, PLASTI-GRIP





-**E** TE

TE Part #2-2205130-4 CA MINI IO TYPE II PIGTAIL

Documents

TE Part #1-794608-0

PIN CONT 20-24 TIN PLATE STRIP

Product Drawings SPLICE,PG BUTT 26-22

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2-321026-1_G.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_2-321026-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-321026-1_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

C For support call+1 800 522 6752

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm² Wire Size, Serrated, 202 – 810 CMA Wire Size, Copper, Yellow, PLASTI-GRIP



Application Specification

English