
2-322329-2 - ACTIVE

SOLISTRAND

TE Internal #: 2-322329-2 Closed Ring Tongue Terminal, 16 – 14 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated

View on TE.com >

Terminals & Splices > Ring Terminals

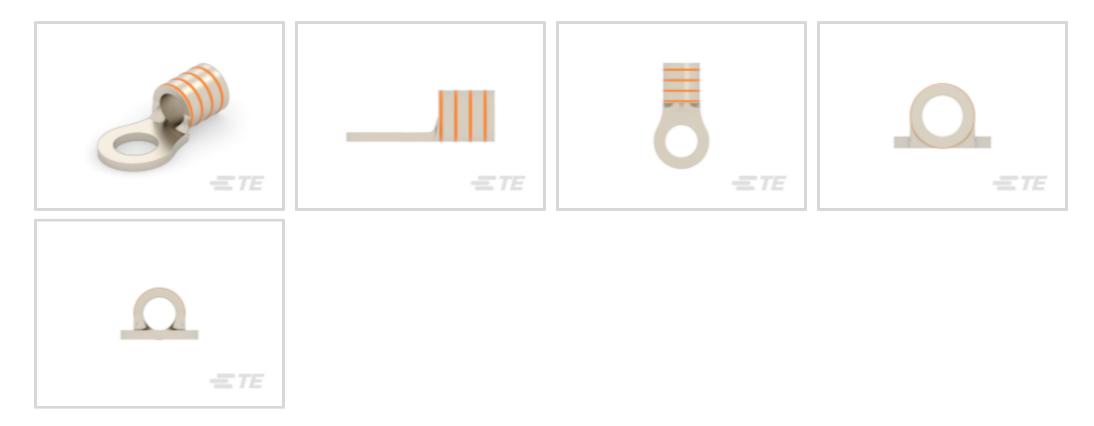

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: #6, M3.5

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#6, M3.5
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	2
Body Features	
Product Weight	.561 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Nickel
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	



2-322329-2

Closed Ring Tongue Terminal, 16 – 14 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated



Wire Size	2050 – 5180 CMA
Stud Diameter	3.68 mm[.145 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	12.19 mm[.48 in]
Barrel Inside Diameter	2.16 mm[.085 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	649 °C[1200 °F]
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	5000
Packaging Method	Tape Mounted
Product Compliance	
or compliance documentation, visit the product page on TE.com>	

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive	2011/65/EU
-------------------	------------

Compliant

EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

2-322329-2

Closed Ring Tongue Terminal, 16 – 14 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated




requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Customers Also Bought

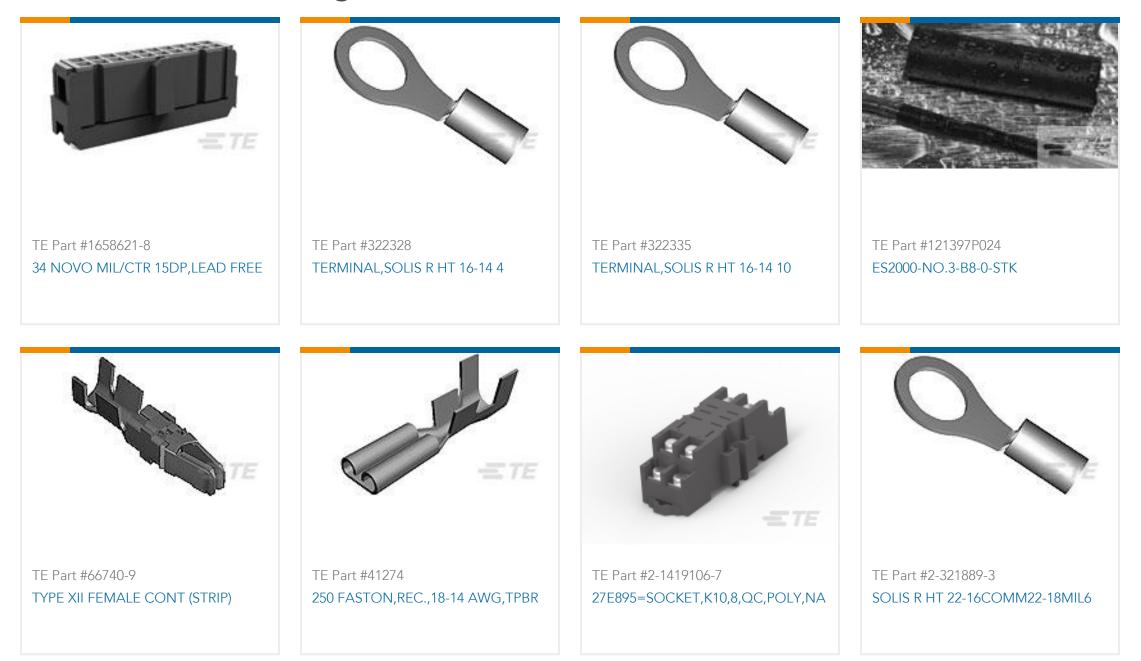



Documents

Product Drawings TERMINAL, SOLIS R HT 16-14 6

English

2-322329-2

Closed Ring Tongue Terminal, 16 – 14 AWG, M3.5 / #6 Stud Size, 3.68 mm [.145 in] Stud Diameter, Closed Barrel, Straight, Nickel, Uninsulated



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-322329-2_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-322329-2_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-322329-2_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification English