
2-34146-5 O DO NOT USE FOR NEW DESIGN

PLASTI-GRIP

TE Internal #: 2-34146-5 Closed Ring Tongue Terminal, 22 – 16 AWG, #10 Stud Size, 5 mm [. 197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Ring Terminals

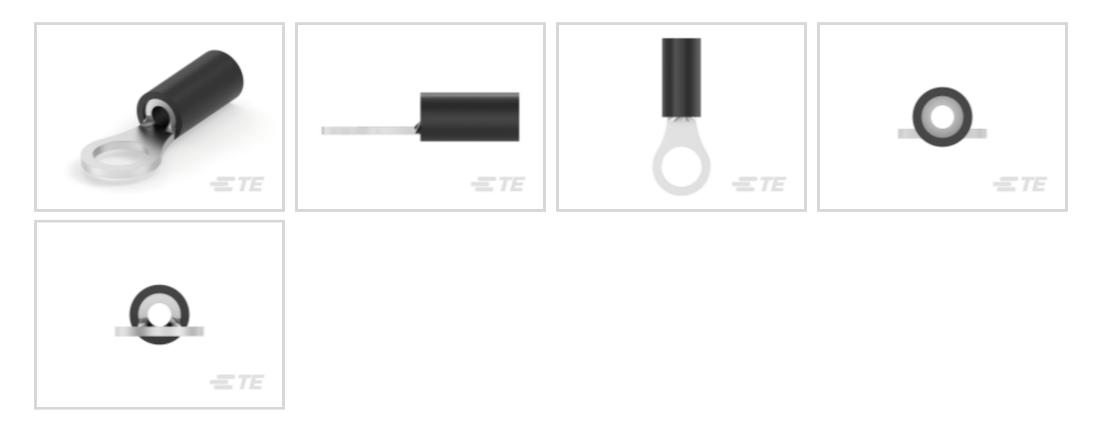

Ring Terminal Product Type: Closed Ring Tongue Terminal


Wire Size: 509 – 3260 CMA

Stud Size: **#10**

Features

Product Type Features

| Ring Terminal Product Type | Closed Ring Tongue Terminal |
|--|-----------------------------|
| Stud Size | #10 |
| Sealable | No |
| Wire Insulation Support Retention Type | Insulation Support |
| Configuration Features | |
| Number of Holes | 1 |
| Electrical Characteristics | |
| Voltage Rating | 600 V |
| Body Features | |
| Product Weight | .155 g |
| Contact Features | |
| Barrel Type | Closed |
| Terminal Orientation | Straight |
| Terminal Plating Material | Tin |
| Mechanical Attachment | |





Closed Ring Tongue Terminal, 22 – 16 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



| Wire Insulation Support | With |
|---------------------------------------|-------------------------------|
| Dimensions | |
| Wire Size | 509 – 3260 CMA |
| Stud Diameter | 5 mm[.197 in] |
| Tongue Thickness | .79 mm[.031 in] |
| Product Length | 20.55 mm[.81 in] |
| Compatible Insulation Diameter (Max) | 3.56 mm[.14 in] |
| Compatible Insulation Diameter Range | 2.67 – 3.56 mm[.105 – .14 in] |
| Jsage Conditions | |
| Insulation Option | Partially Insulated |
| Operating Temperature Range | 105 °C[221 °F] |
| Operation/Application | |
| Compatible With Wire Base Material | Copper |
| Compatible With Wire Plating Material | Tin |
| | |
| ndustry Standards | |

Packaging Features

Packaging Quantity

Packaging Method

5000

Tape Mounted

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not applicable for solder process capability |

Closed Ring Tongue Terminal, 22 – 16 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts







Also in the Series | PLASTI-GRIP

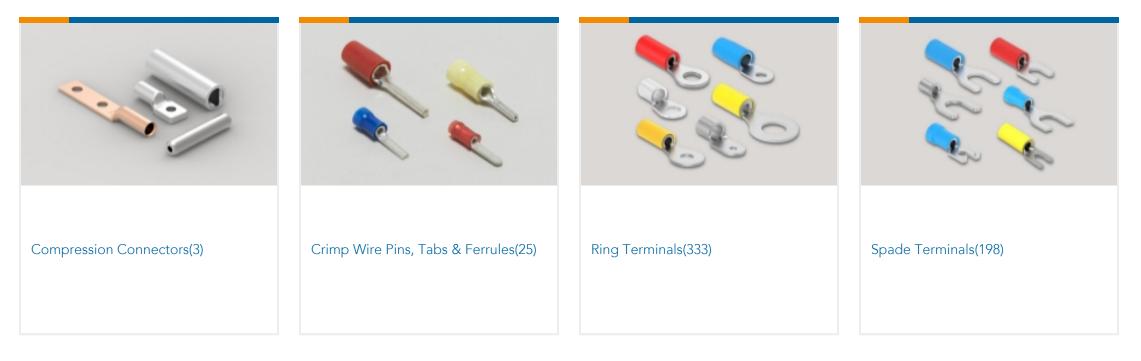


Closed Ring Tongue Terminal, 22 – 16 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP





Customers Also Bought

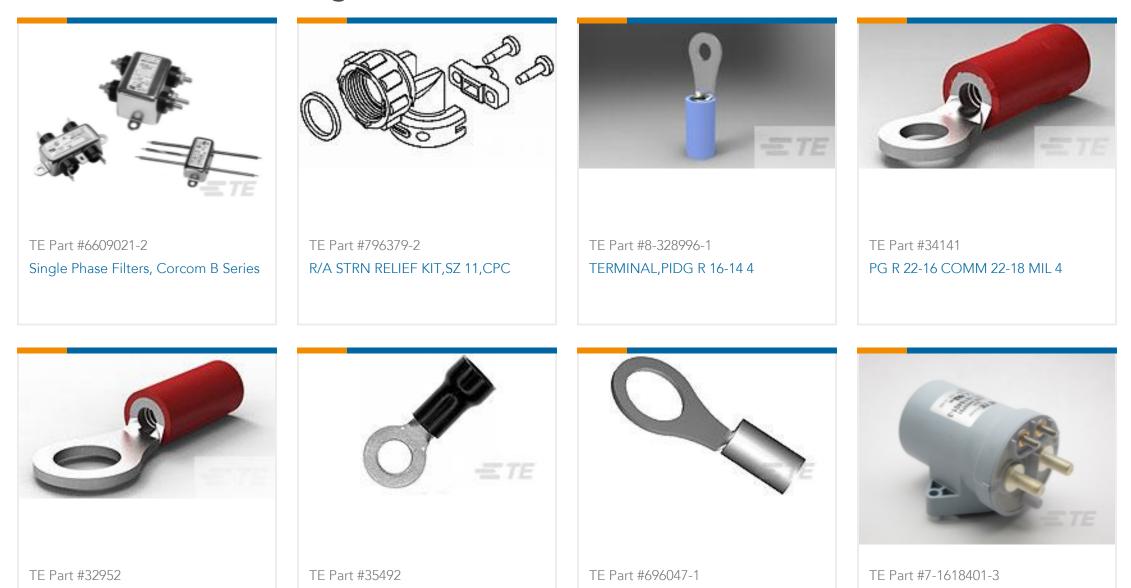

| PG R 22-16 COMM 22-18 MIL 10 | PG RING 12-10 1/4 STUD | TERMINAL PG 12-10, 8 | LEV200A4NAF01=Contactor, w/Coil Sup |
|------------------------------------|------------------------|----------------------|--|
| | | | |
| | | | |
| | | | |
| TE Part #RSM07-12-25S PLUG ASSY | | | |
| Documents | | | |

Product Drawings PG R 22-16 COMM 22-18 MIL 10

English

CAD Files

Customer View Model

ENG_CVM_CVM_2-34146-5_Y.2d_dxf.zip

English

3D PDF

Closed Ring Tongue Terminal, 22 – 16 AWG, #10 Stud Size, 5 mm [.197 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



3D

Customer View Model ENG_CVM_CVM_2-34146-5_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-34146-5_Y.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages PLASTI GRIP_QRG

English

Product Specifications Application Specification

English