


PLASTI-GRIP

TE Internal #: 2-342144-1 Closed Ring Tongue Terminal, 16 – 14 AWG, M5 Stud Size, 5.3 mm [.207 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP

View on TE.com >

Terminals & Splices > Ring Terminals

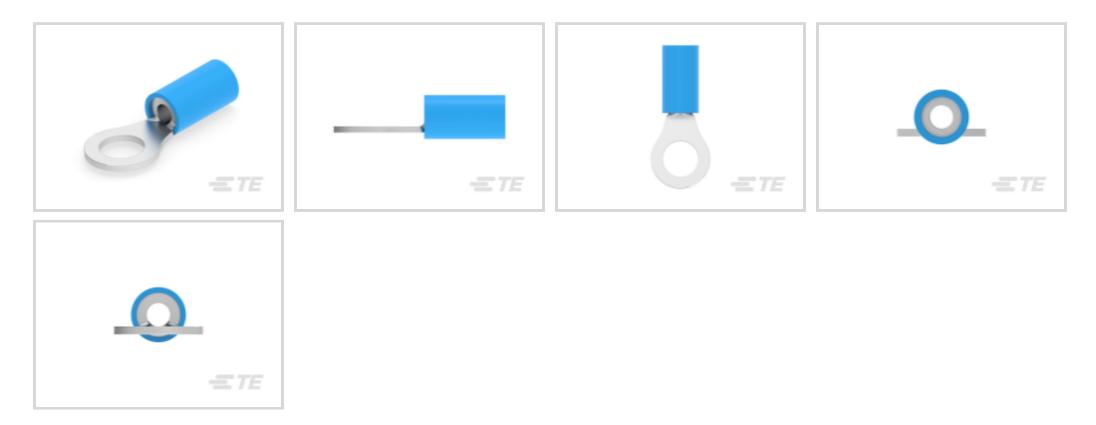

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 1 – 2.5 mm²

Stud Size: M5

Stud Diameter: 5.3 mm [.207 in]

Features

Product Type Features



Terminal Features	Sheared				
Ring Terminal Product Type	Closed Ring Tongue Terminal				
Stud Size	M5				
Sealable	No				
Wire Insulation Support Retention Type	Insulation Support				
Configuration Features					
Number of Holes	1				
Electrical Characteristics					
Voltage Rating	600 V				
Body Features					
Product Weight	.979 g				
Insulation Sleeve Color	Blue				
Stripe Color	Blue				
Contact Features					

Closed Ring Tongue Terminal, 16 – 14 AWG, M5 Stud Size, 5.3 mm [.207 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



Barrel TypeClosedTerminal OrientationStraightTerminal Plating MaterialTinWechanical AttachmentWithoutWire Insulation SupportWithoutDimensions1 - 2.5 mm²Vire Size1 - 2.5 mm²Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.118193 in]Compatible Insulation Diameter Range3 - 4.9 mm[.118193 in]Usage ConditionsPartially InsulatedOperating Turnsparenture Barren106 90(1201 #T)		
Terminal Plating MaterialTinMechanical AttachmentViteWire Insulation SupportWithoutDimensions1 - 2.5 mm²Vire Size1 - 2.5 mm²Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 - 4.9 mm[.118193 in]Usage ConditionsPartially Insulated	Barrel Type	Closed
Mechanical AttachmentWire Insulation SupportWithoutDimensionsJWire Size1 - 2.5 mm²Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 - 4.9 mm[.118193 in]Usage ConditionsInsulation Option	Terminal Orientation	Straight
Wire Insulation SupportWithoutDimensionsWire Size1 - 2.5 mm²Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 - 4.9 mm[.118193 in]Usage ConditionsInsulation OptionPartially Insulated	Terminal Plating Material	Tin
DimensionsWire Size1 – 2.5 mm²Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 – 4.9 mm[.118 – .193 in]Usage ConditionsInsulation OptionPartially Insulated	Mechanical Attachment	
Wire Size1 – 2.5 mm²Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 – 4.9 mm[.118 – .193 in]Usage ConditionsInsulation OptionPartially Insulated	Wire Insulation Support	Without
Stud Diameter5.3 mm[.207 in]Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 – 4.9 mm[.118 – .193 in]Usage ConditionsInsulation OptionPartially Insulated	Dimensions	
Tongue Thickness.79 mm[.031 in]Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 – 4.9 mm[.118 – .193 in]Usage ConditionsInsulation OptionPartially Insulated	Wire Size	$1 - 2.5 \text{ mm}^2$
Product Length22.4 mm[.882 in]Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 – 4.9 mm[.118 – .193 in]Usage ConditionsInsulation OptionPartially Insulated	Stud Diameter	5.3 mm[.207 in]
Compatible Insulation Diameter (Max)4.9 mm[.193 in]Compatible Insulation Diameter Range3 – 4.9 mm[.118 – .193 in]Usage ConditionsUsage ConditionsInsulation OptionPartially Insulated	Tongue Thickness	.79 mm[.031 in]
Compatible Insulation Diameter Range 3 – 4.9 mm[.118 – .193 in] Usage Conditions Insulation Option	Product Length	22.4 mm[.882 in]
Usage Conditions Insulation Option Partially Insulated	Compatible Insulation Diameter (Max)	4.9 mm[.193 in]
Insulation Option Partially Insulated	Compatible Insulation Diameter Range	3 – 4.9 mm[.118 – .193 in]
	Usage Conditions	
Operating Temperature Report	Insulation Option	Partially Insulated
Operating remperature kange 105 C[zz1 F]	Operating Temperature Range	105 °C[221 °F]
Operation/Application	Operation/Application	
Compatible With Wire Base Material Copper	Compatible With Wire Base Material	Copper

Compatible With Wire Plating Material

Tin

Industry Standards

Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	5000
Packaging Method	Tape Mounted
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)

Closed Ring Tongue Terminal, 16 – 14 AWG, M5 Stud Size, 5.3 mm [.207 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability


Halogen Content

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

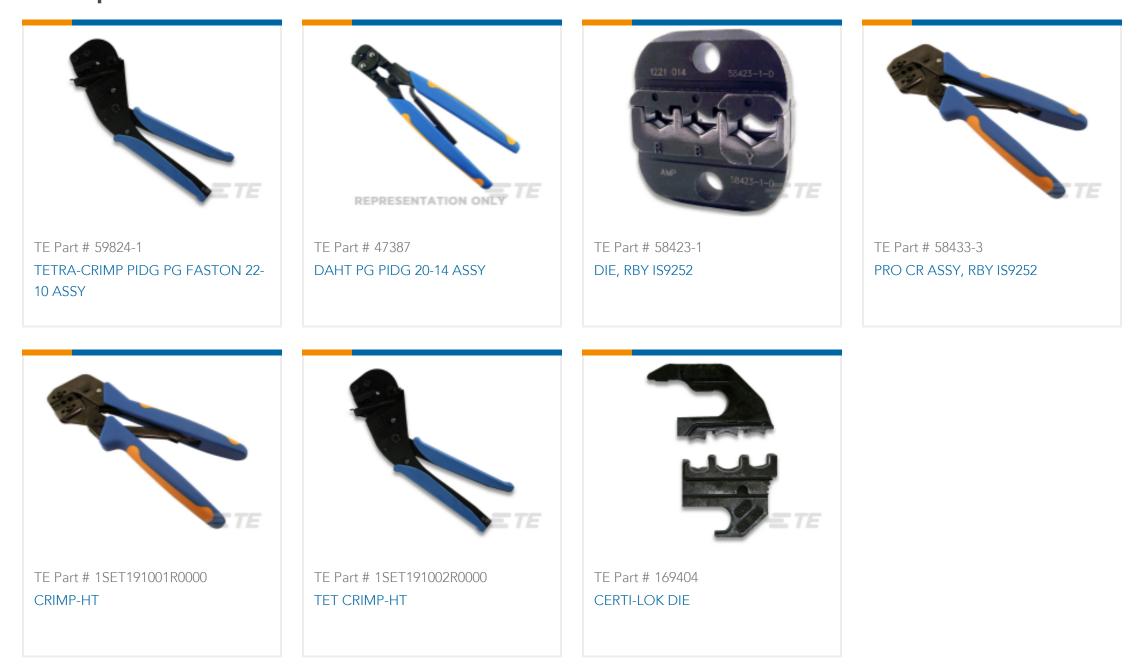

Also in the Series | PLASTI-GRIP

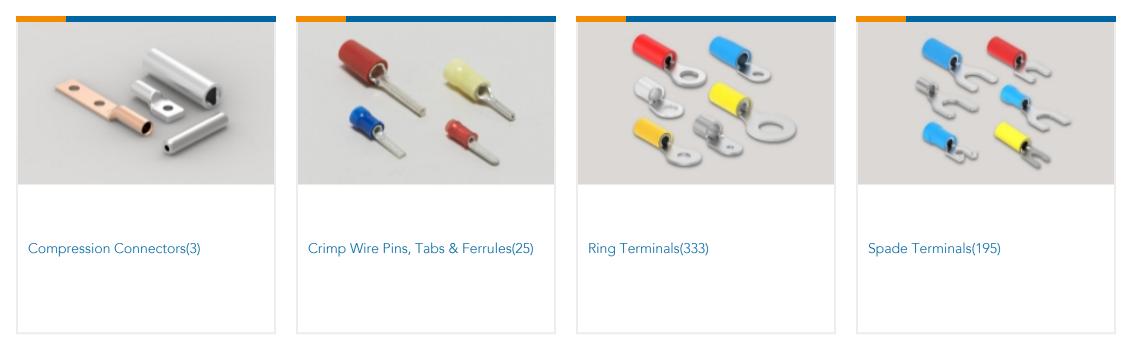


Closed Ring Tongue Terminal, 16 – 14 AWG, M5 Stud Size, 5.3 mm [.207 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP





Customers Also Bought

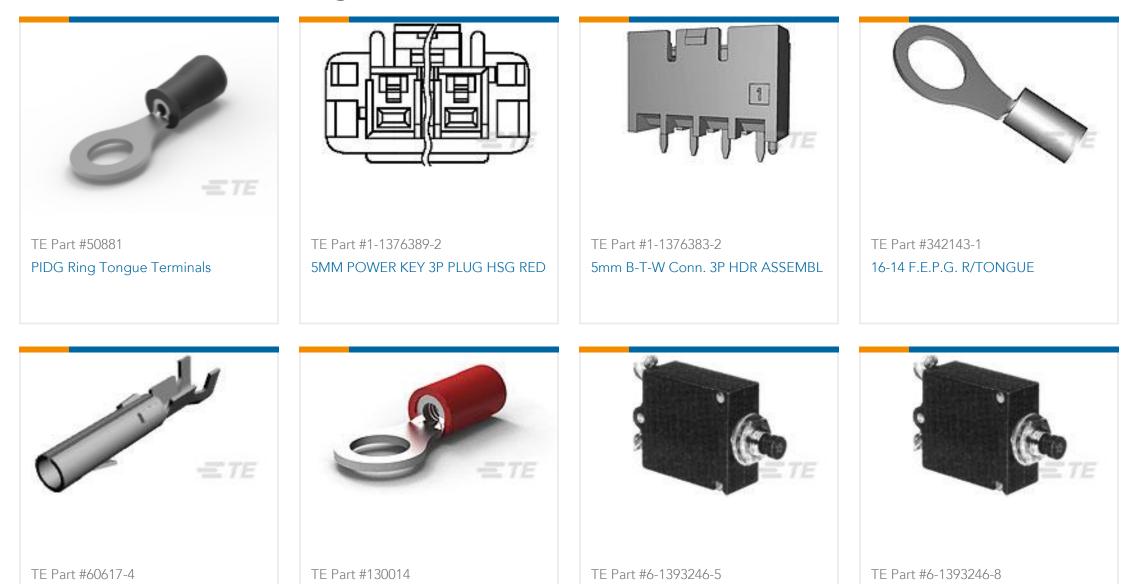

CMNL SOK PTPPHBZ L/P	TERM, R, PG, 22-16, M5	W23-X1A1G-10=W23/W31	W23-X1A1G-20=W23/W31	



Documents

Product Drawings TAPE MOUNTED 16-14 F.E. PLASTI

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-342144-1_N.2d_dxf.zip

Closed Ring Tongue Terminal, 16 – 14 AWG, M5 Stud Size, 5.3 mm [.207 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated, PLASTI-GRIP



English

Customer View Model ENG_CVM_CVM_2-342144-1_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-342144-1_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages RADIATION_RESISTANT_PRE-INSULATED_TERMINALS_SPLICES

English

Product Specifications Application Specification

English