


AMPLIMITE | AMPLIMITE HD-20

TE Internal #: 2-5747708-0 PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm

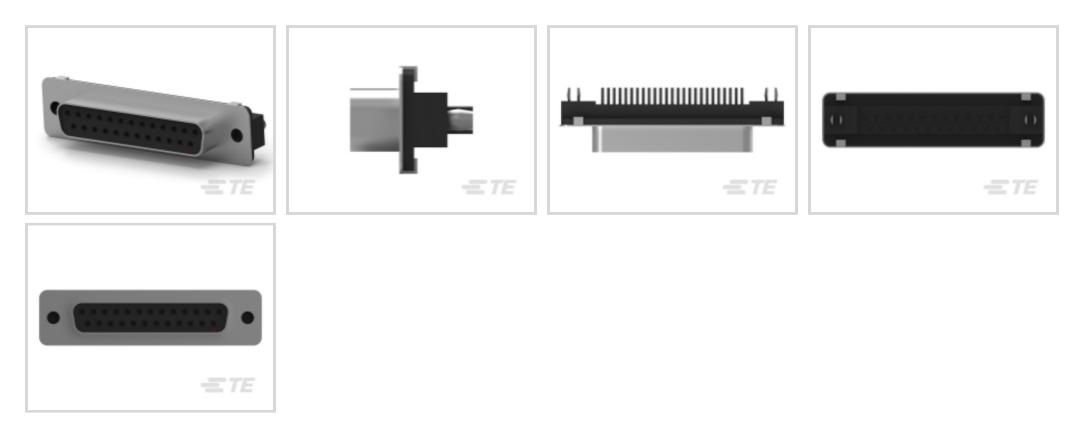

Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Number of Positions: 25

Centerline (Pitch): 2.77 mm [.109 in]

Number of Rows: 2

All D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm (64)

Features

Product Type Features

Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector Shell Size	3
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	25
Number of Rows	2
PCB Mount Orientation	Vertical
Body Features	
Assembly Process Feature Material	Brass
Insert Material	Brass

C For support call+1 800 522 6752

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20



Shield Plating Material	Tin
Shield Material	Steel
Shell Plating Material	Tin
Primary Product Color	Black
Connector Profile	Standard
ontact Features	
PCB Termination Area Plating Finish	Bright
	30 µin
Contact Mating Area Plating Material	Gold
Contact Underplating Material	Copper
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Shape & Form	Round
Contact Current Rating (Max)	6 A
ermination Features	
Round Termination Post & Tail Diameter	.66 mm[.026 in]
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
lechanical Attachment	
Assembly Process Feature Plating Material	Tin over Copper
Mounting Hole Diameter	3.07 mm[.121 in]
PCB Mount Retention	With
PCB Mount Retention Type	4-40 Retention Insert
Mating Retention	Without
Connector Mounting Type	Board Mount
ousing Features	
Shell Material	Carbon Steel
Housing Material	Thermoplastic
Centerline (Pitch)	2.77 mm[.109 in]
Centerline (Pitch) imensions	2.77 mm[.109 in]
	2.77 mm[.109 in] 1.57 mm[.062 in]

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20



Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Shielded	Yes
Circuit Application	Signal
Industry Standards	
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	10
Packaging Method	Tube
Other	
D-Shaped Connectors Comment	All receptacles are preloaded with size 20 DF posted socket contacts

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.7% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C
Product Compliance Disclaimer	

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | AMPLIMITE HD-20



Customers Also Bought

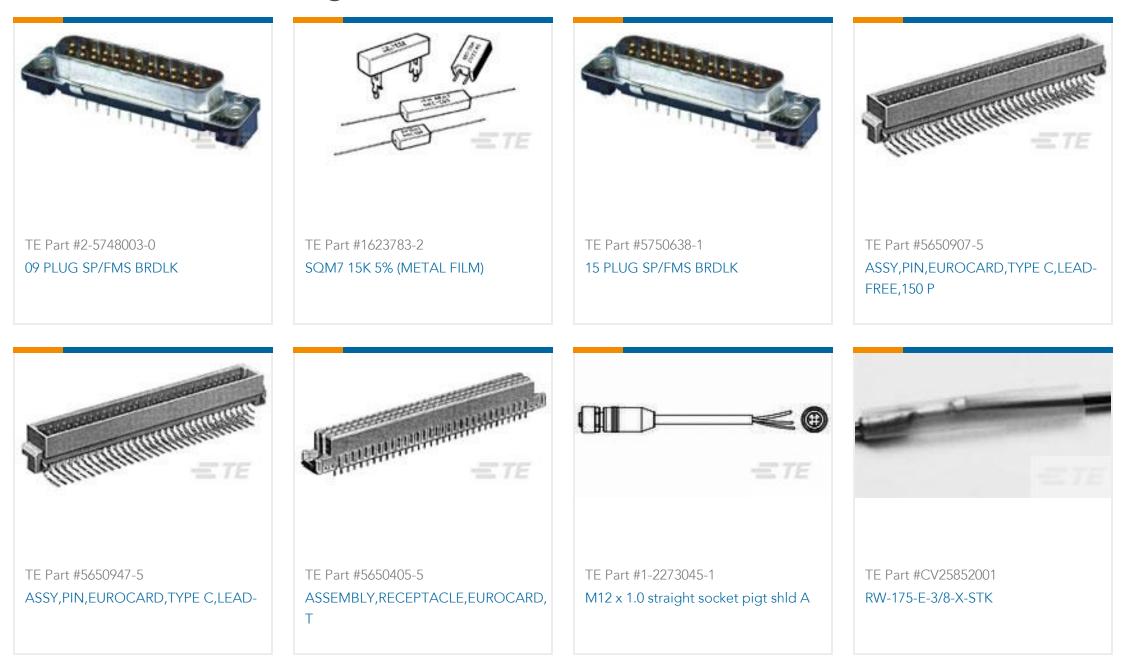

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20





Documents

Product Drawings 25 RCPT SP/FMS BRDLK

English

CAD Files

Customer View Model ENG_CVM_CVM_2-5747708-0_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-5747708-0_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-5747708-0_A.2d_dxf.zip

English

3D PDF

3D

3D PDF

English

Customer View Model

ENG_CVM_2-5747708-0_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_2-5747708-0_A.3d_igs.zip

English

Customer View Model ENG_CVM_2-5747708-0_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages AMPLIMITE Subminiature D Connectors - Straight Posted Connectors

English

Product Specifications Application Specification

English

& For support call+1 800 522 6752

PCB D-Sub Connectors, Receptacle, Board-to-Board, 25 Position, 2.77 mm [.109 in] Centerline, 2 Row, 3 Connector Shell Size, Round, AMPLIMITE HD-20



Product Environmental Compliance MD_2-5747708-0_01282017036_dmtec

English

MD_2-5747708-0_01282017036_dmtec

English

Agency Approvals

UL Report

English