2-794615-4 - ACTIVE

MATE-N-LOK | Micro MATE-N-LOK

TE Internal #: 2-794615-4 Rectangular Power Connectors, Housing, Plug, Wire-to-Panel / Wire-to-Wire, 24 Position, 3 mm [.118 in] Centerline, Wire & Cable, Micro MATE-N-LOK

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Housing Connector & Housing Type: Plug

Connector System: Wire-to-Panel, Wire-to-Wire

Number of Positions: 24

Centerline (Pitch): 3 mm [.118 in]

Features



Product Type Features

Rectangular Power Connector Type	Housing				
Connector & Housing Type	Plug				
Connector System	Wire-to-Panel, Wire-to-Wire				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	24				
Number of Rows	2				
Electrical Characteristics					
Operating Voltage	250 VDC				
Contact Features					
Contact Retention Within Housing	Without				
Contact Type	Pin				

Rectangular Power Connectors, Housing, Plug, Wire-to-Panel / Wire-to-Wire, 24 Position, 3 mm [.118 in] Centerline, Wire & Cable, Micro MATE-N-LOK



Termination Features

Termination Method to Wire & Cable	Crimp					
Mechanical Attachment						
Strain Relief	Without					
Mating Alignment Type	Polarization					
Mating Retention	With					
Mating Alignment	With					
Panel Mount Feature	With					
Panel Mount Feature Type	Locking Latch					
Mating Retention Type	Locking Tab					
Connector Mounting Type	Panel Mount					
Housing Features						
Centerline (Pitch)	3 mm[.118 in]					
Housing Color	Black					
Housing Material	Nylon					
Dimensions						

Panel Thickness (Recommended)

1.57 – 2.3 mm[.062 – .091 in]

Compatible Insulation Diameter (Max)	1.52 mm[.06 in]				
Connector Height	8.71 mm				
Product Length	36.85 mm				
Row-to-Row Spacing	3 mm[.118 in]				
Usage Conditions					
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]				
Operation/Application					
Circuit Application	Power & Signal				
Industry Standards					
CSA Rating	Certified, LR 7189				
UL Rating	Recognized				
Agency/Standard	CNR, USR				
Approved Standards	UL E28476, VDE 40005280				
UL Flammability Rating	UL 94V-0				
Glow Wire Rating	Standard Part - Not Glow Wire				

Rectangular Power Connectors, Housing, Plug, Wire-to-Panel / Wire-to-Wire, 24 Position, 3 mm [.118 in] Centerline, Wire & Cable, Micro MATE-N-LOK



Packaging Features

Packaging Quantity	200
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not applicable for solder process capability			

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series Micro MATE-N-LOK

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Panel / Wire-to-Wire, 24 Position, 3 mm [.118 in] Centerline, Wire & Cable, Micro MATE-N-LOK



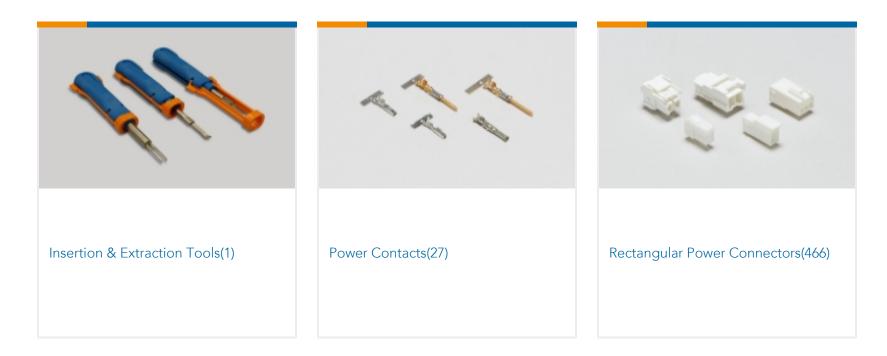

Customers Also Bought



02P MICRO MNL ASSY R/A HDR LF	PIN CONT 20-24 TIN PLATE L/P	JUNIOR-TIMER KONT	MB6/8.L6

TE Part #862779-000 382A012-15-CS-2067-0

Documents

Product Drawings PANEL MT DBL ROW HSG 24 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-794615-4_C1.2d_dxf.zip

Rectangular Power Connectors, Housing, Plug, Wire-to-Panel / Wire-to-Wire, 24 Position, 3 mm [.118 in] Centerline, Wire & Cable, Micro MATE-N-LOK



English

Customer View Model ENG_CVM_CVM_2-794615-4_C1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-794615-4_C1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

MICRO MATE-N-LOK CONNECTOR SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English