


AMP | Timer Connector System

TE Internal #: 2-967629-1 Housing for Male Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Natural, Signal, Panel Mount, Timer Connector System

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing

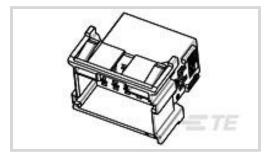

Connector System: Wire-to-Wire

Number of Positions: 18

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: No

All Timer Connector Housing (585)

Features

Product Type Features

Connector Shape

Mixed & Hybrid Connector

No

Rectangular

Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	No	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	18	
Number of Rows	3	
Electrical Characteristics		
Operating Voltage	28 VDC	
Nominal Voltage Architecture	12 V, 24 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Natural	
Connector & Keying Code	В	

Housing for Male Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Natural, Signal, Panel Mount, Timer Connector System



Contact Features

Contact Size	2.8mm	
Contact Type	Tab	
Mating Tab Width	2.8 mm[.11 in]	
Mechanical Attachment		
Terminal Position Assurance	No	
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Panel Mount	
Housing Features		
	PAGF	
Housing Features	PA GF 5 mm[.197 in]	
Housing Material		
Housing Features Housing Material Centerline (Pitch)		
Housing Features Housing Material Centerline (Pitch) Dimensions	5 mm[.197 in]	

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]	
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]	
Operation/Application		
Circuit Application	Signal	
Other		
Serviceable	No	
Connector Position Assurance Capable	No	
Product Compliance		
For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	

Housing for Male Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Natural, Signal, Panel Mount, Timer Connector System



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | Timer Connector System

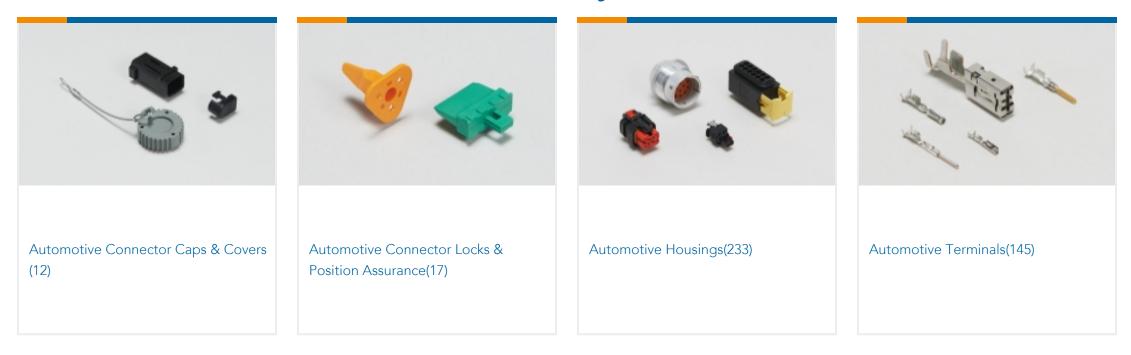

Housing for Male Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Natural, Signal, Panel Mount, Timer Connector System



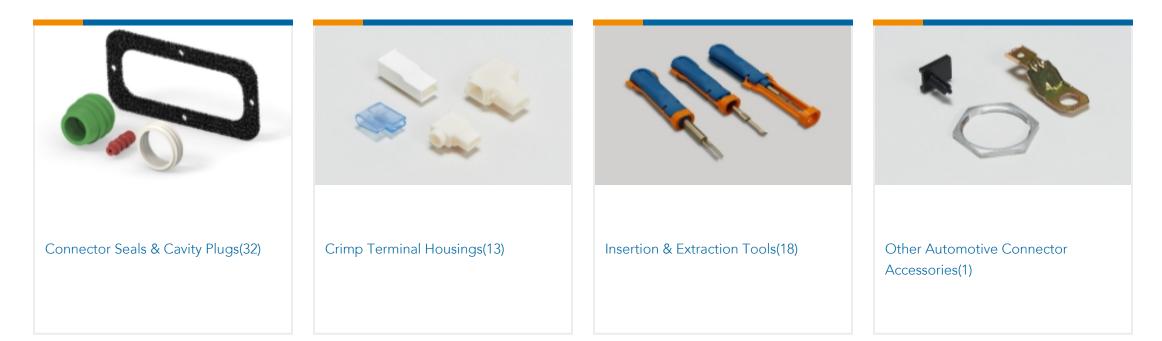

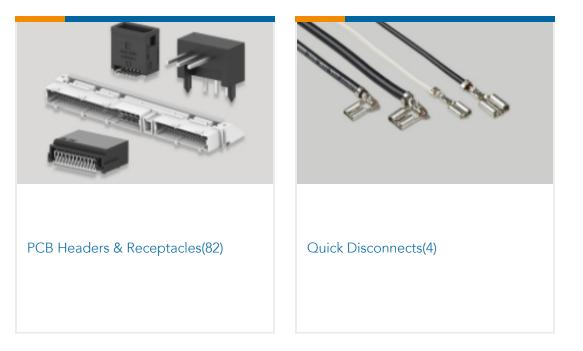

Customers Also Bought



V23079E1203B301	CT REC HSG 7P CRIMP TYPE WHITE	TAB HOUSING, 2.8MM, 18POS.	AMP MCP Unsealed Connector Housings
TE Part #2308251-1 GW H2 UH BOX LOWER COVER	TE Part #2333679-2 MINI-FUSE RETAINER	TE Part #2347248-1 FUSE+REL BOX ASSY HARD WIRED WUZHENG	TE Part #2295766-1 MINIFUSE HOLDER ASSEMBLY

Documents

Product Drawings

TAB HOUSING, 2.8MM, 18POS.

English

TAB HOUSING, 2.8MM, 18POS.

German

CAD Files

Customer View Model

ENG_CVM_CVM_2-967629-1_E.2d_dxf.zip

Housing for Male Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, Natural, Signal, Panel Mount, Timer Connector System



English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-967629-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-967629-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Timer Interconnection System

English

Product Specifications Application Specification

English