# 

### MEAS | MEAS FX29

TE Internal #: 20009605-07 TE Internal Description: FX292X-100A-0100-L Compact Compression Load Cell

#### View on TE.com >



Sensors > Force Sensors > Force Sensor Elements > Compact Compression Load Cell



Force Sensor Element Sensor Type: **OEM Compression Load Cells** 

Full Scale Range: 100 – 100 lbf

Operating Temperature Range: 0 – 50 °C [ 32 – 122 °F ]

Output Signal: 20 mV/V

Zero Shift in CTR: ±.05 % of FS

All Compact Compression Load Cell (47)

### Features

### Product Type Features

Force Sensor Element Sensor Type

OEM Compression Load Cells

**Electrical Characteristics** 

Supply Voltage	5 VDC
Full Scale Range	100 – 100 lbf
Signal Characteristics	
Output Signal	20 mV/V
Usage Conditions	
Operating Temperature Range	0-50 °C[32-122 °F]
Other	
Accuracy	±1 % of FS
Force Direction	Compression
Zero Shift in CTR	±.05 % of FS
Sensitivity Shift	±.05 % of FS

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

#### FX292X-100A-0100-L



EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Out of Scope	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.26% in component part) Decamethylcyclopentasiloxane (D5) (.12% in component part) Aticle Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Not Yet Reviewed for halogen content	
Solder Process Capability	Not reviewed for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

=TE
TE Part # CAT-FSE0006 Compact Compression Load Cell


Also in the Series | MEAS FX29

**L** For support call+1 800 522 6752



FX292X-100A-0100-L



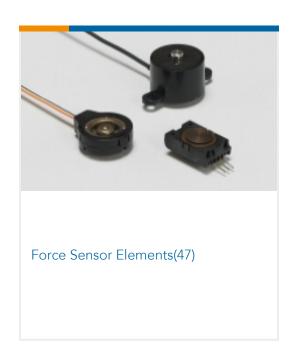

# Customers Also Bought



FC23 MV 2FT CABLE 500L	Pt1000, 1.2x4.0, Class B, PTFM102B1G0	TE 2500W 1R0 5% Bracket	PIN REC 20-24 .010X.646



# Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_20009605-07\_D.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_20009605-07\_D.3d\_igs.zip

FX292X-100A-0100-L

FX292X-100A-0100-L



English

Customer View Model ENG\_CVM\_CVM\_20009605-07\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages FX29 COMPRESSION LOAD CELL

English