


Power Double Lock

TE Internal #: 2005247-2 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > Glow Wire Power Double Lock Plug

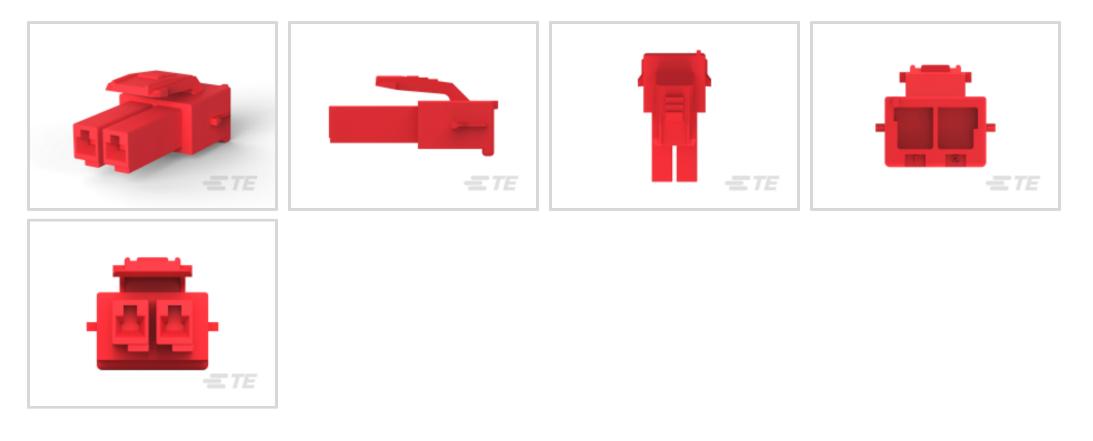

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 3.96 mm [.156 in]

All Glow Wire Power Double Lock Plug (55)

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded		
Rectangular Power Connector Type	Housing		
Connector & Housing Type	Plug		
Connector System	Wire-to-Wire		
Sealable	No		
Connector & Contact Terminates To	Wire & Cable		
Configuration Features			
Number of Positions	2		
Number of Power Positions	0		
Number of Signal Positions	0		
Number of Rows	1		
Electrical Characteristics			

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



Operating Voltage	50 VAC, 300 VAC
Contact Features	
Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Receptacle
ermination Features	
Termination Method to Wire & Cable	Crimp
lechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Red
Housing Material	PA 66
Jsage Conditions	
Operating Temperature Range	-30 – 65 °C[-22 – 149 °F]
Operation/Application	
Circuit Application	Power & Signal

Industry Standards

Agency/Standard	CNR, USR
Approved Standards	CSA/C22.2 No. 182.3-M1987, UL 1977
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)
Packaging Features	
Packaging Quantity	500
Packaging Method	Bag
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Halogen Content

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Power Double Lock

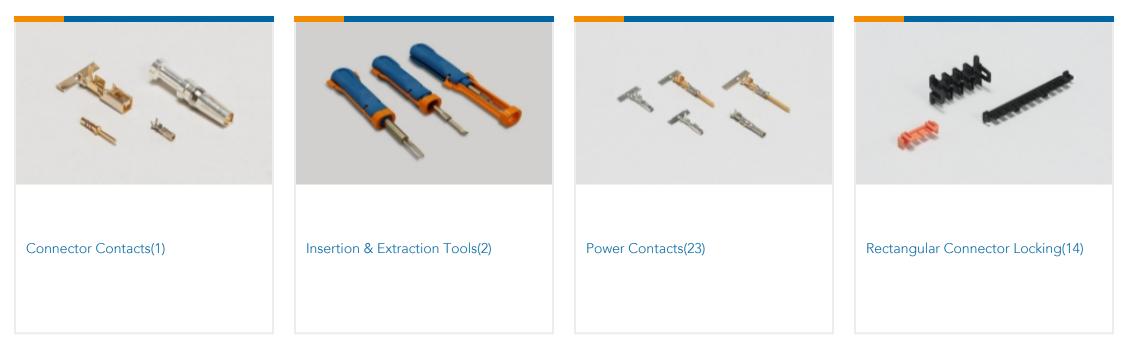

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock





Customers Also Bought



POWER DBL LOCK PLUG HSG 3P (GWT)	ATUM-9/3-0-SP	PDL 2P CAP 3.96 P/M(GWT) YEL	FG TERMINAL
TE Part #5-170063-2	TE Part #2-1743217-1		
CLUSTER REC	GAS VALVE 3P HSG GWT		

Documents

Product Drawings PDL 2P PLUG 3.96(GWT) RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2005247-2_B.2d_dxf.zip

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 2 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



English

Customer View Model ENG_CVM_CVM_2005247-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2005247-2_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance MD_2005247-2_120120152034_dmtec

English

MD_2005247-2_120120152034_dmtec

English