



TE Internal #: 2008625-2


Power Contacts, Contact, 250 VAC, 250 VDC, Gold, 22 – 18 AWG

Wire Size, .823 – 3.3 mm² Wire Size, 1624 – 6529 CMA Wire Size,

Wire & Cable, Crimp

[View on TE.com >](#)

Connectors > Power Connectors > Power Contacts

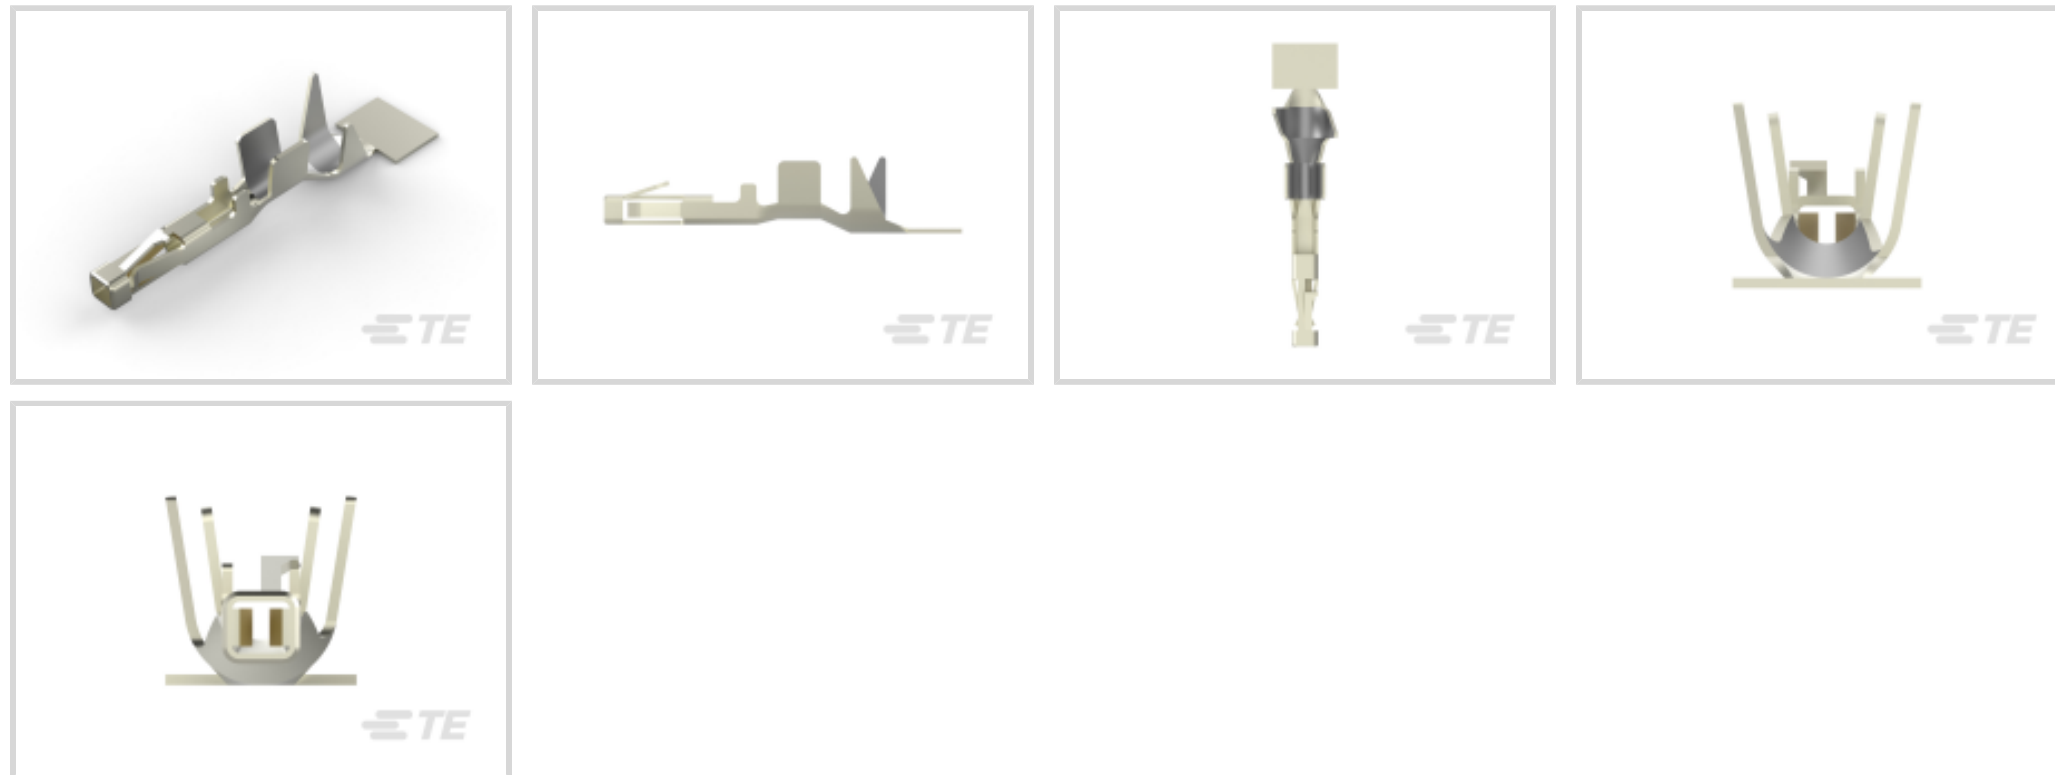

Power Contact Type: **Contact**

Operating Voltage: **250 VDC**

Contact Mating Area Plating Material: **Gold**

Wire Size: **22 – 18 AWG**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Power Contact Type	Contact
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Barrel Type	Open
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	5 A
Contact Type	Receptacle
Contact Retention Within Housing	With
Mating Square Post Dimension	.64 mm[.025 in]
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	.38 μm[15 μin]



Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	1.27 – 2.54 μm[50 – 100 μin]
Wire Contact Termination Area Plating Material	Tin
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 – 2.54 μm[50 – 100 μin]

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
Wire Insulation Support	With

Dimensions

Wire Size	1624 – 6529 CMA
Compatible Insulation Diameter Range	1.5 – 2.79 mm[.059 – .109 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

	Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <p>TE Part # 2-2266495-1 OCEAN-2.0-APPLICATOR-S-062F1100</p>	 <p>TE Part # 2-2266495-2 OCEAN-2.0-APPLICATOR-S-062F1100A</p>	 <p>TE Part # 2266495-1 OCEAN-2.0-APPLICATOR-S-062F1100</p>	 <p>TE Part # 2266495-2 OCEAN-2.0-APPLICATOR-S-062F1100A</p>
 <p>TE Part # 7-2266495-1 OCEAN-2.0-APPLICATOR-S-062F1100</p>	 <p>TE Part # 7-2266495-2 OCEAN-2.0-APPLICATOR-S-062F1100A</p>	 <p>KIT REPRESENTATION ONLY</p> <p>TE Part # 7-2266495-7 OCEAN_2.0_SPARE_PART_KIT-062F1100</p>	

Customers Also Bought

 <p>TE Part #6609052-2 10VN1=F7416 S0</p>	 <p>TE Part #52934 TERMINAL,PIDG SPR SPD 16-14 5</p>	 <p>TE Part #3-520412-2 ULTRA-FAST 187 ASY REC 16-14 AWG TPBR</p>	 <p>TE Part #2008571-2 2 POS MICRO MNL, TOP LATCH, BL TPBR</p>
--	--	--	---

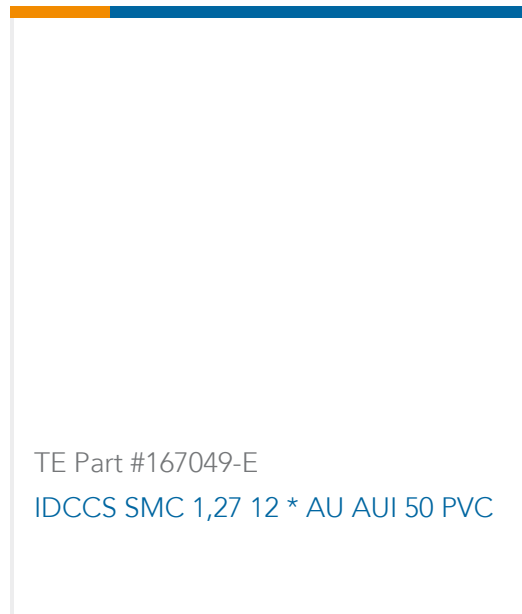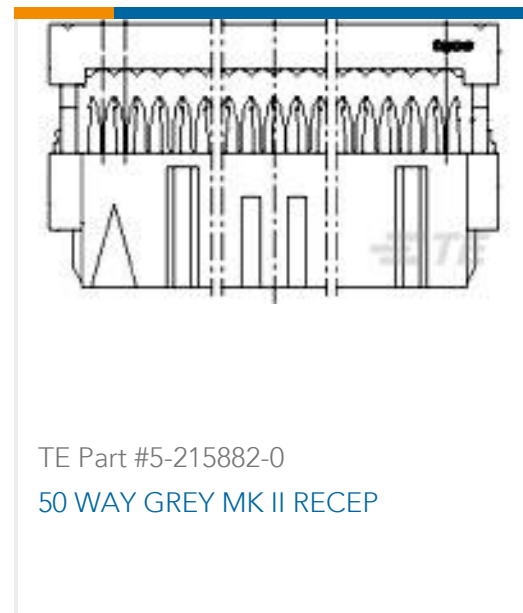

Documents

Product Drawings

Socket Micro MNL, GOLD 22-18

English

CAD Files

Customer View Model

[ENG_CVM_CVM_2008625-2_A.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2008625-2_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2008625-2_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

MICRO MATE-N-LOK CONNECTOR SYSTEM

English

Product Specifications

Application Specification

English

Product Environmental Compliance

[MD_2008625-2_0201201840_dmtec](#)

2008625-2

Power Contacts, Contact, 250 VAC, 250 VDC, Gold, 22 – 18 AWG Wire Size, .823 – 3.3 mm² Wire Size, 1624 – 6529 CMA Wire Size, Wire & Cable, Crimp



English

[MD_2008625-2_0201201840_dmtec](#)

English