
TE Internal #: 2016689-3 SMPM Cable Assembly, .984 ft [.3 m], Blue Cable, 0 – 67 GHz Operating Frequency, 50 Ω , FEP, 28 – 30 AWG, .102 in [2.6 mm] Diameter, SMPM Plug



View on TE.com >

Cable Assemblies > RF Cable Assemblies

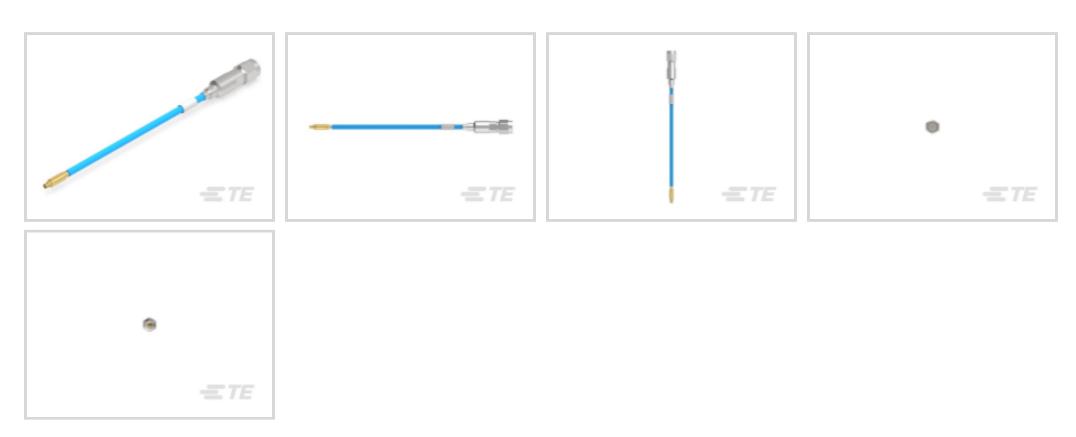

Connector Type (End A): SMPM Plug

Jacket Material: FEP

Cable Assembly Length: .3 m [.984 ft]

Cable Color: Blue

Operating Temperature Range: -45 - 85 °C [-49 - 185 °F]

Features

Product Type Features

| Coax Cable Type | SUPERFLEX |
|----------------------------|--------------------------|
| Connector Type (End A) | SMPM Plug |
| Connector Type (End B) | 1.85mm Series RF CA Plug |
| Cable Assembly Type | SMPM |
| Electrical Characteristics | |

| Insulation Resistance | 500 ΜΩ |
|-----------------------|--------|
| Operating Voltage | 150 V |
| Impedance | 50 Ω |

Signal Characteristics

| Velocity of Propagation | 74% | |
|-------------------------|-----|--|
|-------------------------|-----|--|

Body Features

| Conductor Plating Material | Silver |
|----------------------------|--------|
| Strain Relief Type | HST |
| Shield Plating Material | Silver |



| Shield Material | Copper Wire |
|--------------------------------------|---------------------------|
| Body Plating Material | Stainless Steel |
| Conductor Material | Copper |
| Jacket Material | FEP |
| Cable Color | Blue |
| Contact Features | |
| Center Contact Plating | Gold |
| Contact Mating Area Plating Material | Gold |
| Ferrule Plating Material | Gold |
| Ferrule Material | Copper |
| Contact Base Material | Beryllium Copper Alloy |
| Dimensions | |
| Wire Size | 28 – 30 AWG |
| Outside Cable Diameter | 2.6 mm[.102 in] |
| Usage Conditions | |
| Operating Temperature Range | -45 – 85 °C[-49 – 185 °F] |
| Operation/Application | |
| Shielded | Yes |
| Operating Frequency | 0 – 67 GHz |
| Other | |

Product Compliance

Cable Assembly Length

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|---|---|
| EU ELV Directive 2000/53/EC | Not Yet Reviewed |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (4.35% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |

.3 m[.984 ft]



Halogen Content

Low Bromine/Chlorine - Br and Cl < 900

ppm per homogenous material. Also BFR

/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts







Documents

Product Drawings

40GHZ,SMPM TO 2.92,M-M,L300

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2016689-3_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2016689-3_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2016689-3_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

SMPM Cable Assembly, .984 ft [.3 m], Blue Cable, 0 – 67 GHz Operating Frequency, 50 Ω , FEP, 28 – 30 AWG, .102 in [2.6 mm] Diameter, SMPM Plug



Product Specifications

Product Specification

English