
201911-1 ~ ACTIVE

AMP | AMP M Series

TE Internal #: 201911-1 Rectangular Connector Hardware, Jackscrew Kit, Turnable, Male Jackscrew, 75 / 28 / 104 Position, -55 – 150 °C [-67 – 302 °F], AMP M Series

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Accessories > Rectangular Connector Hardware

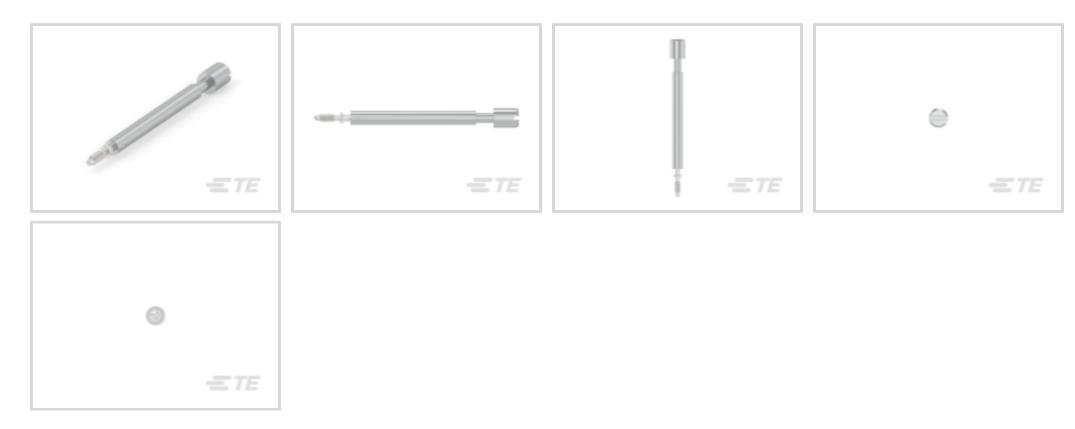

Connector Hardware Type: Jackscrew Kit

Jackscrew Type: Turnable

Jackscrew Style: Male

Number of Positions: 12, 28, 42, 50, 75, 104

Operating Temperature Range: -55 – 150 °C [-67 – 302 °F]

Features



Configuration Features

Number of Positions	12, 28, 42, 50, 75, 104
Body Features	
Thread Lead Type	Double
Primary Product Material	Stainless Steel, Zinc Alloy
Mechanical Attachment	
Product Plating Finish	Clear Chromate
Strain Relief	Without
Mounting Hardware	Jackscrew Tip Female and Spirol Pin
Thread Size	6-32
Connector Hardware Type	Jackscrew Kit
Jackscrew Type	Turnable
Jackscrew Style	Male
Dimensions	
Product Width	7.92 mm[.312 in]

C For support call+1 800 522 6752

Rectangular Connector Hardware, Jackscrew Kit, Turnable, Male Jackscrew, 75 / 28 / 104 Position, -55 – 150 °C [-67 – 302 °F], AMP M Series



Product Length	68.66 mm[2.703 in]
Product Height	7.92 mm[.312 in]
Usage Conditions	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Packaging Features	
Packaging Quantity	100
Packaging Method	Bag
Other	
Connector Accessory Comment	Two required., Use turnable jackscrews on mating housings when mating to grounding block.
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023

(235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Rectangular Connector Hardware, Jackscrew Kit, Turnable, Male Jackscrew, 75 / 28 / 104 Position, -55 – 150 °C [-67 – 302 °F], AMP M Series





Also in the Series AMP M Series







Customers Also Bought



Rectangular Connector Hardware, Jackscrew Kit, Turnable, Male Jackscrew, 75 / 28 / 104 Position, -55 – 150 °C [-67 – 302 °F], AMP M Series







Documents

Product Drawings
JACKSCREW KIT

English

CAD Files Customer View Model ENG_CVM_201911-1_J1.3d_igs.zip

English

Customer View Model

ENG_CVM_201911-1_J1.3d_stp.zip

English

Customer View Model

ENG_CVM_201911-1_J1.2d_dxf.zip

English

3D PDF

English

Customer View Model

ENG_CVM_CVM_201911-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_201911-1_D.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_201911-1_D.2d_dxf.zip

English

3D PDF

3D

C For support call+1 800 522 6752

Rectangular Connector Hardware, Jackscrew Kit, Turnable, Male Jackscrew, 75 / 28 / 104 Position, -55 – 150 °C [-67 – 302 °F], AMP M Series



By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English

AMP TURNABLE JACK SCREW SPECIFICATIONS AND ASSEMBLY INSTRUCTIONS

English