

AMP | AMP Type III+

TE Internal #: 202236-7


Power Contacts, Contact, Gold, Wire & Cable, Solder Tab, Power & Signal, Pin, -55 – 150 °C [-67 – 302 °F], Brass, Bright, Tin-Lead, AMP

Type III+

View on TE.com >



Connectors > Power Connectors > Power Contacts > Pin and Socket Contacts, Type III, LP

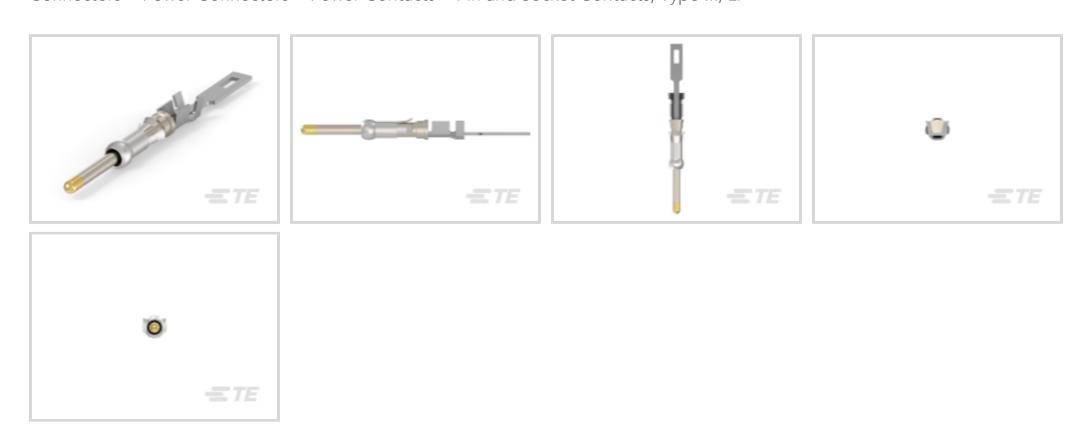

Power Contact Type: Contact

Contact Mating Area Plating Material: Gold

Connector & Contact Terminates To: Wire & Cable
Termination Method to Wire & Cable: Solder Tab

Contact Current Rating (Max): 13 A

All Pin and Socket Contacts, Type III, LP (53)

Features

Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Contact Features	
Contact Size	Size 16
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	13 A
Contact Type	Pin
Contact Retention Within Housing	With
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]



Wire Contact Termination Area Plating Material	Tin-Lead
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Termination Features	
Termination Method to Wire & Cable	Solder Tab
Mechanical Attachment	
Wire Insulation Support	Without
Usage Conditions	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	1000
Packaging Method	Carton
Other	
Power Connectors Comment	These contacts can be used in MultiMate contact positions of all connector housings.

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

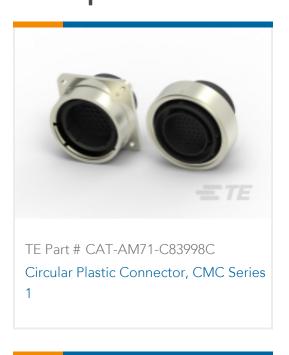




One-Piece Connector, Sealed, CPC

Series 1















Also in the Series | AMP Type III+






Customers Also Bought



















Documents

Product Drawings

III+PIN,SOLTAB,30AU>10,LP,SN

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_202236-7_Y.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_202236-7_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_202236-7_Y.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_202236-7_T.2d_dxf.zip

English

Customer View Model

ENG_CVM_202236-7_T.3d_igs.zip

English

Customer View Model

ENG_CVM_202236-7_T.3d_stp.zip

English

Power Contacts, Contact, Gold, Wire & Cable, Solder Tab, Power & Signal, Pin, -55 – 150 °C [-67 – 302 °F], Brass, Bright, Tin-Lead, AMP Type III+



By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Signal Contacts

English

Product Specifications

Application Specification

English

Product Environmental Compliance

MD_202236-7_12112013729_dmtec

English

MD_202236-7_12112013729_dmtec

English