202237-4 - ACTIVE

AMP | AMP Type III+

TE Internal #: 202237-4 Power Contacts, Contact, Tin-Lead, Wire & Cable, Crimp, Power & Signal, Socket, -55 – 90 °C [-67 – 194 °F], Brass, Tin-Lead, Straight, AMP Type III+

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact

Contact Mating Area Plating Material: Tin-Lead

Connector & Contact Terminates To: Wire & Cable

Termination Method to Wire & Cable: Crimp

Contact Current Rating (Max): 13 A

Features

Connectivity

Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Contact Features	
Contact Size	Size 16
Contact Mating Area Plating Material	Tin-Lead
Contact Current Rating (Max)	13 A
Contact Type	Socket
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Material	Tin-Lead
Contact Orientation	Straight
Contact Underplating Material	Nickel

C For support call+1 800 522 6752

Power Contacts, Contact, Tin-Lead, Wire & Cable, Crimp, Power & Signal, Socket, -55 – 90 °C [-67 – 194 °F], Brass, Tin-Lead, Straight, AMP Type III+



Contact Underplating Material Thickness	.76 μm[30 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	Without
Usage Conditions	
Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	100
Packaging Method	Bag
Other	
Power Connectors Comment	These contacts can be used in MultiMate contact positions of all connector housing

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (13% in Component Part) Atticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers an based on the information they provided. This information is subject to change	

Power Contacts, Contact, Tin-Lead, Wire & Cable, Crimp, Power & Signal, Socket, -55 – 90 °C [-67 – 194 °F], Brass, Tin-Lead, Straight, AMP Type III+




EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | AMP Type III+



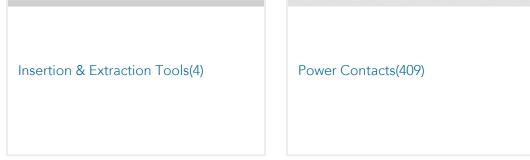

Customers Also Bought



Power Contacts, Contact, Tin-Lead, Wire & Cable, Crimp, Power & Signal, Socket, -55 – 90 °C [-67 – 194 °F], Brass, Tin-Lead, Straight, AMP Type III+







Documents

Product Drawings III+ SKT,SOLTAB,TIN-LEAD,SMPAC

English

CAD Files 3D PDF

English

Customer View Model ENG_CVM_202237-4_T.2d_dxf.zip

English

Customer View Model

ENG_CVM_202237-4_T.3d_igs.zip

English

Customer View Model

ENG_CVM_202237-4_T.3d_stp.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_202237-4_W.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_202237-4_W.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_202237-4_W.3d_stp.zip

English

S For support call+1 800 522 6752

Power Contacts, Contact, Tin-Lead, Wire & Cable, Crimp, Power & Signal, Socket, -55 – 90 °C [-67 – 194 °F], Brass, Tin-Lead, Straight, AMP Type III+



By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

English