

# AMP | AMPSEAL 16 TE Internal #: 2040594-3 Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16

#### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings



Connector System: Wire-to-Wire

Number of Positions: 4

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5.3 mm [.209 in ]

Sealable: Yes

### All AMPSEAL 16 Housings (226)

**TE** 

# Features

## **Product Type Features**

Mixed & Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Number of Positions	4	
Number of Rows	2	
Body Features		
Primary Product Color	Black	
Contact Features		

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



Contact Size	Size 16	
Contact Type	Pin	
Mating Pin Diameter	1.5 mm[.059 in]	
Mechanical Attachment		
Terminal Position Assurance	No	
Mating Alignment Type	Polarizing Tab	
Mating Alignment	With	
Housing Features		
Centerline (Pitch)	5.3 mm[.209 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 81 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][170 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]	
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]	
Industry Standards		
Degree of Protection	IP67	
UL Flammability Rating	UL 94HB	

# Packaging Features

Packaging Quantity	240
Packaging Method	Box
Other	
Connector Position Assurance Capable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



TE Part # CAT-AM7801-B128 AMPSEAL 16 Connectors Backshell



TE Part # CAT-AM7801-CH8172 AMPSEAL 16 Housings




TE Part # CAT-AM7801-T273 Contacts: Size 16, 13A



TE Part # 1924487-3 MOUNTING CLIP, AMPSEAL 16


= TE
TE Part # 776363-1 SEALING PLUG, SZ 16 CAVITY


# Also in the Series AMPSEAL 16

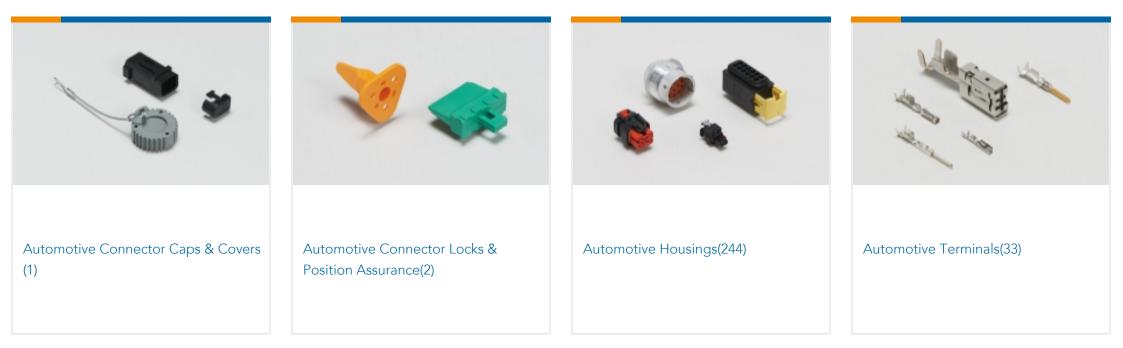

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



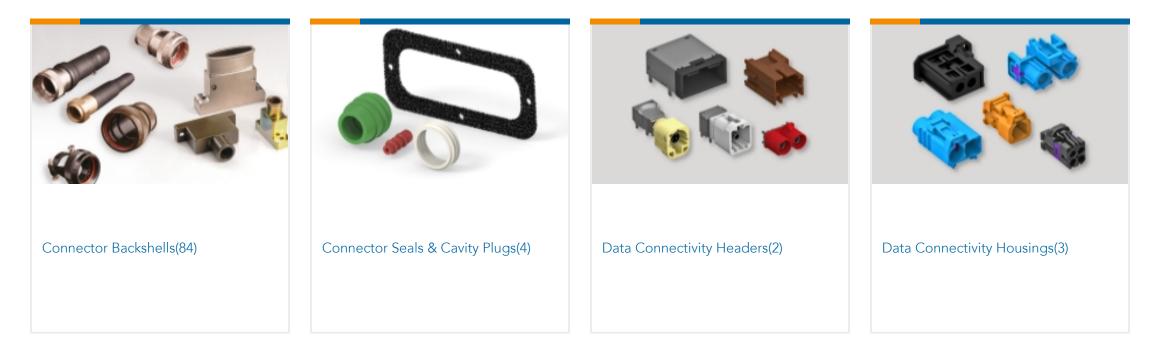

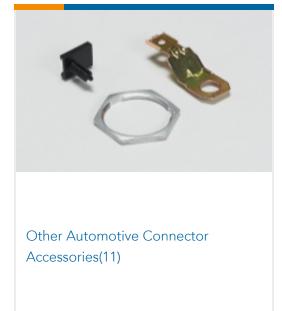

# Customers Also Bought



TE Part #2112302-1 PROTECTION CAP, FOR RE GROUP D	C.HSG AMPSEAL 16 Housings	TE Part #1326460-1 ASSY, PLUG, 3P SEALED, 2.8MCP	TE Part #1599052-1 FF 250 TAB 4.0-6.0 MM2 PTPPHBZ	
			E TE	
TE Part #1-1414121-0 V23136B1001X051-EV-CBOX	TE Part #1746089-1 COVER V	TE Part #2292937-1 2POS,1.2X0.6,TAB HSG ASSY,SLD, COD A	TE Part #5-965907-5 MQS SOCKET CONTACT SWS	

TE Part #1718969-1 LOCKING PLATE

# Documents

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



## Product Drawings SEAL CAP HSG 4P, AMPSEAL16 SEA

Japanese

## **CAD** Files

Customer View Model ENG\_CVM\_CVM\_2040594-3\_D.2d\_dxf.zip

English

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_2040594-3\_D.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2040594-3\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

Product Specifications AMPSEAL SEAL CAP

Japanese

### Product Specification

Japanese

Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English