



Connectors > D-Shaped Connectors > D-Sub Connectors > Box Mount D-Sub Connectors



Connector & Housing Type: **Receptacle**  
Connector System: **Cable-to-Cable**  
Number of Positions: **104**  
Power/Signal/Coax Combination: **No**  
Connector Shell Size: **6**

Features

Product Type Features

|                                   |                |
|-----------------------------------|----------------|
| Connector & Housing Type          | Receptacle     |
| Connector System                  | Cable-to-Cable |
| Connector Shell Size              | 6              |
| Sealable                          | No             |
| Connector & Contact Terminates To | Wire & Cable   |

Configuration Features

|                               |     |
|-------------------------------|-----|
| Number of Positions           | 104 |
| Power/Signal/Coax Combination | No  |

Body Features

|                                   |                 |
|-----------------------------------|-----------------|
| Rear Shell Material               | Steel           |
| Rear Shell Plating Material       | Cadmium         |
| Front Shell Plating Material      | Cadmium         |
| Mating Retention Feature Material | Stainless Steel |
| Front Shell Material              | Steel           |

Contact Features

|                                      |              |
|--------------------------------------|--------------|
| Contact Mating Area Plating Material | Gold         |
| Contact Base Material                | Copper Alloy |
| Contact Type                         | Socket       |
| Contact Size                         | Size 22      |



|                              |     |
|------------------------------|-----|
| Contact Current Rating (Max) | 5 A |
|------------------------------|-----|

Mechanical Attachment

|                        |                  |
|------------------------|------------------|
| Mounting Hole Diameter | 3.17 mm[.125 in] |
| Mating Alignment       | Without          |

Housing Features

|                    |                 |
|--------------------|-----------------|
| Centerline (Pitch) | 2.29 mm[.09 in] |
|--------------------|-----------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 125 °C[-67 – 257 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Packaging Features

|                  |         |
|------------------|---------|
| Packaging Method | Package |
|------------------|---------|

Other

|                             |  |
|-----------------------------|--|
| D-Shaped Connectors Comment | "F" is stamped on connectors following M24308 part number as required. "F" designates cadmium shell plating., Size 22 sockets supplied with receptacles are loose piece. |
|-----------------------------|--|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|   |  |
|---|--|
| EU RoHS Directive 2011/65/EU                  | Not Compliant  |
| EU ELV Directive 2000/53/EC                   | Not Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JAN 2023 (233)<br>SVHC > Threshold:<br>Pb (.6% in Componet part)<br>Cd (1% in Componet part)<br><b>Article Safe Usage Statements:</b><br>Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content                               | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.   |
| Solder Process Capability                     | Not applicable for solder process capability   |



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 204351-1  
SZ 22 SOCKET CONTACT



TE Part # 91067-1  
INSERTION/EXTRACTION TOOL

Customers Also Bought



TE Part #217675-000  
55PC0811-22-5LL-CS2502



TE Part #804527-000  
55PC1121-22-2/6-9CS2502



TE Part #868725-000  
55A1112-24-9-9CS2275



TE Part #299209-000  
55A1122-16-9/96-9CS2275



TE Part #123421-000  
55A1122-20-9/96-9CS2275




TE Part #247165-000  
55A3112-20-9CS2275



TE Part #398683-000  
55A3112-22-9CS2275

TE Part #1618385-6  
MAP200HRXFD01 = RELAY, SPST-NO,  
28V CUTT

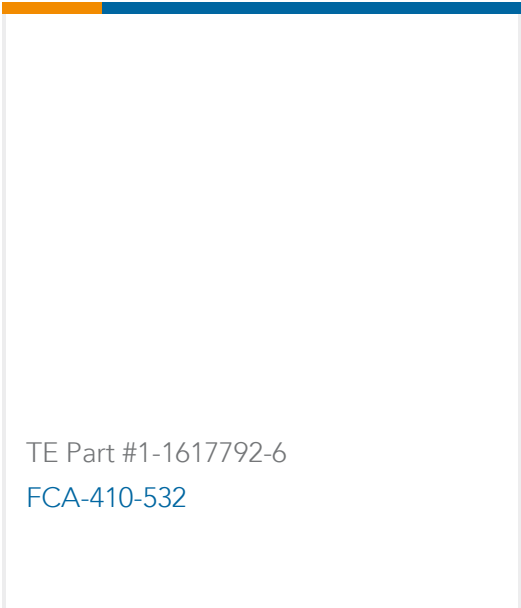

Documents

Product Drawings

RECEPT ASSY,104 POSN,AMPLIMITE

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_204522-2\_L.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_204522-2\_L.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_204522-2\_L.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1308940\_Sec8\_amplimite

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English