211401-8 - ACTIVE

AMP | AMP CPC

TE Internal #: 211401-8 Circular Power Connectors, Housing, 600 VDC, Wire-to-Wire, 7 Position, Wire & Cable, Receptacle, Pin, Power & Signal, Black, All Plastic, AMP CPC

View on TE.com >

Connectors > Power Connectors > Circular Power > Circular Power Connectors



Connector Product Type: Housing

Operating Voltage: 600 VDC

Connector System: Wire-to-Wire

Number of Positions: 7

Sealable: No

Features

E T E connectivity

Product Type Features

Connector Product Type	Housing
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Receptacle
Circular Connector Shell Type	All Plastic
Configuration Features	
Reverse Numbering	Without
Reverse Numbering Number of Positions	Without 7
Number of Positions	7
Number of Positions Number of Power Positions	7
Number of Positions Number of Signal Positions	7

C For support call+1 800 522 6752

Circular Power Connectors, Housing, 600 VDC, Wire-to-Wire, 7 Position, Wire & Cable, Receptacle, Pin, Power & Signal, Black, All Plastic, AMP CPC



Reverse GenderNoContact TypePinContact ProtectionWithMechanical AttachmentWithMating Alignment TypeKeyedMating Alignment TypeFlange with Mounting HolesPanel Mount Feature TypeFlange with Mounting HolesMating Retention TypeThreaded CouplingThread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithPanel Mount FeatureStraightHousing FeaturesBody OrientationHousing ColorStraight		
Contact ProtectionWithMechanical AttachmentKeyedMating Alignment TypeKeyedMating AlignmentWithPanel Mount Feature TypeFlange with Mounting HolesMating Retention TypeThreaded CouplingThread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithBody OrientationStraight	Reverse Gender	No
Machanical Attachment Mating Alignment Type Keyed Mating Alignment With Panel Mount Feature Type Flange with Mounting Holes Mating Retention Type Threaded Coupling Thread Size 3/4 - 20 UNEF-2A Polarization Code A Connector Mounting Type Panel Mount Mating Retention With Panel Mount Feature With Panel Mount Feature Straight	Contact Type	Pin
Mating Alignment TypeKeyedMating AlignmentWithPanel Mount Feature TypeFlange with Mounting HolesMating Retention TypeThreaded CouplingThread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithBody OrientationStraight	Contact Protection	With
Mating AlignmentWithPanel Mount Feature TypeFlange with Mounting HolesMating Retention TypeThreaded CouplingThread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithBody OrientationStraight	Mechanical Attachment	
Panel Mount Feature TypeFlange with Mounting HolesMating Retention TypeThreaded CouplingThread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithBody OrientationStraight	Mating Alignment Type	Keyed
Mating Retention TypeThreade CouplingThread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithBody OrientationStraight	Mating Alignment	With
Thread Size3/4 - 20 UNEF-2APolarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithBody Orientation	Panel Mount Feature Type	Flange with Mounting Holes
Polarization CodeAConnector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithHousing FeaturesStraight	Mating Retention Type	Threaded Coupling
Connector Mounting TypePanel MountMating RetentionWithPanel Mount FeatureWithHousing FeaturesBody OrientationStraight	Thread Size	3/4 - 20 UNEF-2A
Mating RetentionWithPanel Mount FeatureWithHousing FeaturesStraight	Polarization Code	A
Panel Mount FeatureWithHousing FeaturesStraight	Connector Mounting Type	Panel Mount
Housing Features Body Orientation Straight	Mating Retention	With
Body Orientation Straight	Panel Mount Feature	With
	Housing Features	
Housing Color Black	Body Orientation	Straight
	Housing Color	Black

Housing Material

Nylon, Thermoplastic

13

Circular Connector Shell Size	Circul	ar Conne	ctor Shell	Size
-------------------------------	--------	----------	------------	------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Fluid Resistance	None
Operation/Application	
Circuit Application	Power & Signal
Shielded	No
Industry Standards	
Agency/Standard	VDE
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1
Packaging Method	Package

Product Compliance

Circular Power Connectors, Housing, 600 VDC, Wire-to-Wire, 7 Position, Wire & Cable, Receptacle, Pin, Power & Signal, Black, All Plastic, AMP CPC



For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-



Compatible Parts




TE Part # 211399-1 CPC PLUG ASSEMBLY SIZE 13-7

Also in the Series | AMP CPC

Circular Power Connectors, Housing, 600 VDC, Wire-to-Wire, 7 Position, Wire & Cable, Receptacle, Pin, Power & Signal, Black, All Plastic, AMP CPC



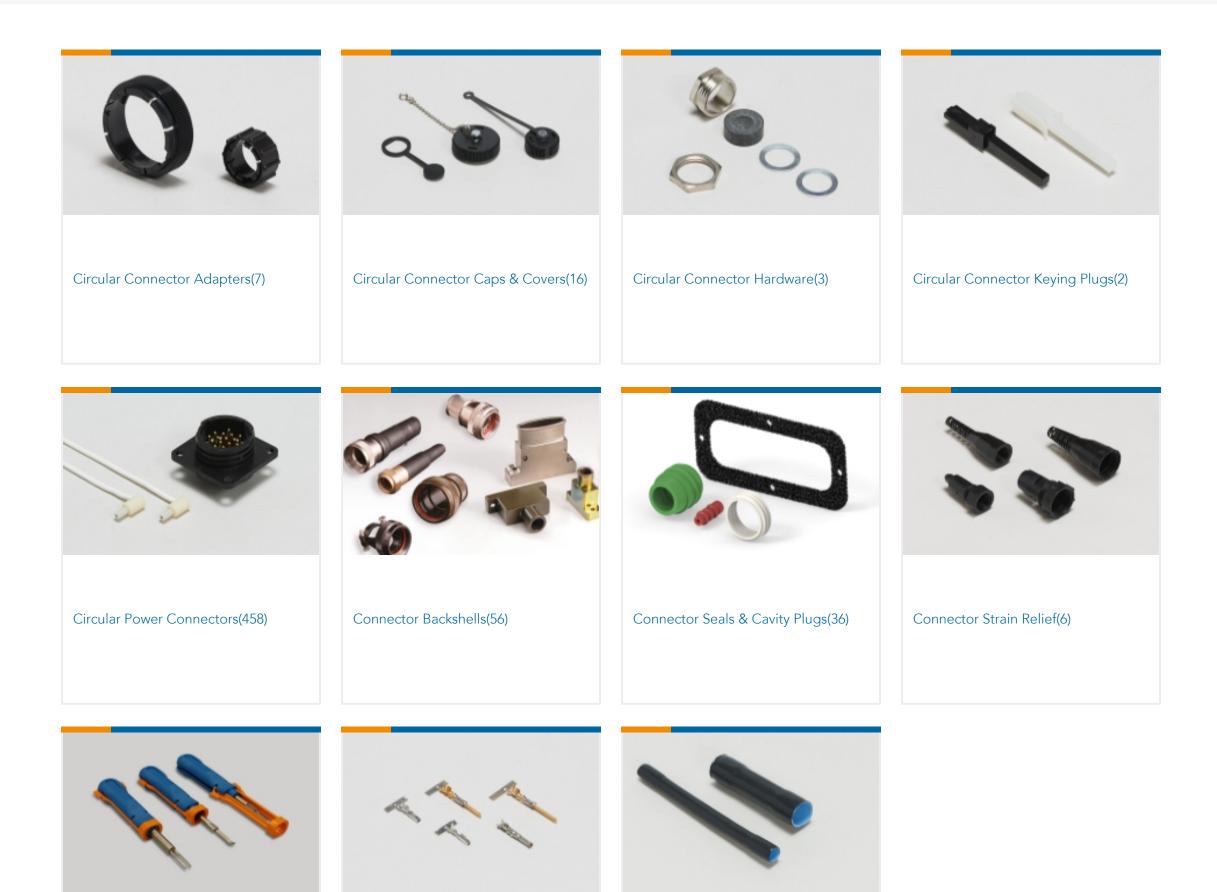

Insertion & Extraction Tools(1)

Power Contacts(6)

Sealing Sleeves(2)

Customers Also Bought



Documents

Circular Power Connectors, Housing, 600 VDC, Wire-to-Wire, 7 Position, Wire & Cable, Receptacle, Pin, Power & Signal, Black, All Plastic, AMP CPC



Product Drawings RECEPT,SZ 13-7,CPC English **CAD** Files 3D PDF 3D Customer View Model ENG_CVM_CVM_211401-8_AE.2d_dxf.zip English Customer View Model ENG_CVM_CVM_211401-8_AE.3d_igs.zip English **Customer View Model** ENG_CVM_CVM_211401-8_AE.3d_stp.zip English By downloading the CAD file I accept and agree to the **Terms and Conditions** of use **Product Specifications Application Specification**

English

Product Environmental Compliance TE Material Declaration

English

Instruction Sheets Instruction Sheet (U.S.) English Instruction Sheet (U.S.)

English

Agency Approvals CSA Certificate

English