


### METRIMATE

TE Internal #: 213973-1 Rectangular Connector Housings, Wire-to-Panel / Wire-to-Wire, 30 Position, .197 in [5 mm] Centerline, 2 Row, Polyester GF, Plug, Socket

#### View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Housings

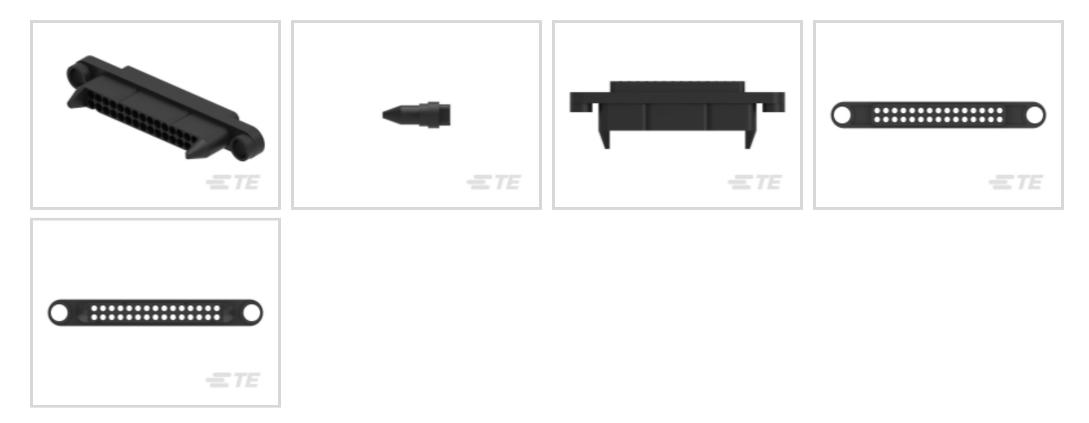

Connector System: Wire-to-Panel, Wire-to-Wire

Number of Positions: 30

Centerline (Pitch): 5 mm [.197 in ]

Number of Rows: 2

Housing Material: Polyester GF

## Features

**E** 

### **Product Type Features**

Compatible With Discrete Wire Type	Stranded
Connector System	Wire-to-Panel, Wire-to-Wire
Connector & Housing Type	Plug
Sealable	No
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Number of Positions	30
Number of Rows	2
Electrical Characteristics	
Operating Voltage	600 VAC
Contact Features	
Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	13 A

**C** For support call+1 800 522 6752

Rectangular Connector Housings, Wire-to-Panel / Wire-to-Wire, 30 Position, .197 in [5 mm] Centerline, 2 Row, Polyester GF, Plug, Socket



### Mechanical Attachment

Panel Mount Feature Type	Screw Mount
Connector Mounting Type	Panel Mount
Housing Features	
Housing Color	Black
Centerline (Pitch)	5 mm[.197 in]
Housing Material	Polyester GF
Dimensions	
Panel Thickness (Recommended)	.8 – 2.3 mm[.031 – .091 in]
Product Width	15.11 mm
Product Length	122.99 mm
Row-to-Row Spacing	5.08 mm[.2 in]
Usage Conditions	
Operating Temperature Range	-55 – 130 °C[-67 – 266 °F]
Operation/Application	
Circuit Application	Power & Signal

## Industry Standards

CSA Rating	LR 16455
Agency/Standard	CSA, UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
·	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

Rectangular Connector Housings, Wire-to-Panel / Wire-to-Wire, 30 Position, .197 in [5 mm] Centerline, 2 Row, Polyester GF, Plug, Socket



Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




## **Customers Also Bought**



Rectangular Connector Housings, Wire-to-Panel / Wire-to-Wire, 30 Position, .197 in [5 mm] Centerline, 2 Row, Polyester GF, Plug, Socket





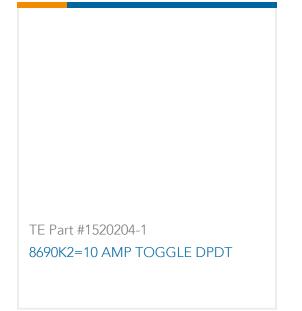

## Documents

Product Drawings METRIMATE 30P PLUG HOUSING

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_213973-1\_C.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_213973-1\_C.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_213973-1\_C.3d\_stp.zip

English

### 3D PDF

English

Customer View Model ENG\_CVM\_213973-1\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_213973-1\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_213973-1\_B.3d\_stp.zip

English

**C** For support call+1 800 522 6752

Rectangular Connector Housings, Wire-to-Panel / Wire-to-Wire, 30 Position, .197 in [5 mm] Centerline, 2 Row, Polyester GF, Plug, Socket



By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages METRIMATE\_PIN\_SOCKET\_CATALOG

English

**Product Specifications** 

**Application Specification** 

English

Product Environmental Compliance MD\_213973-1\_10032016236\_dmtec

English

MD\_213973-1\_10032016236\_dmtec

English